



DL50-P2225

Dx50

MID RANGE DISTANCE SENSORS

SICK
Sensor Intelligence.



Ordering information

| Type | Part no. |
|------------|----------|
| DL50-P2225 | 1048418 |

Other models and accessories → www.sick.com/Dx50



Detailed technical data

Mechanics/electronics

| | |
|--|--------------------------------|
| Supply voltage V_s | DC 10 V ... 30 V ¹⁾ |
| Ripple | $\leq 5 V_{pp}$ ²⁾ |
| Power consumption | $\leq 2.1 W$ ³⁾ |
| Initialization time | ≤ 250 ms |
| Warm-up time | ≤ 15 min |
| Housing material | Metal (zinc diecast) |
| Window material | Plastic (PMMA) |
| Connection type | Male connector, M12, 8-pin |
| Indication | LC display, 2 x LED |
| Weight | 200 g |
| Dimensions (W x H x D) | 36.1 mm x 62.7 mm x 57.7 mm |
| Enclosure rating | IP65 |
| Protection class | III |

¹⁾ Limit values, reverse-polarity protected, operation in short-circuit protected network: max. 8 A.

²⁾ May not fall short of or exceed V_S tolerances.

³⁾ Without load.

Safety-related parameters

| | |
|-------------------------|-----------|
| MTTF_D | 101 years |
|-------------------------|-----------|

Performance

| | |
|--|---|
| Measurement range min ... max: | 200 mm ... 50,000 mm, on "diamond grade" reflective tape ¹⁾ |
| Target | Reflector |
| Resolution | 0.1 mm |
| Repeatability | ≥ 0.25 mm ^{2) 3) 4)} |
| Accuracy | ± 3 mm ⁵⁾ |
| Response time | 10 ms ... 160 ms, 10 ms / 40 ms / 160 ms ^{3) 6)} |
| Output time | 2.5 ms ^{7) 8)} |
| Light source | Laser, red visible red light |
| Laser class | 1 (IEC 60825-1:2014, EN 60825-1:2014) ⁹⁾ |
| Typ. light spot size (distance) | 15 mm x 15 mm (10 m) |
| Additional function | Set moving average fast/medium/slow, switching mode: distance to object (DtO), teach-in, scaling and inversion of digital output, set hysteresis, Multifunctional input and output: Laser off, external teach, digital output 2, deactivated, Adjustable resolution of the SSI distance output: 0.0625 mm / 0.1 mm / 0.125 mm / 1 mm, Unique measurement value, crosstalk safety, switch-off display, reset to factory default, lock user interface |
| Average laser service life (at 25 °C) | 100,000 h |

- ¹⁾ On "diamond grade" reflective tape.
²⁾ Equivalent to 1 σ .
³⁾ Dependent on the averaging setting: fast/medium/slow.
⁴⁾ Typical value.
⁵⁾ 200 mm ... 4,000 mm: $\leq \pm 5$ mm.
⁶⁾ Lateral entry of the object into the measuring range.
⁷⁾ For baud rate 115,200 bps.
⁸⁾ Continuous change of distance in measuring range.
⁹⁾ Wavelength: 658 nm; max. output: 80 mW; pulse duration: 2.5 ns; duty cycle: 1/240.

Interfaces

| | |
|-----------------------------------|--|
| Serial | ✓, RS-422 |
| Digital output | |
| Number | 1 ... 2 ^{1) 2)} |
| Type | PNP |
| Function | Dependent on the set function MF: digital output 2 / laser off, external teach |
| Maximum output current I_A | ≤ 100 mA |
| Multifunctional input (MF) | - / 1 x ^{3) 4) 5)} |
| Hysteresis | 1 mm ... 1,000 mm |

- ¹⁾ Output Q short-circuit protected.
²⁾ PNP: HIGH = V_S - (< 2.5 V) / LOW = 0 V.
³⁾ Dependent on the set function MF: digital output 2 / laser off, external teach.
⁴⁾ Response time ≤ 60 ms.
⁵⁾ PNP: HIGH = V_S / LOW = ≤ 2.5 V.

Ambient data


| | |
|---------------------------------------|--|
| Ambient temperature, operation | -30 °C ... +65 °C -30 °C ... +80 °C, operation with 2 cooling plates -30 °C ... +140 °C, operation with 2 cooling plates and protection filter |
| Ambient temperature, storage | -40 °C ... +75 °C |

| | |
|--|-----------------------------|
| Max. rel. humidity (not condensing) | ≤ 95 % |
| Typ. Ambient light immunity | 40,000 lx |
| Vibration resistance | EN 60068-2-6, EN 60068-2-64 |
| Shock resistance | EN 60068-2-27 |

Classifications

| | |
|-----------------------|----------|
| eCl@ss 5.0 | 27270801 |
| eCl@ss 5.1.4 | 27270801 |
| eCl@ss 6.0 | 27270801 |
| eCl@ss 6.2 | 27270801 |
| eCl@ss 7.0 | 27270801 |
| eCl@ss 8.0 | 27270801 |
| eCl@ss 8.1 | 27270801 |
| eCl@ss 9.0 | 27270801 |
| eCl@ss 10.0 | 27270801 |
| eCl@ss 11.0 | 27270801 |
| eCl@ss 12.0 | 27270916 |
| ETIM 5.0 | EC001825 |
| ETIM 6.0 | EC001825 |
| ETIM 7.0 | EC001825 |
| ETIM 8.0 | EC001825 |
| UNSPSC 16.0901 | 41111613 |


Dimensional drawing (Dimensions in mm (inch))

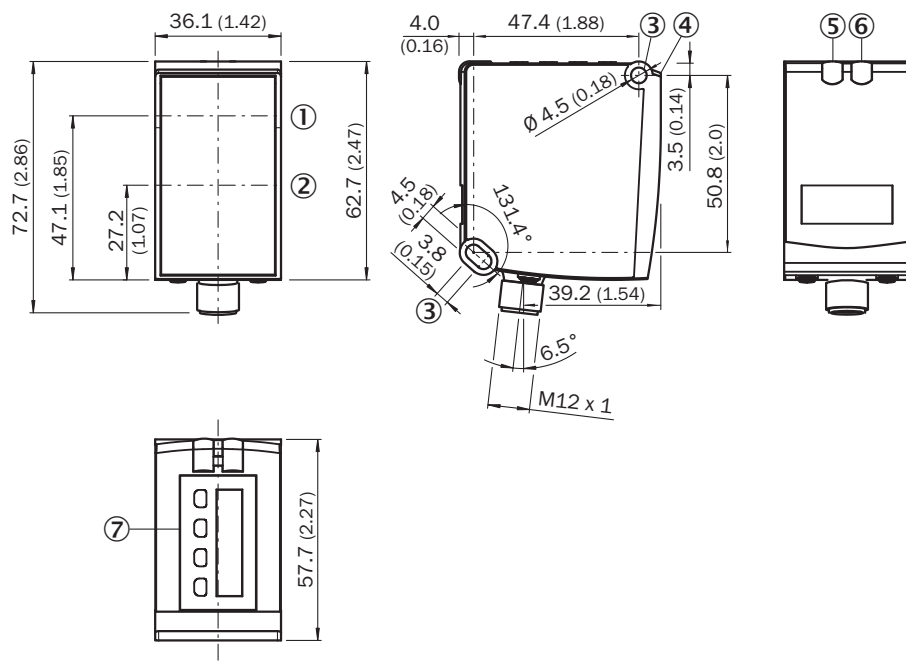


- ① Optical axis, sender
- ② Optical axis, receiver
- ③ Fixing hole
- ④ Reference surface = 0 mm
- ⑤ Status indicator digital output Q₁ (orange)
- ⑥ DT50/DT50 Hi/DL50: Status display for supply voltage active (green), DS50/DL50 Hi: Status display of digital output Q₂ (orange)
- ⑦ Control elements and display

Connection type

Male connector M12, 8-pin






Connection diagram



① Multifunctional in- and output

Recommended accessories

Other models and accessories → www.sick.com/Dx50

| | Brief description | Type | Part no. |
|---|---|-------------------|----------|
| Plug connectors and cables | | | |
|  | Head A: female connector, M12, 8-pin, straight Head B: Flying leads Cable: PUR, halogen-free, shielded, 2 m | YF2A68-020XXXLEAX | 6032448 |
| Reflectors | | | |
|  | Reflector plate, "diamond grade" reflective tape, 330 mm x 330 mm, base plate material: aluminum, screw connection, Screw-on, 4 hole mounting | PL240DG | 1017910 |
| Terminal and alignment brackets | | | |
|  | Alignment unit, steel, zinc coated, mounting hardware for the sensor included | BEF-AH-DX50 | 2048397 |

Recommended services

Additional services → www.sick.com/Dx50

| | Type | Part no. |
|--|--|----------|
| Extended warranty | | |
| <ul style="list-style-type: none"> • Product area: Identification solutions, machine vision, Distance sensors, Detection and ranging solutions • Range of services: The services correspond to the scope of the statutory manufacturer warranty (SICK general terms of delivery). • Duration: Five-year warranty from delivery date. | Extended warranty for a total of five years from delivery date | 1680671 |

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com