




A system of command and control wireless devices based on Zigbee technology that offers innovative solutions for the renovation of buildings, minimizing the structural interventions. Zigbee is a safe and reliable system because the data exchanged are encrypted and every node of the network always ensures reachability among all the devices (mesh network). The Zigbee devices enrich the range of home&building automation solutions by Gewiss and can be managed via App, with smartphone and tablet, through the Smart Gateway.

Catégorie	Contacts interface	Protocole de communication	Zigbee (IEEE 802.15.4)
Tension d'alimentation	Alimenté par batterie	Piles d'alimentation	CR2032 replaceable
Output power	8 dBm	N. canaux en entrée	2
Tension des entrées	Libre de potentiel	Longueur max des câbles	15 m
Norme	2014/53/EU, EN 60669-2-1, EN 60669-1, ETSI EN 300-328	Indice de protection	IP20
Température de fonctionn.	-5 ÷ +45 °C	Température de stockage	-25 ÷ +70 °C
Relative humidity (non-condensative)	Max 93%	Dimensions LxHxP (mm)	42x40x20
Electrocod	051A		

DIMENSIONS

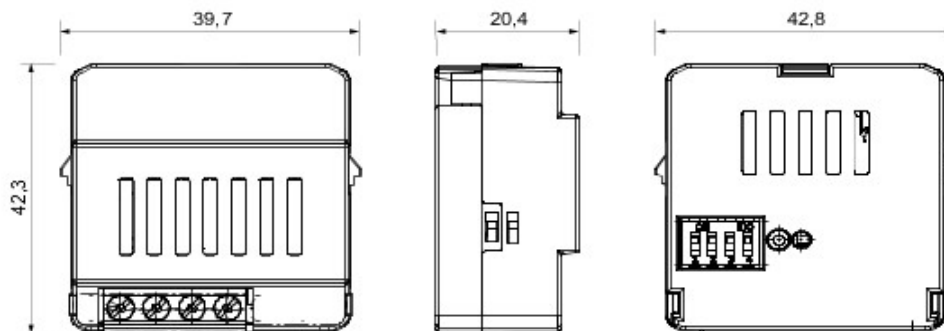

SYMBOLE TECHNIQUE

IP

IP20

NORMES ET HOMOLOGATIONS

