


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

- \*\*1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AND TO INDICATE COLOR AND OR PACKAGE QUANTITY.
- 2. CONSTRUCTED WITH CAT6A SCREENED 9 WIRE, FOUR SHIELDED TWISTED PAIR PLUS A 9<sup>TH</sup> WIRE, STRANDED 26AWG LSZH CABLE.
- 3. TERMINATED WITH (8 POSITION) SHIELDED MODULAR PLUG AND 1-9<sup>TH</sup> POSITION CONTACT AT BOTH ENDS.
- 4. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

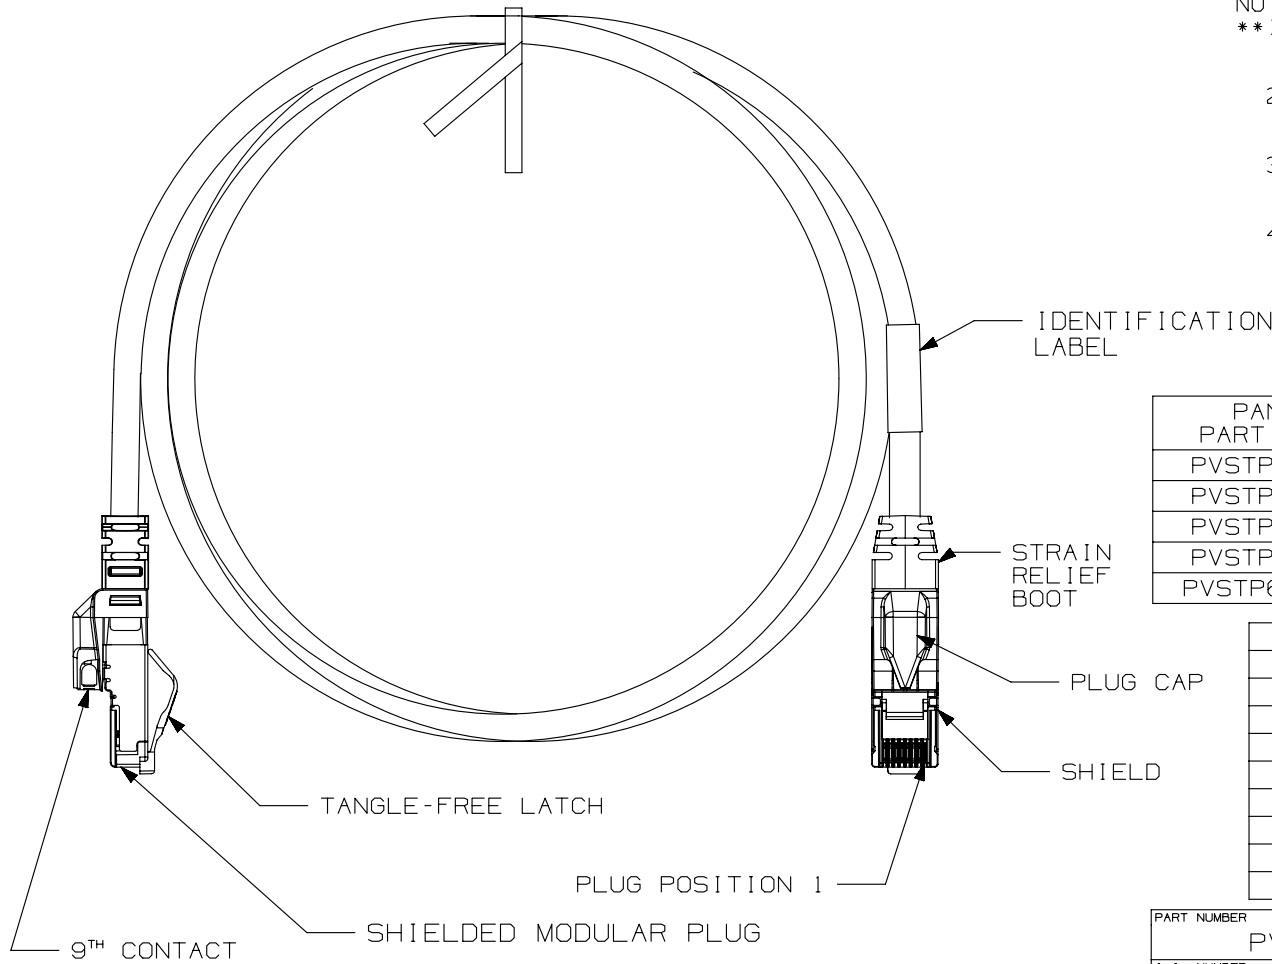

PANDUIT PART NUMBER	MINIMUM CABLE LENGTH	WEIGHT
PVSTP6X1MB**	1 METER	68g/EACH
PVSTP6X2MB**	2 METERS	115g/EACH
PVSTP6X3MB**	3 METERS	156g/EACH
PVSTP6X5MB**	5 METERS	234g/EACH
PVSTP6X10MB**	10 METERS	433g/EACH

EIA/TIA T568B WIRING SCHEME	
PLUG POSITION	CABLE WIRE
1	ORANGE/WHITE
2	ORANGE
3	GREEN/WHITE
4	BLUE
5	BLUE/WHITE
6	GREEN
7	BROWN/WHITE
8	BROWN

PART NUMBER PVSTP6X*MB**	PRODUCT SPEC/PKG SPEC N/A
I.I. NUMBER N/A	WORK INSTRUCTION N/A

TITLE  
**PANVIEW TX6A 10 GIG SHIELDED (LSZH) PATCH CORD**  
CUSTOMER DRAWING


ITEM REVISION NAME  
**M02489AC/00**

DATASET FILE NAME  
**M02489AC\_DC03/00D**



UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]  
 .x ± .1 [ 2.54 ]      .xxx ± .005 [ .127 ]  
 .xx ± .01 [ .25 ]      ANGLES ± 5 °

MATERIAL:  
DRAWING NUMBER:  
**02489-03**



THIRD ANGLE PROJECTION

3	1-31-04	BJN	MATO	EJH	UPDATED	02489-03
---	---------	-----	------	-----	---------	----------

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
							MLJ	10-03-06	DCK	NONE		A

D10100DA/14