


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. DIAMETER DIMENSION SHOWN FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [ ] ARE ENGLISH.
3. FOR PART NUMBERS AND LENGTHS OTHER THAN THOSE SHOWN, CONTACT YOUR PANDUIT SALES PERSON.

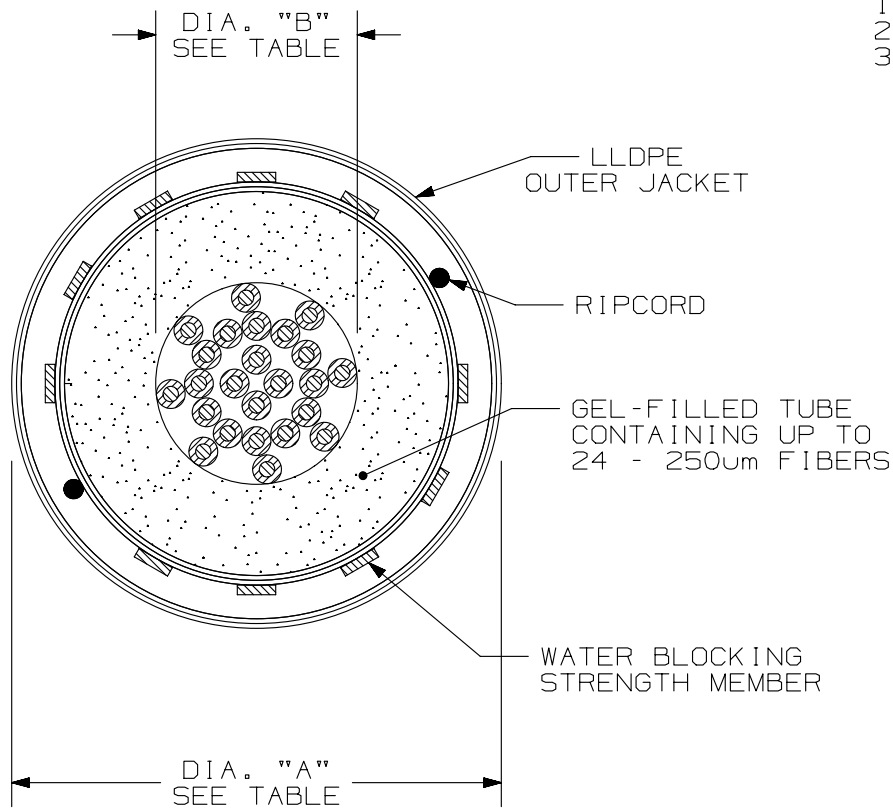

TEMPERATURE		
STORAGE	INSTALLATION	OPERATION
-40° C TO 60° C	-15° C TO 40° C	-30° C TO 60° C

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	01-31-14	SAT	WMA	TCB	RELEASED TO PRODUCTION	M02432CE-DC

TITLE		FIBER OPTIC UNARMORED OUTSIDE PLANT CABLE WITH 24 FIBERS IN A CENTRAL TUBE	
CUSTOMER DRAWING			
ITEM REVISION NAME		M02432CE/00	
DATASET FILE NAME		M02432CE_DC/00A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]		PART NO.	
.x ± .xx ± .03 [ 0.8 ]		SEE TABLE	
.xxx ± .010 [ 0.3 ]		DRAWING NUMBER:	
ANGLES ±		M02432CE-DC	
THIRD ANGLE PROJECTION		SHT 1 OF 2	
DRAWN BY	DATE	CHK	SCALE
SAT	01-31-14	WMA	NONE
			SIZE
			A

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	DESCRIPTION	FIBER COUNT	DIAMETER "A"	DIAMETER "B"	BEND RADIUS (INSTALLATION)	BEND RADIUS (LONG TERM)	TENSILE LOAD (INSTALLATION)	TENSILE LOAD (LONG TERM)	ATTENUATION
FPUN502	MULTIMODE 50/125 OM2 INDOOR/OUTDOOR CABLE	2	6.5mm	2.8mm	100mm	60mm	1500mm	750mm	3.5dB/km @ 850nm 1.5dB/km @ 1300nm
FPUN504		4							
FPUN506		6							
FPUN508		8							
FPUN512		12							
FPUN524	24	7.0mm	3.5mm	3.5dB/km @ 850nm 1.0dB/km @ 1300nm					
FPUN602	2								
FPUN604	4								
FPUN606	6								
FPUN608	8								
FPUN612	12	7.0mm	3.5mm	3.5dB/km @ 850nm 1.5dB/km @ 1300nm					
FPUN624	24								
FQUNX02	2								
FQUNX04	4								
FQUNX06	6								
FQUNX08	8	6.5mm	2.8mm	3.5dB/km @ 850nm 1.5dB/km @ 1300nm					
FQUNX12	12								
FQUNX24	24								
FQUNZ02	2								
FQUNZ04	4								
FQUNZ06	6	6.5mm	2.8mm	3.5dB/km @ 850nm 1.5dB/km @ 1300nm					
FQUNZ08	8								
FQUNZ12	12								
FQUNZ24	24								
FPUN902	2								
FPUN904	4	6.5mm	2.8mm	0.7dB/km @ 1310nm 0.7dB/km @ 1550nm					
FPUN906	6								
FPUN908	8								
FPUN912	12								
FPUN924	24								
		24	7.0mm	3.5mm					

B

B

A

A

						TITLE FIBER OPTIC UNARMORED OUTSIDE PLANT CABLE WITH 24 FIBERS IN A CENTRAL TUBE CUSTOMER DRAWING						
						ITEM REVISION NAME M02432CE/00			<b>PANDUIT</b>			
						DATASET FILE NAME M02432CE_DC/00A						
						UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm) .X ± .xxx ± .010 (0.3) .XX ± .03 (0.8) ANGLES ±			PART NO. SEE TABLE			
00	01-31-14	SAT	WMA	TCB	RELEASED TO PRODUCTION	M02432CE-DC			DRAWING NUMBER: M02432CE-DC			
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY SAT	DATE 01-31-14	CHK WMA	SCALE NONE	SHT 2 OF 2	SIZE A