



LL3-DK21

LL3

FIBERS

SICK
Sensor Intelligence.



Ordering information

| Type | Part no. |
|----------|----------|
| LL3-DK21 | 5313023 |

Other models and accessories → www.sick.com/LL3

Detailed technical data

Features

| | |
|--|--|
| Device type | Fibers |
| Functional principle | Proximity system |
| For fiber-optic sensor | GLL170(T), WLL180, WLL80 |
| Fiber length | 500 mm |
| Fiber material | Polymethylmethacrylat (PMMA) |
| Jacket material | Polyethylen (PE) |
| Fiber head material | Stainless steel |
| Outer diameter, fiber-optic cable connection | 1.3 mm |
| Fiber-optic cable cuttable | ✓ |
| Thread diameter (housing) | M3 |
| Fiber-optic head design | Threaded sleeve |
| Fiber arrangement | Coaxial arrangement |
| Core structure | S: Ø 0,25 mm, R: 10 x Ø 0,125 mm ¹⁾ Coaxial arrangement |
| Angle of dispersion < 60° | No |
| Compatibility with infrared light (1,450 nm) | No |
| Highly flexible/elastic fibers (bend radius 1–4 mm) | No |
| Adapter end sleeves required | No |
| Angle of dispersion | 60° |
| Integrated lens | No |
| Minimal object diameter | 0.013 mm ²⁾ |
| Included with delivery | Mounting, 2 x M3 hexagon nut, 2 x washer |
| Compatibility tip adapters | Yes |
| Special features | Coaxial construction for exact switching, compact head |

¹⁾ C = Coaxial, S = Sender, E = Receiver.

²⁾ Minimum detectable object was determined at optimum measuring distance and optimum setting.

Mechanics/electronics

| | |
|---------------------------------------|-------------------|
| Bend radius, fibre-optic cable | 15 mm |
| Ambient operating temperature | -40 °C ... +70 °C |

Classifications

| | |
|-------------------|----------|
| ECLASS 5.0 | 27270905 |
|-------------------|----------|

| | |
|-----------------------|----------|
| ECLASS 5.1.4 | 27270905 |
| ECLASS 6.0 | 27270905 |
| ECLASS 6.2 | 27270905 |
| ECLASS 7.0 | 27270905 |
| ECLASS 8.0 | 27270905 |
| ECLASS 8.1 | 27270905 |
| ECLASS 9.0 | 27270905 |
| ECLASS 10.0 | 27270905 |
| ECLASS 11.0 | 27270905 |
| ECLASS 12.0 | 27270905 |
| ETIM 5.0 | EC002651 |
| ETIM 6.0 | EC002651 |
| ETIM 7.0 | EC002651 |
| ETIM 8.0 | EC002651 |
| UNSPSC 16.0901 | 39121528 |

Sensing ranges with WLL80

| | |
|---|--------|
| Operating mode 16 μs | 15 mm |
| Operating mode 70 μs | 60 mm |
| Operating mode 250 μs | 95 mm |
| Operating mode 500 μs | 115 mm |
| Operating mode 1 ms | 135 mm |
| Operating mode 2 ms | 180 mm |
| Operating mode 8 ms | 260 mm |

Sensing ranges with WLL180T

| | |
|---|---|
| Operating mode 16 μs | 14 mm |
| Operating mode 70 μs | 45 mm |
| Operating mode 250 μs | 75 mm |
| Operating mode 2 ms | 135 mm |
| Operating mode 8 ms | 200 mm |
| Note | Sensing ranges related to fiber-optic sensors with type of light: visible red light |

Sensing ranges with GLL170


| | |
|---|-------|
| Operating mode 250 μs | 70 mm |
|---|-------|

Sensing ranges with GLL170T

| | |
|---|-------|
| Operating mode 50 μs | 20 mm |
| Operating mode 250 μs | 40 mm |

Dimensional drawing (Dimensions in mm (inch))

LL3-DK21

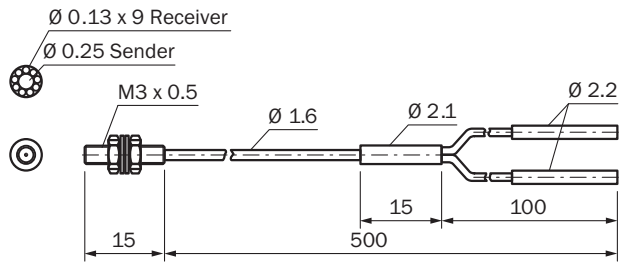

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com