



USB interface,
A/A female type
connection
LPCD0

Product designation

Product type designation

General characteristics

Material

Polyamide

IEC degree of protection

IP65 on front and
IP20 on rear

Electrical characteristics

Rated insulation voltage U_i IEC/EN

V 5VAC/DC

Contact resistance

mΩ ≤30

Mechanical features

Weight

g 18

UL technical data

UL degree of protection

1, 2, 3R, 4, 4X,
12, 12K on front

Ambient conditions

Temperature


Operating temperature

min	°C	-25
max	°C	+70

Storage temperature

min	°C	-40
max	°C	+85

Dimensions

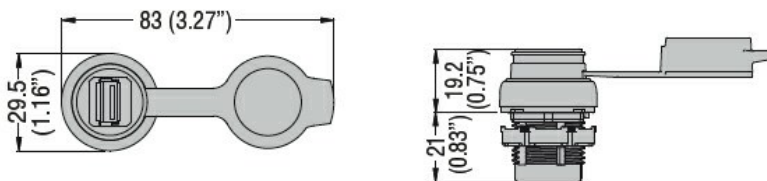

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1
UL508

Certificates

cULus
EAC

ETIM classification

ETIM 8.0

EC000797 -
USB-Hub