




ENERG

енергия · ενεργεια



Model Indoor unit **PEAD-M50JA2**
Outdoor unit **SUZ-M50VA**

SEER

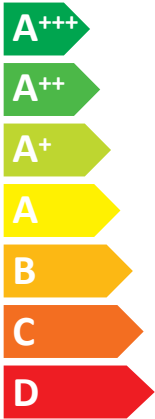


A++

kW 5,0

SEER 6,3

kWh/annum 277

SCOP

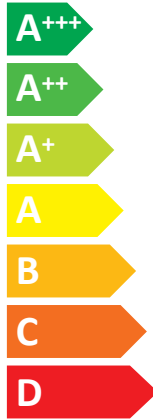

A+

kW X 4,3 X

SCOP X 4,2 X

kWh/annum X 1417 X



58dB



64dB



ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

626/2011

Ⓐ	Model	Ⓑ	Indoor unit	PEAD-M50JA2			
		Ⓒ	Outdoor unit	SUZ-M50VA			
Ⓓ	Sound power levels on cooling mode	Ⓔ	Inside	dB	58		
			Ⓕ	Out-side	dB	64	
				R32 GWP 550 *1			
Ⓗ	Cooling	SEER			6,3		
		Ⓖ	Energy efficiency class	A++			
		Ⓚ	Annual electricity consumption *2	kWh/a	277		
		Ⓛ	Design load	kW	5,0		
		SCOP			4,2		
Ⓜ	Heating (Average season)	Ⓖ	Energy efficiency class	A+			
		Ⓚ	Annual electricity consumption *2	kWh/a	1417		
		Ⓛ	Design load	kW	4,3		
		Ⓝ	De-clared capacity	Ⓟ	at reference design temperature	kW	3,8 (-10°C)
				Ⓡ	at bivalent temperature	kW	3,8 (-7°C)
				Ⓢ	at operation limit temperature	kW	3,8 (-10°C)
		Ⓣ	Back up heating capacity	kW	0,5		

	Deutsch	Italiano	Svenska	Polski	Eesti	Malti	Русский	
	Français	Ελληνικά	Česky	Slovensko	Gaeilge	Suomi	Norsk	
	Nederlands	Português	Slovensky	Български	Latviski	Türkçe	Українська	
	Español	Dansk	Magyar	Română	Lietuvių k.	Hrvatski		
Ⓐ	Modell	Modello	Modell	Model	Mudel	Mudell	Модель	
	Modèle	Μοντέλο	Model	Model	Déanamh	Malli	Модель	
	Model	Modelo	Model	Модел	Modelis	Model	Модель	
	Modelo	Model	Modell	Model	Modelis	Model		
	Innengerät	Unità interna	Inomhusenhet	Jednostka wewnętrzna	Siseseade	Unità għal ġewwa		Внутренний прибор
Ⓑ	Appareil intérieur	Εσωτερική μονάδα	Vnitřní jednotka	Notranja enota	Aonad laistigh	Sisäyksikkö		Innendørsenhet
	Binnenunit	Unidade interior	Vnúťorná jednotka	Вътрешно тяло	Iekštelņu ierīce	İç ünite		Внутрішній блок
	Unidad interior	Indendørsenhet	Beltéri egység	Unitate de interior	Patalpoje montuojamas įrenginys	Unutarnja jedinica		
Ⓒ	Außengerät	Unità esterna	Utomhusenhet	Jednostka zewnętrzna	Välisseade	Unità għal barra		Narужный прибор
	Modèle extérieur	Εξωτερική μονάδα	Vnější jednotka	Zunanja enota	Aonad lasmuigh	Ulkoyksikkö		Utendørsenhet
	Buitenunit	Unidade exterior	Vonkajšia jednotka	Външно тяло	Ārtelpas ierīce	Diş ünite		Зовнішній блок
Ⓓ	Unidad exterior	Udendørsenhet	Kütléri egység	Unitate de exterior	Lauke montuojamas įrenginys	Vanjska jedinica		
	Schallleistungspegel im Kühlmodus	Livelli di potenza sonora in modalità di raffreddamento	Bullernivå i nedkylningsläget	Poziom mocy dźwięku w trybie chłodzenia	Müratasemed jahutusrežimis	Livelli tal-qawwa tal-hsejjes fil-modalità tat-kessiġ		Значения уровня звуковой мощности в режиме охлаждения
	Niveaux de puissance corrects en mode de refroidissement	Επίπεδα ισχύος ήχου στην κατάσταση ψύξης	Úrovně hlučnosti v režimu chlazení	Ravni zvočne moči v načinu hlajenja	Leibhéal chumhachta fuaimne ar mhodh fuairithe	Äänvoimakkuuastot viilennystilassa		Lydtrykknivåer i avkjølingsmodus
Ⓔ	Geluidsniveaus in koelstand	Níveis de potência sonora em modo de arrefecimento	Hladiny akustického výkonu v režime chladenia	Нива на звуковата мощност в режим на охлаждане	Akustiskās jaudas līmenis dzesēšanas režīmā	Soğutma modunda ses gücü düzeyleri		Рівні звукової потужності у режимі охолодження
	Niveles de potencia del sonido en el modo de refrigeración	Lydstyrkeniveauer i kølefunktion	Hangnyomásszintek hűtés üzem-módban	Nivel sonor în modul de răcire	Garso galios lygis vėsavimo režimu	Razine zvučnog tlaka pri hlađenju		
	Innen	Interno	Innsida	Wewnątrz	Sees	Ġewwa		Внутри
Ⓕ	À l'intérieur	Εσωτερικό	Uvnitř	Znotraj	Laistigh	Sisäpuoli		Innvendig
	Binnenkant	Interior	Vo vnútri	Вътре	Iekšelpās	İç taraf		Усередині
	Interior	Indvendig	Bent	Interior	Vidinis	Unutra		
Ⓖ	Außen	Esterno	Utsida	Na zewnątrz	Väljas	Barra		Снаружи
	À l'extérieur	Εξωτερικό	Venku	Zunaj	Lasmuigh	Ulkopuoli		Utvendig
	Buitenkant	Exterior	Vonku	Na открито	Ārtelpā	Diş taraf		Назовні
Ⓕ	Exterior	Udvendig	A szabadban	Exterior	Išorinis	Vani		
	Kühlmittel	Refrigerante	Köldmedel	Czynnik chłodniczy	Külmutusagens	Refrigerant		Хладагент
	Réfrigérant	Ψυκτικό	Chladivo	Hladivo sredstvo	Cuisneán	Kylmäaine		Кjølemedium
Ⓕ	Koelmiddel	Refrigerante	Chladivo	Хладилен агент	Aukstumagents	Soğutucu		Холодоагент
	Refrigerante	Kølemiddel	Hűtőközeg	Refrigerent	Šaldalas	Rashladno sredstvo		

	Deutsch	Italiano	Svenska	Polski	Eesti	Malti	Русский	
	Français	Ελληνικά	Česky	Slovensko	Gaeilge	Suomi	Norsk	
	Nederlands	Português	Slovensky	Български	Latviski	Türkçe	Українська	
	Español	Dansk	Magyar	Română	Lietuvių k.	Hrvatski		
Ⓗ	Kühlen	Raffreddamento	Kyla	Chłodzenie	Jahutus	Tkessiġ		Охлаждение
	Refridissement	Ψύξη	Chlazení	Hlajenje	Fuarú	Viillennys		Avkjøling
	Koelen	Arrefecimento	Chladenie	Охлаждане	Dzesēšana	Soğutma		Охолодження
	Refrigeración	Køling	Hűtés	Răcire	Vėsiniimas	Hlađenje		
Ⓙ	Energieeffizienzklasse	Classe di efficienza energetica	Energiklass	Klasa energetyczna	Energiatõhususe klass	Klassi tal-eficjenza fl-użu tal-enerġija		Класс эффективности использования энергии
	Classe d'efficacité énergétique	Κλάση ενεργειακής απόδοσης	Třída energetické účinnosti	Razred energetske učinkovitosti	Aicme éifeachtúlachta fuinnimh	Energiatehokkuusluokka		Energieeffektivitetsklasse
	Energie-efficiëntieklasse	Classe de eficiência energética	Tryeda energetickéj účinnosti	Клас на енергийна ефективност	Energoefektivitātes klase	Enerji verimlilik sınıfı		Клас ефективності енергоспоживання
	Clase de eficiencia energética	Energieeffektivitetsklasse	Energiahatekónysági osztály	Clasă de eficiență energetică	Enerģijas vortojimo efektyvumo klasė	Klasa energetiske učinkovitosti		
Ⓚ	Jahresstromverbrauch *2	Consumo annuale di energia elettrica *2	Årlig strömförbrukning *2	Zużycie prądu w skali roku *2	Aastane voolutarbimus *2	Konsum annwali tal-elettriku *2		Годовое потребление электроэнергии *2
	Consommation d'électricité annuelle *2	Ετήσια κατανάλωση ρεύματος *2	Roční spotřeba elektrické energie *2	Letna poraba elektrike *2	Ídiú leictreachais bhliantúil *2	Vuotuinen sähkönkulutus *2		Årlig strømförbruk *2
	Jaarijks elektricitetsverbruik *2	Consumo anual de electricidade *2	Ročná spotřeba elektriny *2	Годишна консумация на електроенергия *2	Gada elektroenerģijas patēriņš *2	Yıllık elektrik tüketimi *2		Річне споживання електроенергії *2
	Consumo anual de electricidad *2	Årligt elförbruk *2	Éves áramfogyasztás *2	Consum anual de electricitate *2	Metinis elektros energijos suvartojimas *2	Godišnja potrošnja električne energije *2		
Ⓛ	Lastauslegung	Carico nominale	Dimensionerande belastning	Maksymalne obciążenie	Projekteeritud koormus	Tagħbija tad-disinn		Расчетная нагрузка
	Charge de calcul	Σχεδιασμός φόρτωσης	Jmenovitě zatížení	Nazivna obremenitev	Lód deartha	Laskettu kuormitus		Utformingsbelastning
	Ontwerpbelasting	Carga nominal	Projektované zaťaženie	Проектен товар	Aprēķina slodze	Tasarim yükü		Розрахункова навантаження
	Carga de diseño	Brugsbelast	Méretezési terhelés	Sarcină nominală	Projektinė apkrova	Težina uređaja		
Ⓜ	Heizen (Jahresdurchschnitt / wärmeres Wetter)	Riscaldamento (Stagione media / calda)	Värme (Genomsnittlig/värmare årstid)	Ogrzewanie (Sezon umiarkowany/ciepły)	Kütmine (keskmise/soojaperiood)	Tishin (Staġun Medju / Aktar Shun)		Нагрев (средний/теплый сезон)
	Chauffage (moyenne saison / saison chaude)	Θέρμανση (Εποχή με μέσες / υψηλότερες θερμοκρασίες)	Topení (přůměrná/teplá sezóna)	Ogrevanje (Povprečni/toplejši letni čas)	Téamh (Séasúr Meánach / Níos teo)	Lämmitys (Normaali / Lämpimämpi kausi)		Oppvarming (gjennomsnittlig / varmere årstid)
	Verwarmen (gemiddeld / warmer seizoen)	Aquecimento (Média estação / estação mais quente)	Vykurovanie (Priemerné/teplejšie obdobie)	Отопление (Средно / Топъл сезон)	Sildīšana (Vidējī siltā/siltā gadalaikā)	Istma (Ortalama / Ilik mevsim)		Опалення (у середній/теплій сезон)
	Calefacción (Promedio / temporada más cálida)	Varme (gennemsnitlig/varmere sæson)	Fűtés (Átlagos/meleg évszak)	Încălzire (Anotimp normal/mai cald)	Šildymas (vidutinis / šiltuoju sezonu)	Zagrijavanje (Prosje / toplija sezona)		
Ⓝ	Nennkapazität	Capacità dichiarata	Deklarerad kapacitet	Deklarowana pojemność	Deklareeritud võimsus	Kapaċità ddiċjarata		Гарантированная мощность
	Capacité déclarée	Δηλωμένη χωρητικότητα	Udåvnad kapacita	Prijavljena zmogljivost	Toilleadh fógartha	Imoittettu teho		Erklæret kapasitet
	Aangegeven capaciteit	Capacidade declarada	Deklarovaný výkon	Объявлена мощность	Deklarētā jauda	Byejan edilen kapasite		Гарантована потужність
	Capacidad declarada	Erklæret kapacitet	Névléges teljesítmény	Capacitate declarată	Deklaruotasis pajēgumas	Deklarirani kapacitet		
Ⓟ	bei angegebener Referenztemperatur	alla temperatura di progetto di riferimento	vid dimensionerande referenstemperatur	w znamionowej temperaturze odniesienia	projekteerimise võrdlustemperatuuri juures	f'temperatura tad-disinn ta' referenza		при эталонной расчетной температуре
	à la température de calcul de référence	σε θερμοκρασία σχεδιασμού αναφοράς	při referenční výpočtové teplotě	ob referenčni nazivni temperaturi	ag teocht deartha tagartha	perusmitoitustalämpötilassa		ved referansetemperatur for utforming
	bij referentieontwerp temperatuur	à temperatura nominal de referència	při referenčnéj výpočtovej teplotě	при изчислителна проектна температура	aprēķina references temperatūrā	referans tasarim sıcaklığında		При эталонній розрахунковій температурі
	a temperatura de diseño de referencia	ved brugsfhængig referencetemperatur	tervezési referencia-hőmértékleten	la temperatura de referință nominală	esant norminei projektinei temperatūrai	pri referentnoj temperaturi		
Ⓡ	bei bivalenter Temperatur	alla temperatura bivalente	vid bivalenten temperatur	w bivalenturze bivalentnej	bivalentse temperatuuri juures	f'temperatura bivalenti		при бивалентной температуре
	à température bivalente	σε θερμοκρασία δισθενούς λειτουργίας	při bivalentní teplotě	при бивалентни температурі	ag teocht dhéfhíusach	kaksiarvoisessa lämpötilassa		ved bivalent temperatur
	bij bivalente temperatuur	à temperatura bivalente	při bivalentnej teplotě	при бивалентна температура	bivalentä temperatūrā	iki deġerli sıcaklığında		При бивалентній температурі
	a temperatura bivalente	ved bivalent temperatur	bivalens hőmértékleten	la temperatura de bivalentă	esant perējimo j dvejopo šildymo režimā temperatūrai	pri bivalentnoj temperaturi		
Ⓢ	bei Temperatur an der Betriebsgrenze	alla temperatura limite di funzionamento	vid driftstemperaturens gränsvärde	w granicznej temperaturze roboczej	töötamise piirtemperatuuri juures	f'temperatura tal-limitu tat-thaddim		при предельной рабочей температуре
	à température de fonctionnement limite	σε θερμοκρασία ορίου λειτουργίας	při teplotě na hranici provozního limitu	pri mejni delovni temperaturi	ag teocht teorann oibriúcháin	toimintarajalämpötilassa		ved temperatur for driftsgrense
	bij grens werkingstemperatuur	à temperatura de limite de funcionamento	při hraničnéj prevádzkovej teplotě	при гранична работна температура	ekspluatācijas robežtemperatūrā	çalışma limiti sıcaklığında		При граничній робочій температурі
	a temperatura limite de funcionamiento	ved driftsgrænsetemperatur	maximális üzemi hőmértékleten	la temperatura limită de funcționare	esant ribinei veikimo temperatūrai	pri graničnoj radnoj temperaturi		
Ⓣ	Backup-Heizleistung	Capacità di riscaldamento addizionale	Kapacitet för reservvärme	Zapasowa pojemność grzewcza	Tagavara küteevõimsus	Kapaċità tat-tishin ta' sostenn		Резервная тепловая мощность
	Capacité de chauffage d'appoint	Δυνατότητα εφεδρικής θέρμανσης	Kapacita záložního vytápění	Rezerвна zmogljivost ogrevanja	Toilleadh téimh chúltaca	Varalämmitystehe		Sikkerhetskapasitet for oppvarming
	Reserveverwarmingcapaciteit	Capacidade de aquecimento de reserva	Výkon záložného vykurovacieho telesa	Мощност на спомогателно електрическо подгряване	Rezerves sildītāja jauda	Yedek ısıtma kapasitesi		Резервна теплова потужність
	Capacidad de calefacción auxiliar	Reservevarmekapacitet	Kisegítő fűtési teljesítmény	Capacitate de încălzire de siguranță	Pagalbinio šildymo pajēgumas	Kapacitet rezervnog grijanja		

PRODUCT INFORMATION (*)

PACKAGED AIR CONDITIONER	INDOOR MODEL	PEAD-M50JA2
	OUTDOOR MODEL	SUZ-M50VA

Function (indicate if present)	
cooling	Y
heating	Y

If function includes heating: Indicate the heating season the information relates to. Indicated values should relate to one heating season at a time. Include at least the heating season 'Average'.	
Average (mandatory)	Y
Warmer (if designated)	N
Colder (if designated)	N

Item	symbol	value	unit
Design load			
cooling	Pdesignc	5.0	kW
heating/Average	Pdesignh	4.3	kW
heating/Warmer	Pdesignh	x	kW
heating/Colder	Pdesignh	x	kW

Item	symbol	value	unit
Seasonal efficiency			
cooling	SEER	6.3	-
heating/Average	SCOP/A	4.2	-
heating/Warmer	SCOP/W	x	-
heating/Colder	SCOP/C	x	-

Declared capacity for cooling, at indoor temperature 27(19)°C and outdoor temperature Tj			
Tj=35°C	Pdc	5.00	kW
Tj=30°C	Pdc	3.70	kW
Tj=25°C	Pdc	2.40	kW
Tj=20°C	Pdc	1.70	kW

Declared energy efficiency ratio, at indoor temperature 27(19)°C and outdoor temperature Tj			
Tj=35°C	EERd	3.70	-
Tj=30°C	EERd	4.90	-
Tj=25°C	EERd	7.80	-
Tj=20°C	EERd	11.50	-

Declared capacity for heating/Average season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=-7°C	Pdh	3.80	kW
Tj=2°C	Pdh	2.40	kW
Tj=7°C	Pdh	1.50	kW
Tj=12°C	Pdh	1.50	kW
Tj=bivalent temperature	Pdh	3.80	kW
Tj=operating limit	Pdh	3.80	kW

Declared coefficient of performance/Average season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=-7°C	COPd	2.90	-
Tj=2°C	COPd	4.30	-
Tj=7°C	COPd	5.20	-
Tj=12°C	COPd	6.40	-
Tj=bivalent temperature	COPd	2.90	-
Tj=operating limit	COPd	2.10	-

Declared capacity for heating/Warmer season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=2°C	Pdh	x	kW
Tj=7°C	Pdh	x	kW
Tj=12°C	Pdh	x	kW
Tj=bivalent temperature	Pdh	x	kW
Tj=operating limit	Pdh	x	kW

Declared coefficient of performance/Warmer season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=2°C	COPd	x	-
Tj=7°C	COPd	x	-
Tj=12°C	COPd	x	-
Tj=bivalent temperature	COPd	x	-
Tj=operating limit	COPd	x	-

Declared capacity for heating/Colder season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=-7°C	Pdh	x	kW
Tj=2°C	Pdh	x	kW
Tj=7°C	Pdh	x	kW
Tj=12°C	Pdh	x	kW
Tj=bivalent temperature	Pdh	x	kW
Tj=operating limit	Pdh	x	kW
Tj=-15°C	Pdh	x	kW

Declared coefficient of performance/Colder season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=-7°C	COPd	x	-
Tj=2°C	COPd	x	-
Tj=7°C	COPd	x	-
Tj=12°C	COPd	x	-
Tj=bivalent temperature	COPd	x	-
Tj=operating limit	COPd	x	-
Tj=-15°C	COPd	x	-

Bivalent temperature			
heating/Average	Tbiv	-7	°C
heating/Warmer	Tbiv	x	°C
heating/Colder	Tbiv	x	°C

Operating limit temperature			
heating/Average	Tol	-10	°C
heating/Warmer	Tol	x	°C
heating/Colder	Tol	x	°C

Cycling interval capacity			
for cooling	Pcycc	x	kW
for heating	Pcyh	x	kW
Degradation co-efficient cooling	Cdc	0.25	-

Cycling interval efficiency			
for cooling	EERcyc	x	-
for heating	COPcyc	x	-
Degradation co-efficient heating	Cdh	0.25	-

Electric power input in power modes other than 'active mode'			
off mode	POFF	8	W
standby mode	PSB	8	W
thermostat - off mode	PTO(c/h)	17 / 22	W
crankcase heater mode	PCK	0	W

Annual electricity consumption			
cooling	QCE	277	kWh/a
heating/Average	QHE	1417	kWh/a
heating/Warmer	QHE	x	kWh/a
heating/Colder	QHE	x	kWh/a

Capacity control (indicate one of three options)	
fixed	N
staged	N
variable	Y

Other items			
Sound power level (indoor/outdoor)	LWA	58 / 64	dB(A)
Global warming potential	GWP	550	kgCO2eq.
Rated air flow (indoor/outdoor)	-	1020 / 2748	m3/h

Contact details for obtaining more information	MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan E-mail: melshierp@MitsubishiElectric.co.jp
--	---

(*) This information is based on the "product information requirement" in COMMISSION REGULATION (EU) No206/2012.

TECHNICAL DOCUMENTATION ⁽¹⁾			
--	--	--	--

PACKAGED AIR CONDITIONER	INDOOR MODEL	PEAD-M50JA2	250H900W732D (mm)
	OUTDOOR MODEL	SUZ-M50VA	714H800W285D (mm)

Function	
cooling	Y
heating	Y


The heating season	
Average (mandatory)	Y
Warmer (if designated)	N
Colder (if designated)	N

Capacity control	
fixed	N
staged	N
variable	Y

Item	symbol	value	unit
Seasonal efficiency ⁽²⁾			
cooling	SEER	6.3	-
heating/Average	SCOP/A	4.2	-
heating/Warmer	SCOP/W	x	-
heating/Colder	SCOP/C	x	-

Energy efficiency class			
cooling	SEER	A++	-
heating/Average	SCOP/A	A+	-
heating/Warmer	SCOP/W	x	-
heating/Colder	SCOP/C	x	-

Other items			
Sound power level (indoor/outdoor)	LWA	58 / 64	dB(A)
Refrigerant	-	R32	-
Global warming potential	GWP	550	kgCO ₂ eq.

identification and signature of the person empowered to bind the supplier	
	Tadashi Saito Department Manager, Quality Assurance Department MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO.,LTD

(1) This information is based on COMMISSION DELEGATED REGULATION (EU)No626/2011.

(2) SEER/SCOP values are measured based on FprEN 14825:2016: Testing and rating at part load conditions and calculation of seasonal performance.