
1SET311846R0000 - ACTIVE

ENTRELEC | M8 Connector TE Internal #: 1SET311846R0000 M8 to M12 Cable Assembly, 4 Position, 3 m, Sensor/Actuator, Code A, M8 Socket, M12 Plug, Double Ended, GF Nylon View on TE.com >



Cable Assemblies > Copper Cable Assemblies > M8/M12 Cable Assemblies

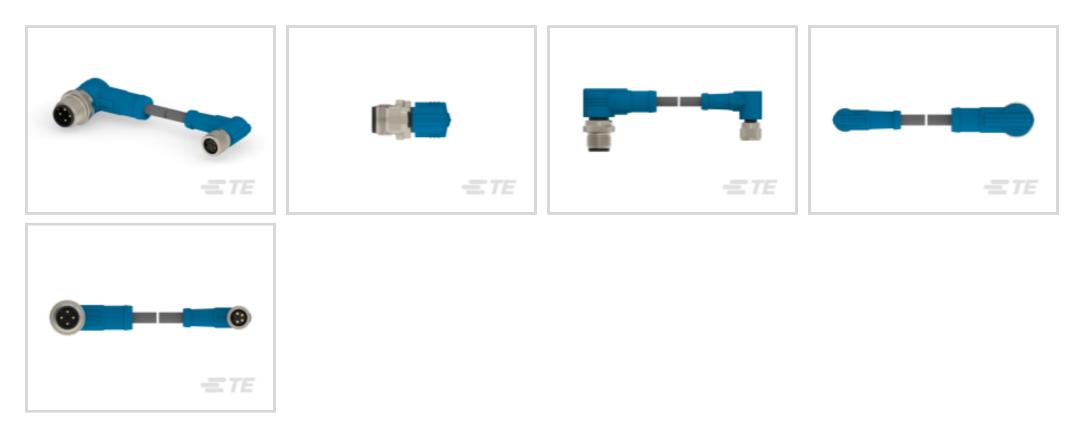

M8/M12 Application Type: Sensor/Actuator

Number of Positions: 4

Keying Code: A

Connector Type (End A): M8 Socket

Connector Type (End B): M12 Plug

Features

Product Type Features

LED	Without
Product Type	Cable Assembly
Cable Type	PUR
Assembly Type	Pigtail
Connector Type (End A)	M8 Socket
Connector Type (End B)	M12 Plug
Cable Assembly Type	M8 to M12
Configuration Features	
Number of Positions	4
Keying Code	A
Electrical Characteristics	
Operating Voltage	30 VDC
Body Features	
Environmental Protection	With

1SET311846R0000

M8 to M12 Cable Assembly, 4 Position, 3 m, Sensor/Actuator, Code A, M8 Socket, M12 Plug, Double Ended, GF Nylon



Conductor Material	Copper Alloy	
Connector Color	Blue	
Wire Color	Brown-White-Blue-Black	
Cable Jacket Color	Gray	
Insulation Material	PUR	
Contact Features		
Contact Current Rating	3 A	
Mechanical Attachment		
Screw & Hole Thread Size	M8 x M12	
Connector Orientation (End A)	Right Angle	
Connector Orientation (End B)	Right Angle	
Housing Features		
Housing Material	GF Nylon	
Dimensions		
Overall Outside Cable Diameter	5 mm	
Wire Size	.25 mm ²	

Usage Conditions

& For support ca	all+1 800 522 6752		02/09/2023 08:57AM Page 2
	EU ELV Directive 2000/53/EC	Compliant with Exemptions	
	EU RoHS Directive 2011/65/EU	Compliant with Exemptions	
	Product Compliance For compliance documentation, visit the product page on TE.com>		
	Cable Assembly Configuration	Double Ended	
	Cable Assembly Length	3 m	
	Field Serviceable	Yes	
	Other		
	Packaging Method	Box	
	Packaging Features		
	Shielded	No	
	M8/M12 Application Type	Sensor/Actuator	
	Operation/Application		
	Operating Temperature Range	-25 – 85 °C[-13 – 185 °F]	

1SET311846R0000

M8 to M12 Cable Assembly, 4 Position, 3 m, Sensor/Actuator, Code A, M8 Socket, M12 Plug, Double Ended, GF Nylon



China RoHS 2 Directive MIIT Order No 32, 2016 Restricted Materials Above Threshold EU REACH Regulation (EC) No. 1907/2006 Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold: Pb (1.9% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. Not Low Halogen - contains Br or Cl > 900 ppm. Solder Process Capability Not reviewed for solder process capability

Product Compliance Disclaimer

Halogen Content

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



Also in the Series M8 Connector



1SET311846R0000

M8 to M12 Cable Assembly, 4 Position, 3 m, Sensor/Actuator, Code A, M8 Socket, M12 Plug, Double Ended, GF Nylon



Documents

Product Drawings M8-FR-4P-M12-MR-PUR-3.0

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_1SET311846R0000_A.2d_dxf.zip English Customer View Model ENG_CVM_CVM_1SET311846R0000_A.3d_igs.zip English Customer View Model

ENG_CVM_CVM_1SET311846R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

Infographic - entrelec ews-linecard

English

Catalog - ENTRELEC-M8-M12-RJ45

English

Product Specifications
Application Specification
English
Application Specification

English