


### ENERGY METER, THREE-PHASE WITH OR WITHOUT NEUTRAL, NON EXPANDABLE, CONNECTION BY CT /5A SECONDARY, 4U, M-BUS INTERFACE, MULTI-MEASUREMENTS




Product designation			Three-phase energy meters	
Product type designation			DMED332	
Туре			Three-phase with and without neutral	
DIN rail module number			4	
Auxiliary supply Us				
Operational frequency				
	min	Hz	50	
	max	Hz	60	
Power consumption	N.4.	) /A	0.5	
De la Parla de Ma	Max	VA	3.5	
Power dissipation Max		W	2.7	
Measuring voltage inputs				
Rated voltage (Ue)	mhaaa mhaaa	\/AC	200 445	
	phase-phase	VAC	380415	
Operating voltage range	phase-neutral	VAC	220240	
Operating voltage range	phase phase	VAC	323456	
	phase-phase phase-neutral	VAC	187264	
Connection method	priase-rieutiai	VAC	Via CT	
Current			VIA CT	
IEC maximum (Imax)		Α	5	
IEC minimum (Imin)		A	0.05	
IEC rated (Iref-lb)		A	5	
IEC start (lst)		mA	0.005	
Transition (Itr)		A	0.25	
Accuracy		,,	0.20	
	Active energy		Class 0.5s (IEC/EN 62053- 22)	
	Reactive energy		Class 2 (IEC/EN 62053-23)	
Output characteristics				
LED Pulse rate	ŗ	pulse/kWh 1000		
LED Pulse duration		ms	30	
Insulations				
Rated insulation voltage Ui IEC/EN		V	250	
Rated impulse withstand voltage Uimp		kV	6	
Operating frequency withstand voltage		kV	4	
Mechanical features				
Housing type			Polyamide	
Terminals type			Fixed	
Conductor cross section	min	mm²	0.2	

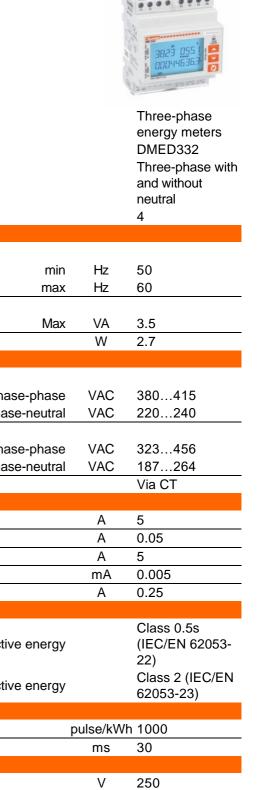

# ENERGY METER, THREE-PHASE WITH OR WITHOUT NEUTRAL, NON EXPANDABLE, CONNECTION BY CT /5A SECONDARY, 4U, M-BUS INTERFACE, MULTI-MEASUREMENTS

		Max	mm²	4 for supply voltage measurement; 2.5 for current measurement
		min	AWG	24
		Max	AWG	12
Tightening torque (Ma	ax)			
			Nm	0.8
			lbin	7
Fixing				Din rail
Weight			g	332
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+55
	Storage temperature			
		min	°C	-25
		max	°C	+70
Relative humidity			%	<80
Maximum Pollution degree				2
Discount of the second				

#### **Dimensions**

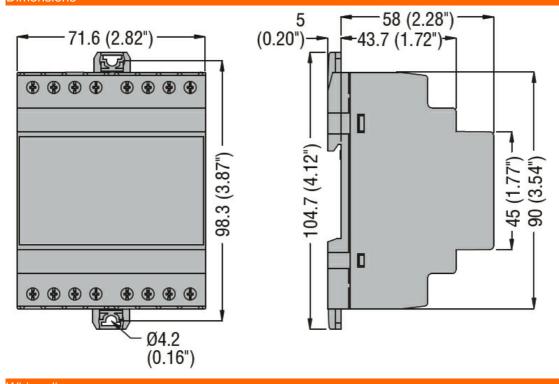



Wiring diagrams




**ENERGY AND AUTOMATION** 


#### ENERGY METER, THREE-PHASE WITH OR WITHOUT NEUTRAL, NON EXPANDABLE, CONNECTION BY CT /5A SECONDARY, 4U, M-BUS INTERFACE, MULTI-MEASUREMENTS








Three-phase without neutral in ARON connection







Pulse output 30VDC 50mA for DME D305 T2



RS485 for DME D330



M-Bus for DME D332



#### Certifications and compliance

Compliance

IEC/EN 50470-1

IEC/EN 61010-1

IEC/EN 61010-2-030

Certificates

**EAC** 

**RCM** 

## ETIM classification

**ETIM 8.0** 

EC001506 -Kilowatt-hour meter

DMED332