


PANDUIT P/N	WEIGHT
P42B42M	5.0kg


NOTES:

- IDENTIFICATION:


UNIT TYPE:	BASIC
ORIENTATION:	VERTICAL, MID
OUTLET QTY&TYPE:	(36)C13, (6)C19
BREAKER QTY&TYPE:	(2) 16A, SINGLE-POLE
INPUT VOLTAGE:	200-240VAC
INPUT CURRENT:	32A
INPUT PHASE:	SINGLE PHASE
RATED POWER:	7.4kVA
INPUT PLUG:	IEC 60309 2P+E 6H 32A
INPUT CORD LENGTH:	3m [10']
- ACCESSORIES:
 - POCKET GUIDE
- RoHS COMPLIANT
- VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- MAXIMUM ALLOWABLE INPUT POWER = 7.4kW
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

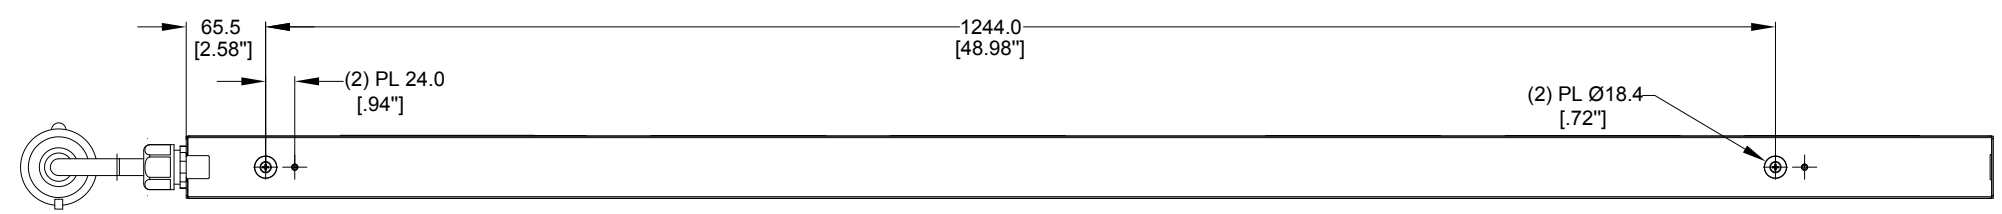

REAR VIEW

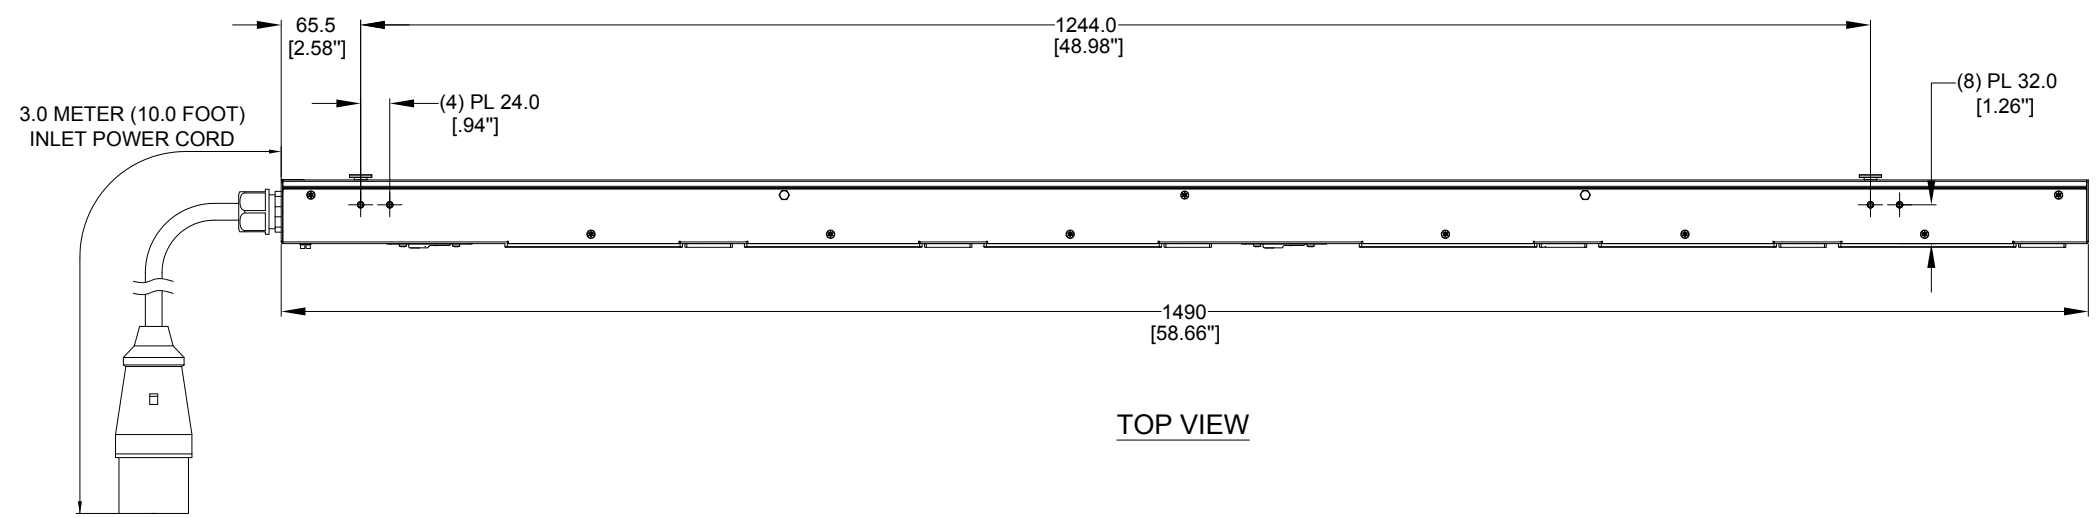


TOP VIEW

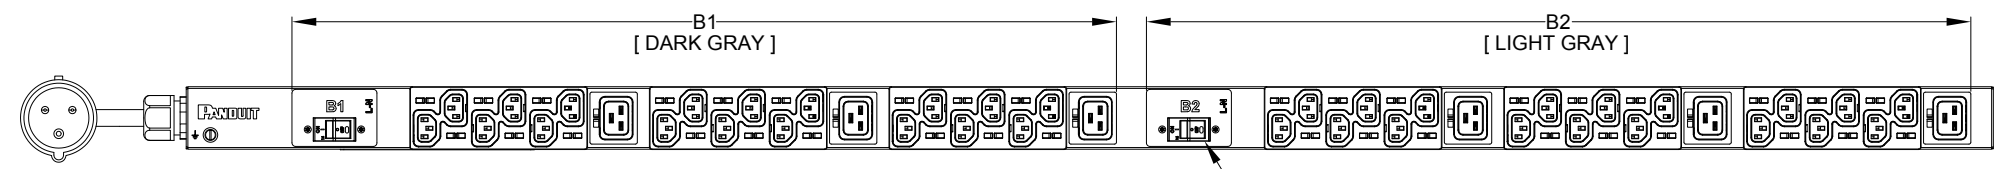

FRONT VIEW

16 A, SINGLE - POLE ELECTRO-MECHANICAL SWITCH / BREAKER (2) PLACES

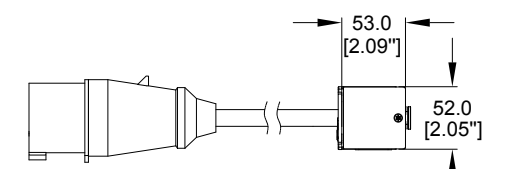

SIDE VIEW

PLUG
32 AMP, 250V
2P/3W
IEC 60309, SPLASHPROOF IP44
6H

SIX (6)
RECEPTACLES
16 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C19

THIRTY-SIX (36)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C13

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01A	06/28/2017	DI.ZHAI	MIM	EDM	INITIAL RELEASE	P42B42M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.

SIGN	
DATE	
PRINT	

TITLE: BASIC SERIES PDU
P42B42M
CUSTOMER DRAWING

ITEM REVISION NAME:

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)	
0-4<200	±0.5
200-4<500	±1.5
500-4<1000	±2.5
1000-4<2000	±4.0

THIRD ANGLE PROJECTION

MATERIAL/COLOR: N/A

DRAWING NUMBER: P42B42M_DC

DRAWN BY	DI.ZHAI	DATE	05/24/2017	CHK	SEAN	SCALE	NONE
----------	---------	------	------------	-----	------	-------	------

SHT 1 OF 1

SCALE: B