

1SET312937R0000 ✓ ACTIVE

ENTRELEC | M12 Connector


TE Internal #: 1SET312937R0000

M12 Pigtail Cable Assembly, 8 Position, 5 m, Sensor/Actuator,  
Code A, M12 Plug, Single Ended, GF Nylon

[View on TE.com >](#)



Cable Assemblies > Copper Cable Assemblies > M8/M12 Cable Assemblies

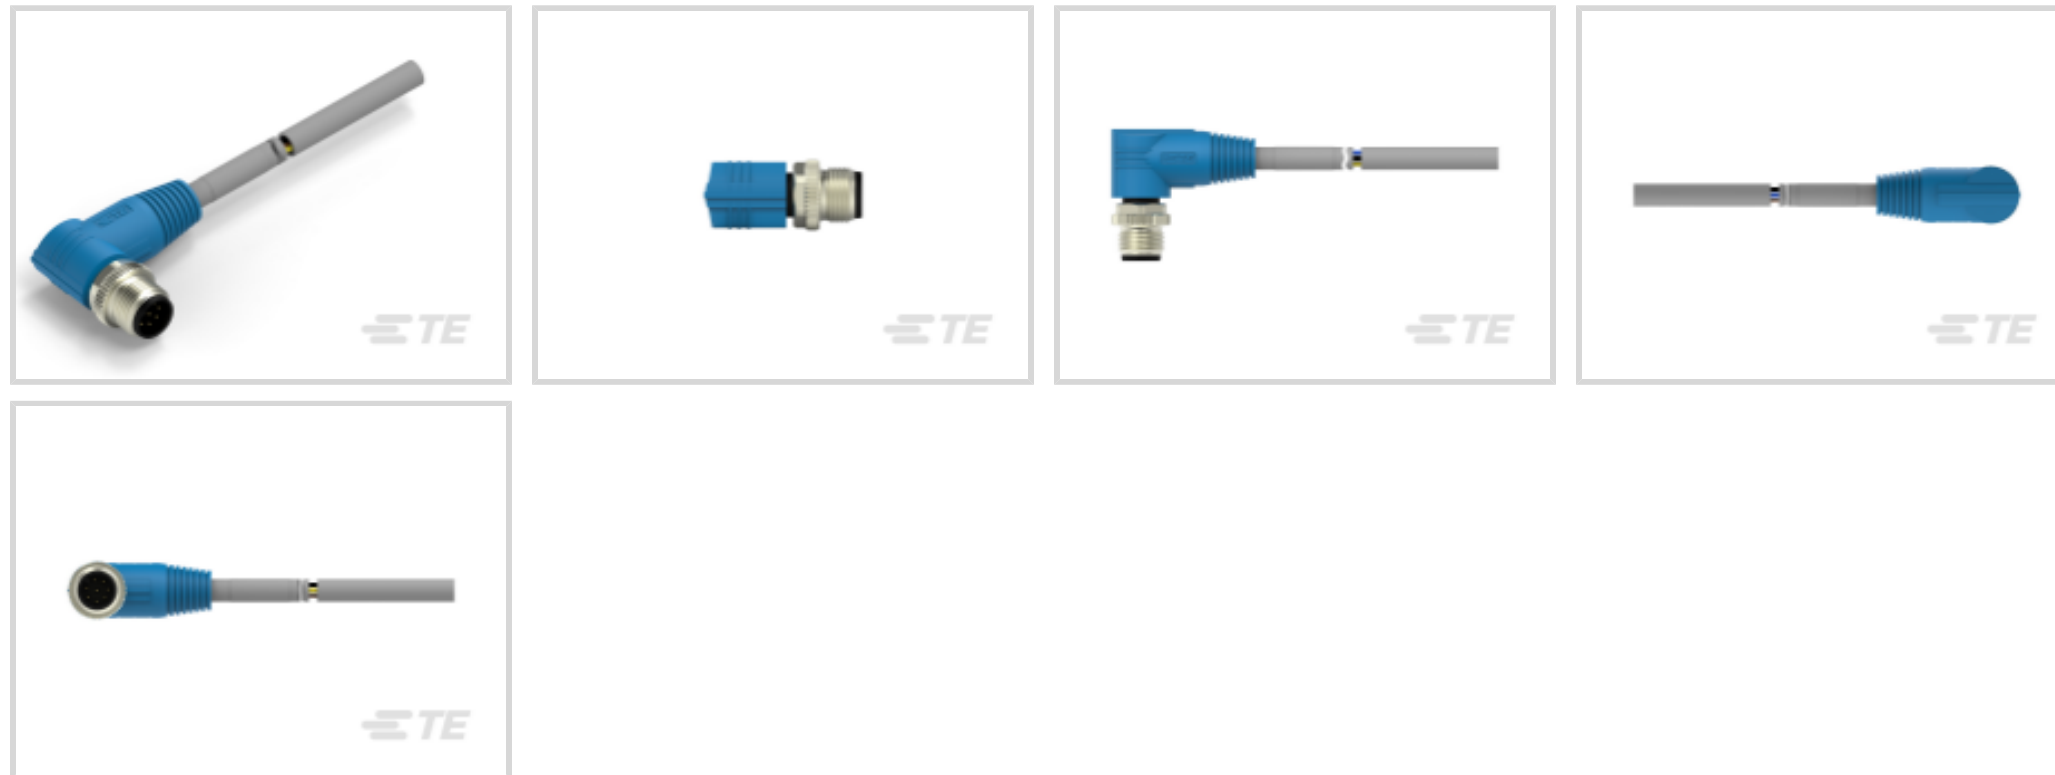

M8/M12 Application Type: **Sensor/Actuator**

Number of Positions: **8**

Keying Code: **A**

Connector Type (End A): **M12 Plug**

Cable Assembly Type: **M12 Pigtail**

## Features

### Product Type Features

LED	Without
Cable Type	PUR
Product Type	Cable Assembly
Assembly Type	Pigtail
Connector Type (End A)	M12 Plug
Cable Assembly Type	M12 Pigtail

### Configuration Features

Number of Positions	8
Keying Code	A

### Electrical Characteristics

Operating Voltage	30 VDC
-------------------	--------

### Body Features

Cable Exit Angle	Right Angle
Cable Jacket Color	Gray



Conductor Material	Copper Alloy
--------------------	--------------

### Mechanical Attachment

Screw & Hole Thread Size	M12
Connector Orientation (End A)	Right Angle

### Housing Features

Housing Material	GF Nylon
------------------	----------

### Operation/Application

M8/M12 Application Type	Sensor/Actuator
Shielded	No

### Other

Cable Assembly Length	5 m
Cable Assembly Configuration	Single Ended

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold: Pb (4% in Component Part) <b>Article Safe Usage Statements:</b> Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides

on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



## Also in the Series | M12 Connector

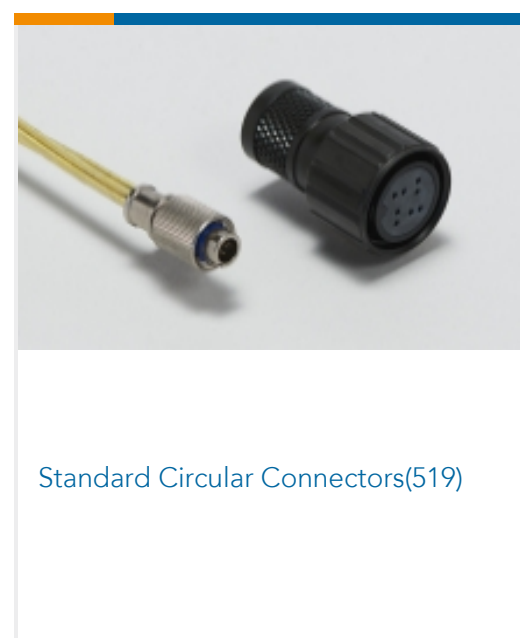

## Documents

### Product Drawings

M12-MR-8P-PUR-5.0

English

### CAD Files

3D PDF

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_1SET312937R0000\\_A.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1SET312937R0000\\_A.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1SET312937R0000\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

[Infographic - entrelec ews-linecard](#)

1SET312937R0000

M12 Pigtail Cable Assembly, 8 Position, 5 m, Sensor/Actuator, Code A, M12 Plug,  
Single Ended, GF Nylon



English

[Catalog - ENTRELEC-M8-M12-RJ45](#)

English

---

[Product Specifications](#)

[Application Specification](#)

English