

# CC COMPACT DIP SWITCH



## EASYLINE DIP SWITCH C-R1

**187116, 187117, 187119, 187279**

### Typical Applications

Built-in in compact luminaires for

- Shop lighting
- Office lighting
- Residential lighting
- Downlights

### EasyLine DIP switch C-R1

- **SELECTABLE OUTPUT CURRENT VIA DIP SWITCH**
- **VERY LOW RIPPLE CURRENT: < 1%**
- **SELV**
- **LONG SERVICE LIFE: UP TO 100.000 HRS.**
- **PRODUCT GUARANTEE: 5 YEARS**



## EasyLine DIP switch C-R1

### Product features

- Compact casing shape

### Functions

- Selectable current output by dip-switch

### Electrical features

- Mains voltage: 220–240 V  $\pm 10\%$
- Mains frequency: 50–60 Hz
- Push-in terminals:  
rigid 0.5–1.5 mm<sup>2</sup>  
strand 0.75–1.5 mm<sup>2</sup>
- Power factor at full load: > 0.95
- Open circuit voltage (U<sub>max.</sub>): 60 V
- Secondary side switching of LED modules is not allowed.

### Safety features


- Protection against transient main peaks up to 1 kV (between L and N)
- Electronic short-circuit protection
- Overload protection
- Degree of protection: IP20
- Protection class II
- SELV

### Packaging units

Ref. No.	Packaging unit		
	Pieces per box	Boxes per pallet	Weight g
187116	40	90	100
187117	40	90	100
187119	40	90	100
187279	40	90	115

### Product guarantee

- 5 years  
for operation at recommended operation temperature (see table for expected service life time on the next page)
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage ([www.vossloh-schwabe.com](http://www.vossloh-schwabe.com)). We will be happy to send you these conditions upon request.

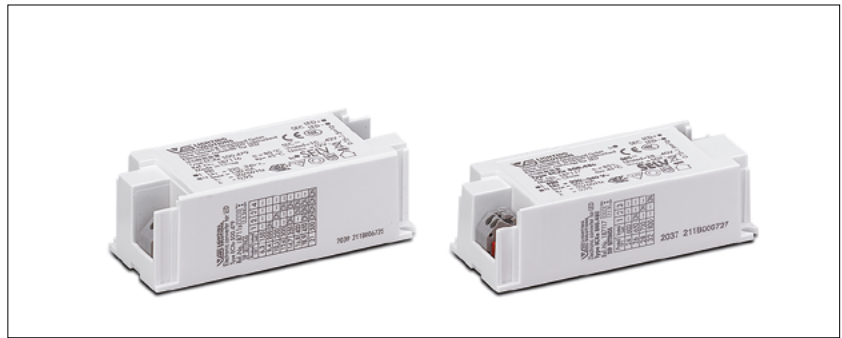


### Dimensions

Ref. No.	Casing	Length mm	Width mm	Height mm
187116	K86	97	43	30
187117, 187119, 187279	K87	97	43	26


### Applied standards

- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2/EN 61000-3-3
- EN 62384
- EN 55015
- EN 61000-4-2/EN 61000-4-5

### K86



### K87



### Cord grip for K86


Available for independent operation  
Available separately  
2 cord grips per LED driver required  
Packaging unit: 2 pcs.

**Ref. No.: 187203**

### Cord grip for K87

Available for independent operation  
Available separately  
2 cord grips per LED driver required  
Packaging unit: 2 pcs.

**Ref. No.: 187204**



The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

# LED Drivers – EasyLine DIP switch C-R1

## Electrical characteristics

Max. output W	Type	Ref. No.	Voltage 50–60 Hz V	Mains current mA	Inrush current A / $\mu$ s	Current output DC mA ( $\pm$ 5%)	Voltage output DC [V]	THD at full load % (230 V)	Efficiency at full load % (230 V)	Ripple 100 Hz %
21	ECXe 500.479	<b>187116</b>	220–240	152–96	10 / 200	150–500	10–42	< 5	89	< 1
32	ECXe 800.480	<b>187117</b>	220–240	260–198	30 / 200	600–800	28–40	< 6	93	< 1
40	ECXe 800.600	<b>187279</b>	220–240	215–195	16 / 230	500–800	35–50	< 16	89	< 1
42	ECXe 1050.482	<b>187119</b>	220–240	320–240	30 / 200	850–1050	28–40	< 6	90	< 1

## Maximum ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the drivers.

Ref. No.	Ambient temperature range		Operation humidity range		Storage temperature range		Storage humidity range		Max. operation temperature at $t_c$ point °C	Degree of protection
	°C min.	°C max.	% min.	% max.	°C min.	°C max.	% min.	% max.		
187116	-20	+45	20	90	-25	+60	20	90	+80	IP20
187117, 187119					-40	+80			+85	
187279					-25	+60			+85	


## Expected service life time

at operation temperatures at  $t_c$  point

Operation current	Ref. No. 187116			187117, 186119			187279	
	65 °C*	70 °C	80 °C	65 °C*	75 °C	85 °C	75 °C*	85 °C
hrs.	100,000	88,000	44,000	100,000	60,000	30,000	100,000	50,000

\* recommended operation temperature

## Product labels

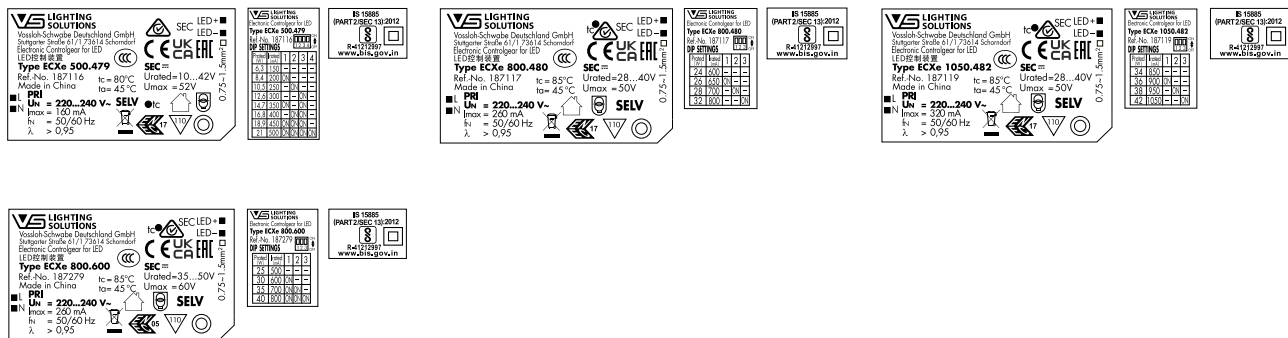

## DIP switch settings

187116 / ECXe 500.479						
Pin	1	2	3	4	Output W	Current mA
Factory settings [mA]	500	200	250	300	350	400
OFF	OFF	OFF	OFF	OFF	6.3	150
ON	OFF	OFF	OFF	OFF	8.4	200
OFF	ON	OFF	OFF	OFF	10.5	250
OFF	OFF	ON	OFF	OFF	12.6	300
ON	OFF	ON	OFF	OFF	14.7	350
OFF	ON	ON	OFF	OFF	16.8	400
ON	ON	ON	OFF	OFF	18.9	450
ON	ON	ON	ON	OFF	21	500

187117 / ECXe 800.480					
Pin	1	2	3	Output W	Current mA
Factory settings [mA]	800	650	700	800	
OFF	OFF	OFF	OFF	24	600
ON	OFF	OFF	OFF	26	650
OFF	ON	OFF	OFF	28	700
OFF	OFF	ON	OFF	32	800


187279 / ECXe 800.600					
Pin	1	2	3	Leistung W	Strom mA
Werkseinstellung [mA]	800	700	800		
OFF	OFF	OFF	OFF	25	500
ON	OFF	OFF	OFF	30	600
ON	ON	OFF	OFF	35	700
ON	ON	ON	OFF	40	800

187119 / ECXe 1050.482					
Pin	1	2	3	Output W	Current mA
Factory settings [mA]	1050	950	1050		
OFF	OFF	OFF	OFF	34	850
ON	OFF	OFF	OFF	36	900
OFF	ON	OFF	OFF	38	950
OFF	OFF	ON	OFF	42	1050


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

## Typ. performance graphs for 187116 / Type ECXe 500.479


### Working area

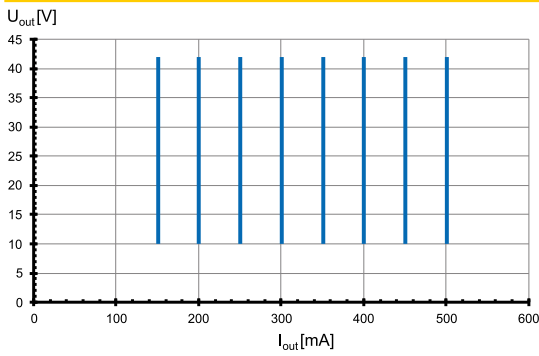


### Efficiency

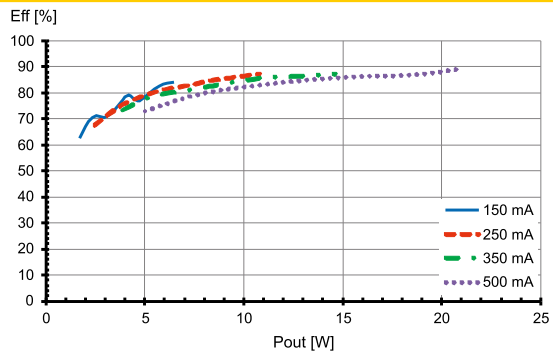

### Power factor

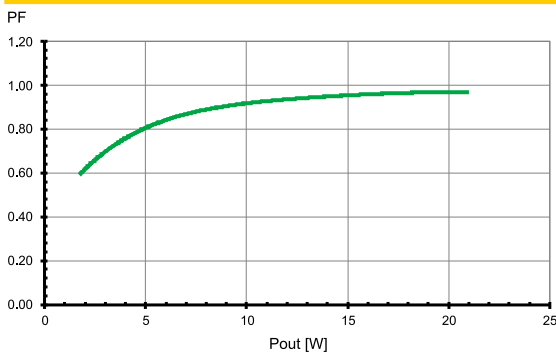


### Total harmonic factor (THD)

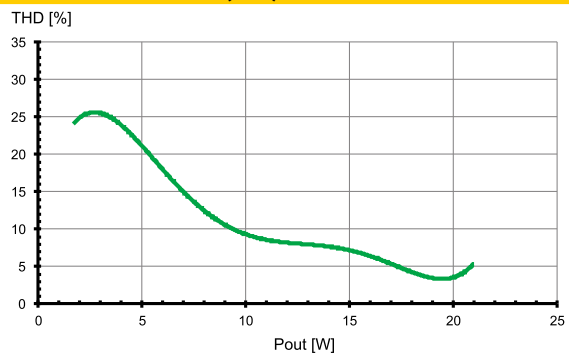


## Typ. performance graphs for 187117 / Type ECXe 800.480


### Working area

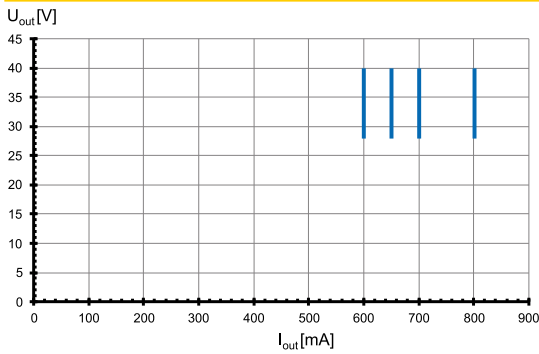


### Efficiency

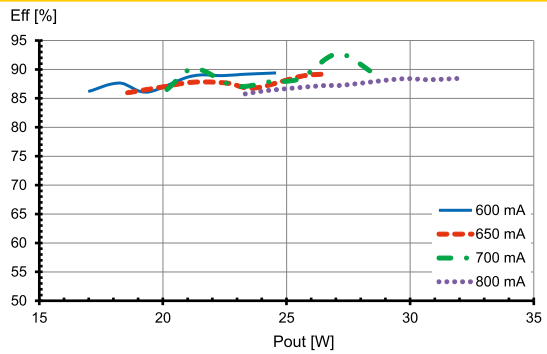

### Power factor

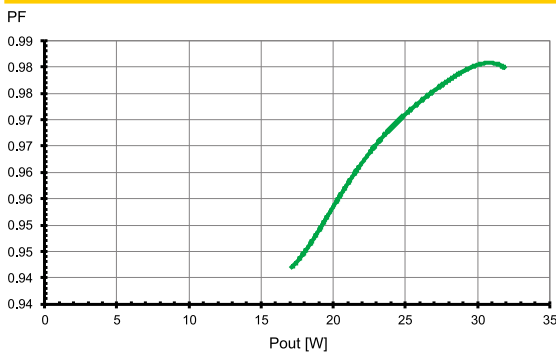


### Total harmonic factor (THD)

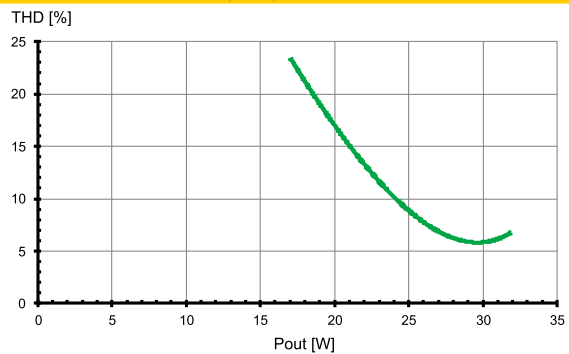


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

## Typ. performance graphs for 187119 / Type ECXe 1050.482


### Working area

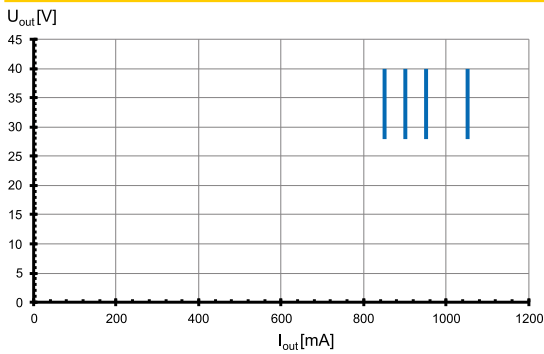


### Efficiency

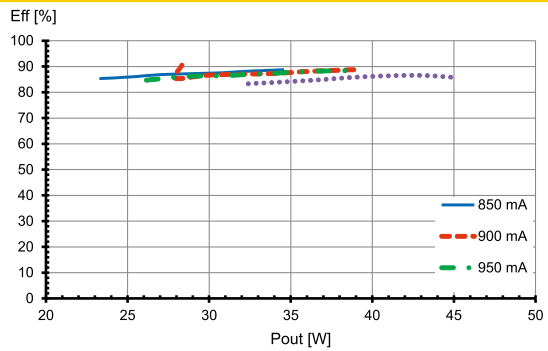

### Power factor

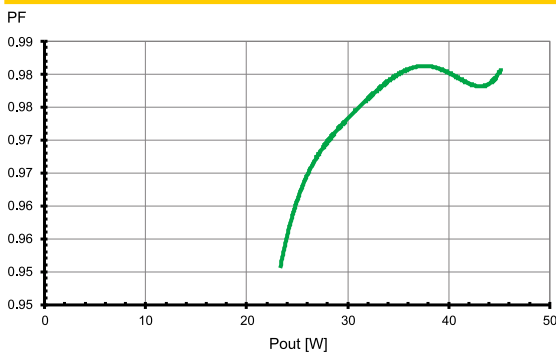


### Total harmonic factor (THD)

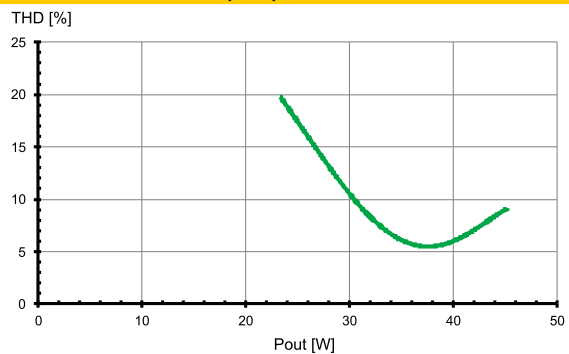


## Typ. performance graphs for 187279 / Type ECXe 800.600


### Working area

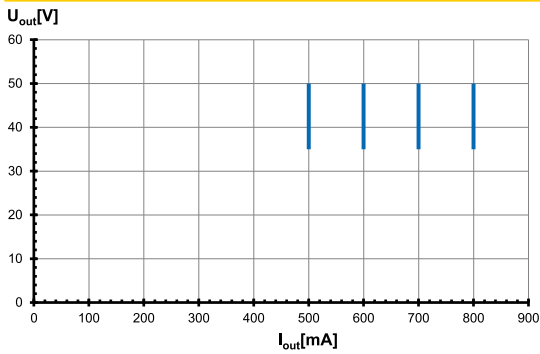


### Efficiency

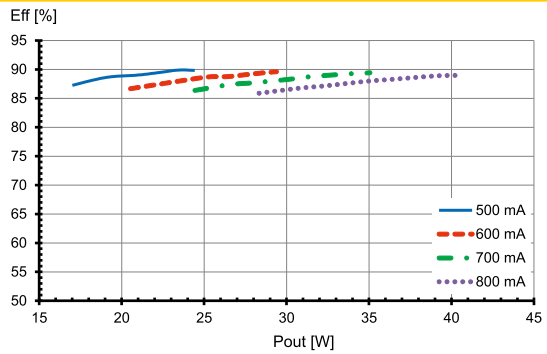

### Power factor

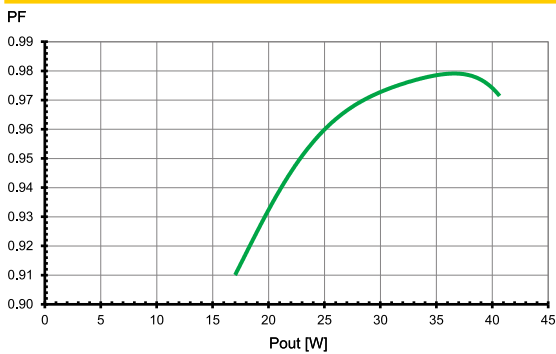

### Total harmonic factor (THD)

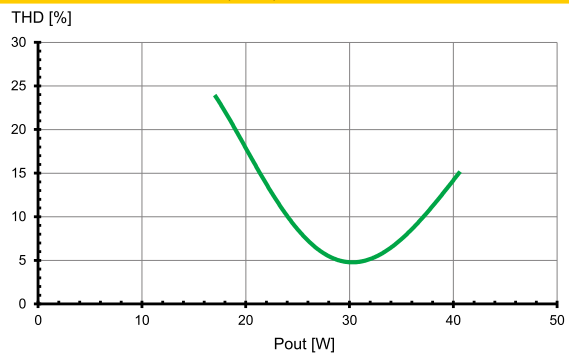

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

## Safety functions

- Transient mains peaks protection:  
Values are in compliance with EN 61547  
(interference immunity).  
Surges between L-N: up to 1 kV
- Short-circuit protection: The control gear is protected against permanent short-circuit with automatic restart function.
- Overload protection: The control gear only works in range of rated output power and voltage problemfree (< 60 V DC).  
Please check before switch-on mains power supply that the selected LED load is suitable (see Electrical Characteristics on data sheet).
- Overheating: The control gear has overheating protection. In case of overheating the output current of the control gear will be reduced. After the temperature will drop below the critical temperature value, the output current rises again to the previously set value.
- No load operation: The control gear is protected against no load operation (open load).
- If any of the above mentioned safety functions will be triggered, disconnect the control gear from the power supply then find and eliminate the cause of the problem.

## Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advices must be observed; non-observance can result in the destruction of the LED drivers, fire and/or other hazards.

### Mandatory regulations

- DIN VDE 0100
- EN 60598-1


### Mechanical mounting

- Mounting position: Built-in: Any position inside a luminaire is allowed  
Independent application: Drivers are allowed to use for independent applications with separate cord grip (Ref. No.: 187203 for K86 or 187204 for K87).
- Mounting location: LED drivers are designed for integration into luminaires or comparable devices.  
Independent LED drivers do not need to be integrated into a casing.  
Installation in outdoor luminaires: degree of protection for luminaire with water protection rate  $\geq 4$  (e.g. IP54 required).
- Degree of protection: IP20
- Clearance: Min. 0.10 m from walls, ceilings and insulation
- Surface: Solid and plane surface for optimum heat dissipation required.
- Heat transfer: If the driver is destined for installation in a luminaire, sufficient heat transfer must be ensured between the driver and the luminaire casing.  
LED drivers should be mounted with the greatest possible clearance to heat sources.  
During operation, the temperature measure at the driver's  $t_c$  point must not exceed the specified maximum value.
- Fastening: Using M4 screws in the designated holes
- Tightening torque: 0.2 Nm

### Electrical installation

- Connection terminals: Push-in terminals for rigid or flexible conductors with a section of rigid 0.5–1.5 mm<sup>2</sup> strand 0.75–1.5 mm<sup>2</sup>
- Stripped length: 7–8 mm
- Wiring: The mains conductor within the luminaire must be kept short (to reduce the induction of interference).  
Mains and lamp conductors must be kept separate and if possible should not be laid in parallel to one another.  
Max. secondary side lead length: 2 m

- Polarity: Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- Through-wiring: Is not allowed.
- Secondary load: The sum of forward voltages of LED loads is within the tolerances which are mentioned in the Electrical Characteristics on the data sheet.
- Parallel wiring: Parallel connection of LED loads is not allowed.
- Wiring diagram:



### Selection of automatic cut-outs for VS LED drivers

- Dimensioning automatic cut-outs  
High transient currents occur when an LED driver is switched on because the capacitors have to load. Ignition of LED modules occurs almost simultaneously. This also causes a simultaneous high demand for power. These high currents when the system is switched on put a strain on the automatic conductor cut-outs, which must be selected and dimensioned to suit.
- Release reaction  
The release reaction of the automatic conductor cut-outs comply with VDE 0641 part 11 for B characteristics. The values shown in the following tables are for guidance purposes only and are subject to system-dependent change.
- No. of LED drivers  
The maximum number of VS LED drivers applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible drivers must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 mΩ (approx. 20 m [2.5 mm<sup>2</sup>] of conductor from the power supply to the distributor and a further 15 m to the luminaire).

Type	Ref. No.	Automatic cut-out type and possible no. of VS drivers pcs.					
Automatic cut-out type		B 10 A	B 13 A	B 16 A	C 10 A	C 13 A	C 16 A
ECXe 500.479	<b>187116</b>	30	38	45	38	47	57
ECXe 800.480	<b>187117</b>	22	27	32	27	34	41
ECXe 800.600	<b>187279</b>	23	30	36	38	50	61
ECXe 1050.482	<b>187119</b>	16	20	24	20	25	30

- To limit capacitive inrush currents the current carrying capacity of each circuit breaker (fuse) can be increased by a factor of 2.5 with the help of our ESB (Ref. No.: 149820, 149821, 149822) inrush current limiters.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.