


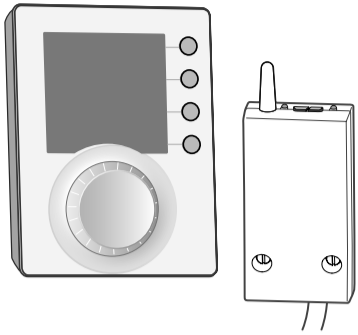
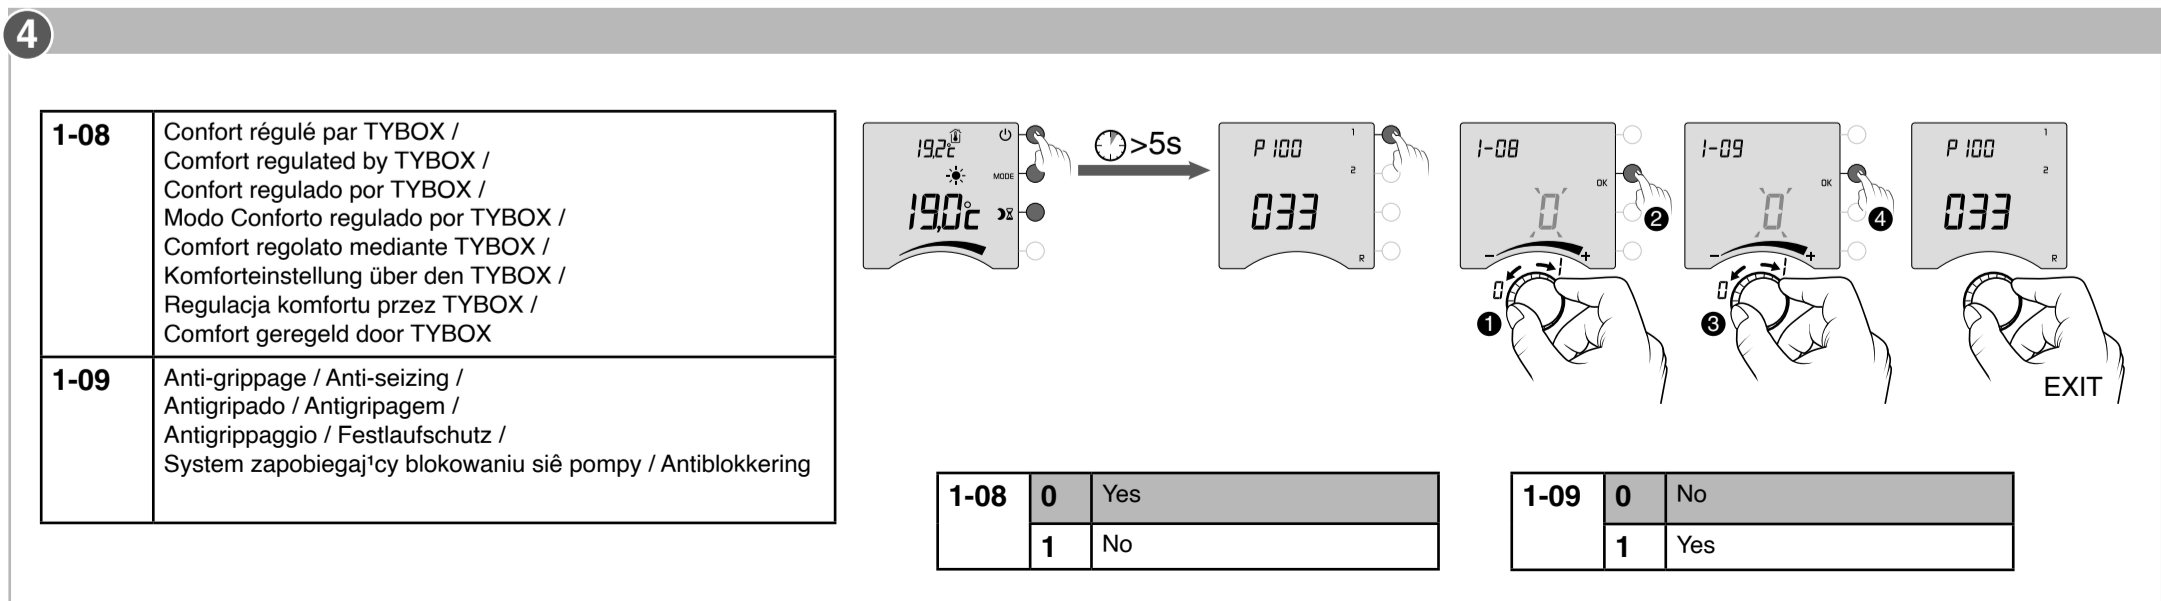
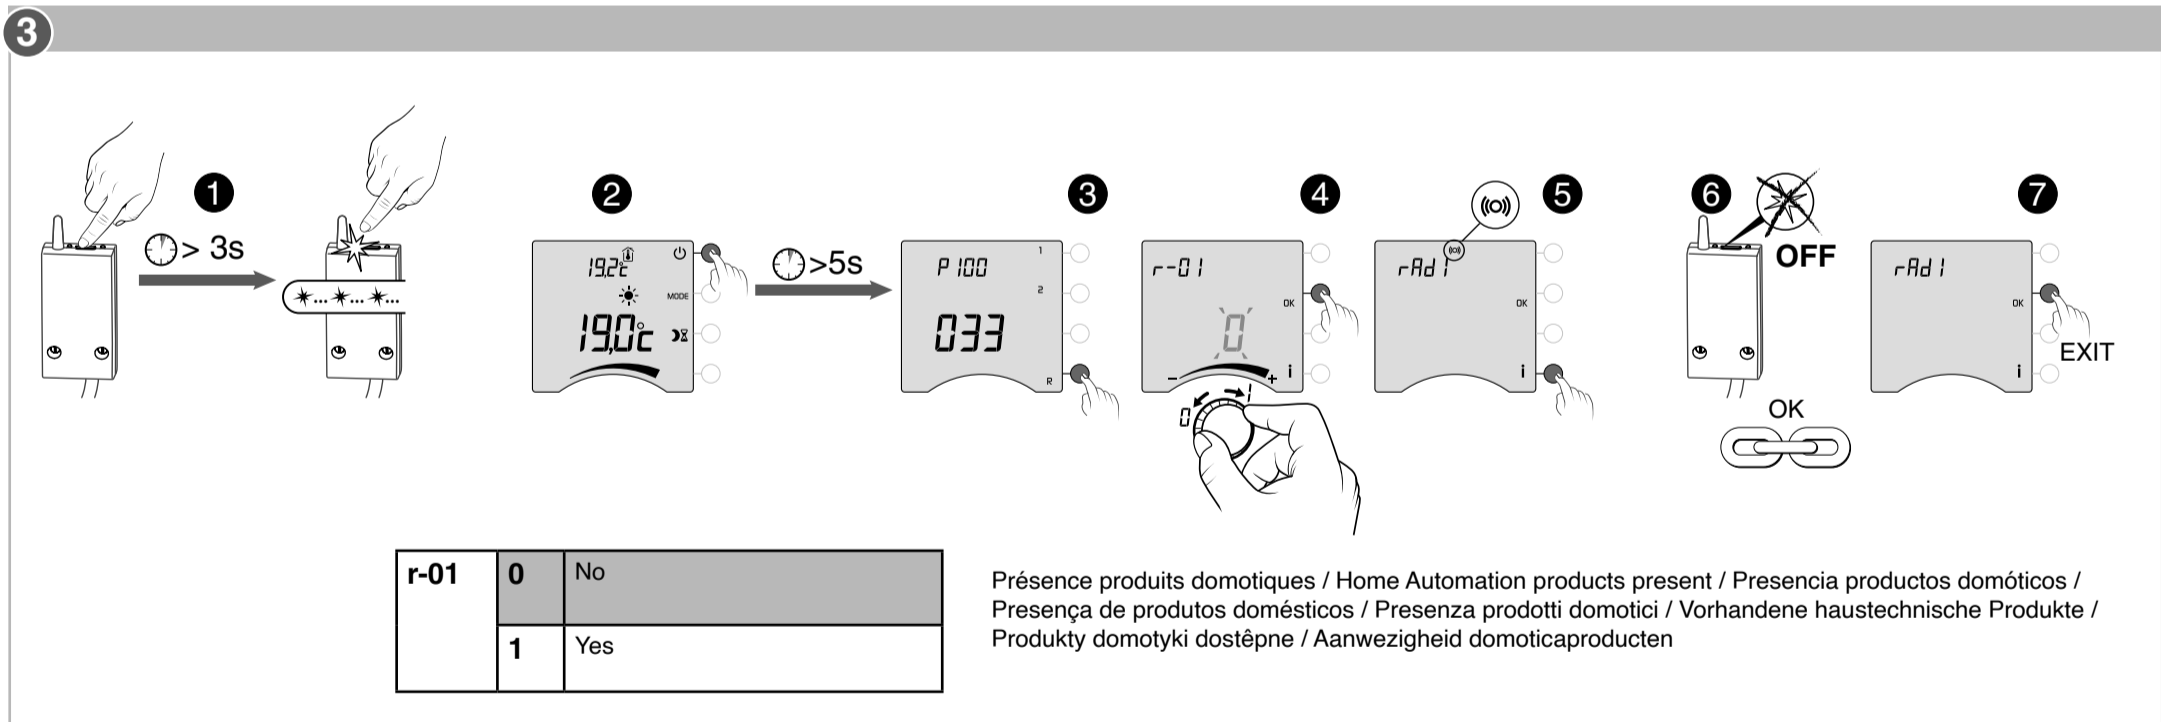


TYBOX 33

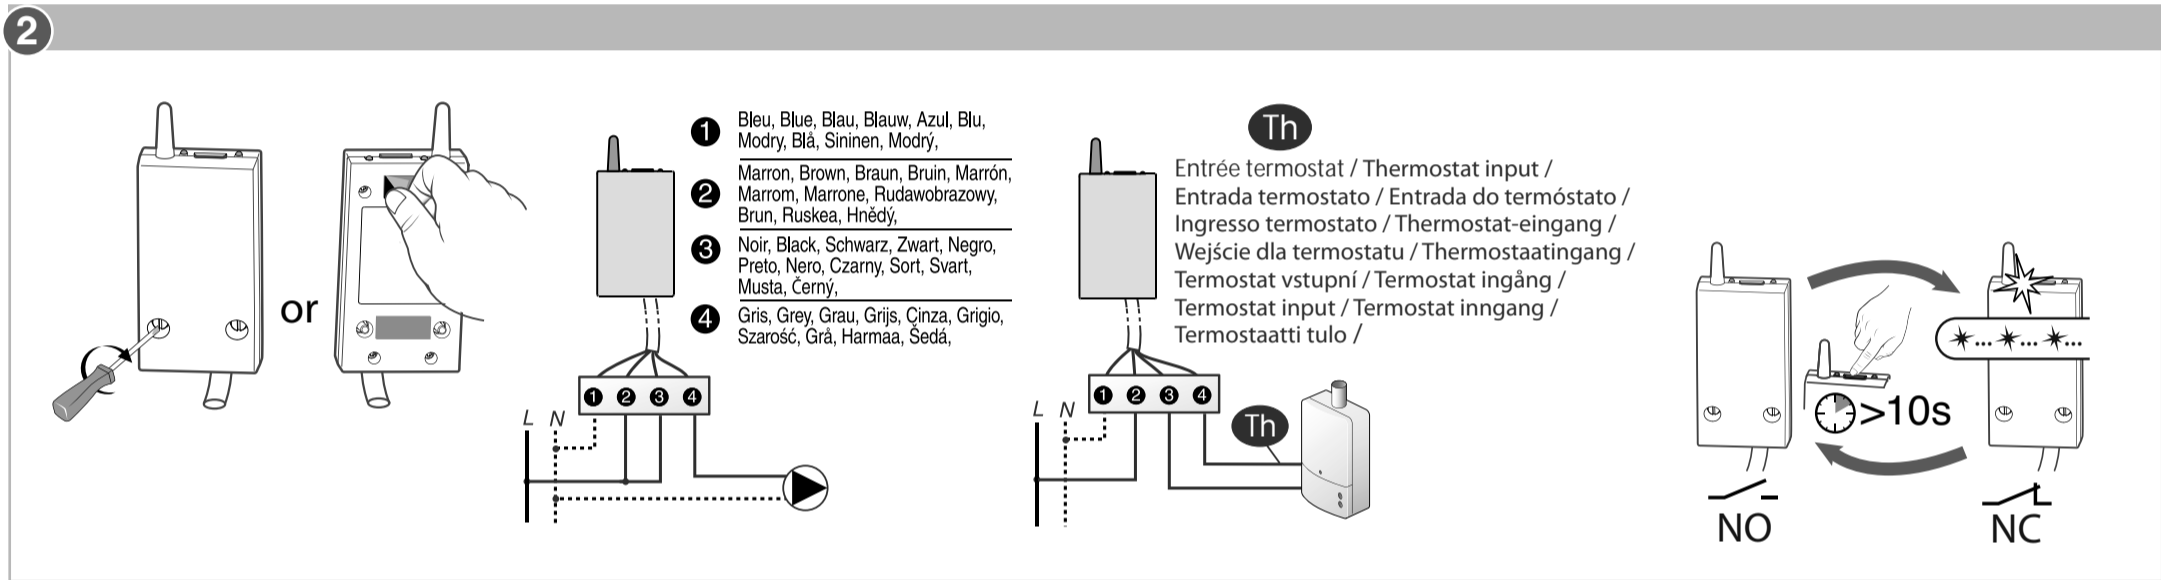


www.deltadore.com

	230 V~, 50 Hz - 0,5 VA
	54 x 12 x 20 mm
IP	IP 30 - Vo
	2 A max., 230V~ (type 1.C)
	2 x 1,5V - AAA LR03
	80 x 103 x 25 mm
	868 → 868,6 MHz 100 → 300 m
Maximum radio power < 10 mW, receiver category: 2	
	8 max.
	-5°C / +40°C
Important product information (2 4)	

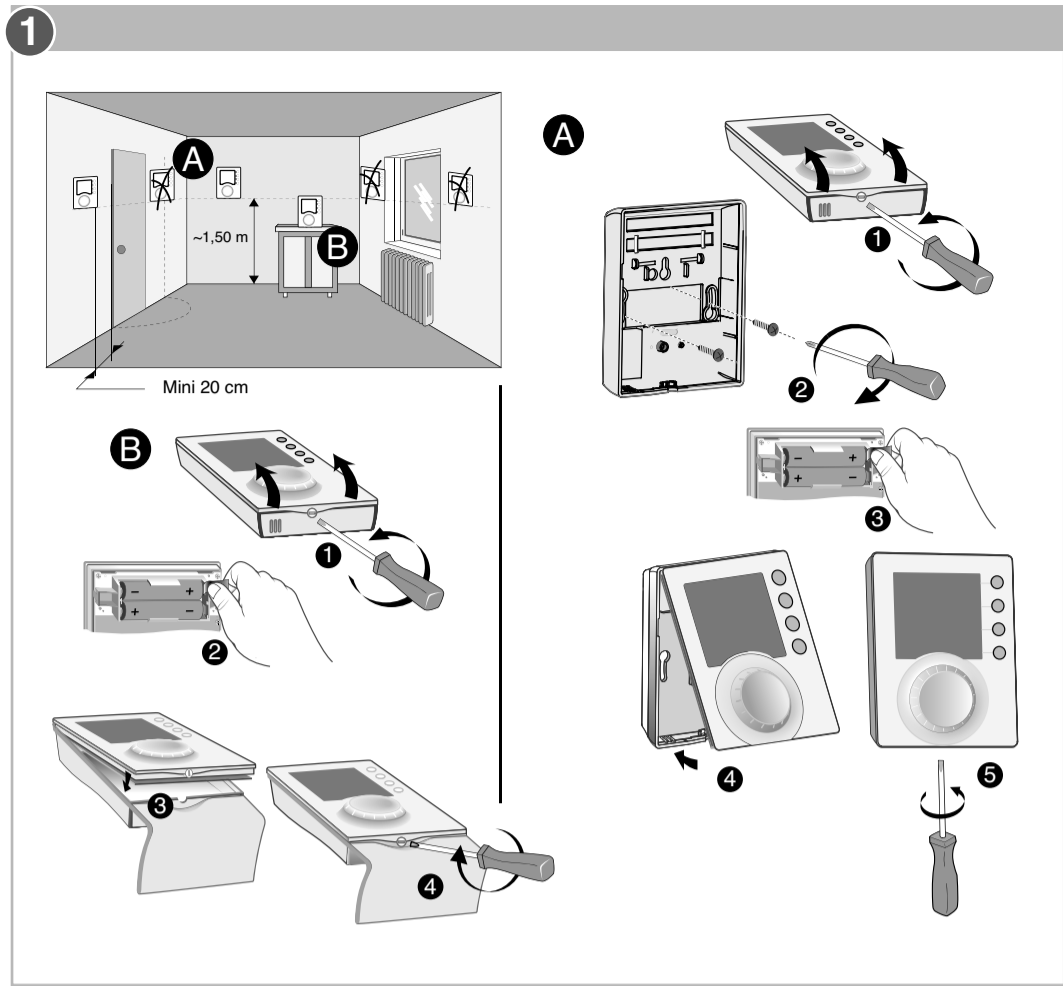

4


2-01	Limitation consignes / Settings limitation / Limitación consignas / Limitação de recomendações / Limitazione valori di riferimento / Begrenzung der Sollwerte / Ograniczenie wartości zadane / Beperking ingestelde temperatuur /
2-02	Correction température mesurée / Measured temperature correction / Corrección temperatura medida / Correção da temperatura medida / Correzione temperatura misurata / Korrektur der gemessenen Temperatur / Korekta zmierzonych temperatury / Aanpassen gemeten temperatuur
2-08	Base de temps de régulation / Regulation time base / Base de tiempos de regulación / Base de tempo de regulação / Base di tempo di regolazione / Zeitbasis für die Einstellung / Podstawa czasu regulacji / Basis voor instellingstijd

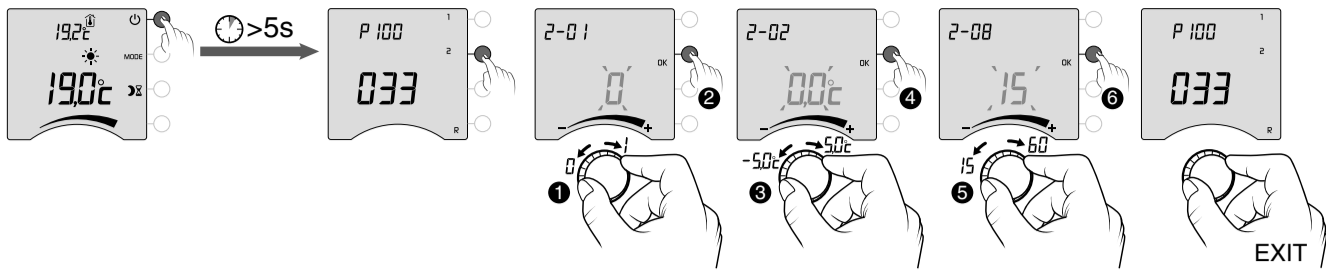

2-01	0	 : 5°C < > 30°C : 5°C < > 15°C
	1	 - 3°C < > + 3°C
2-02		- 5°C < > + 5°C


2-08	15	Minutes
	30	Minutes
	45	Minutes
	60	Minutes

5 Reset

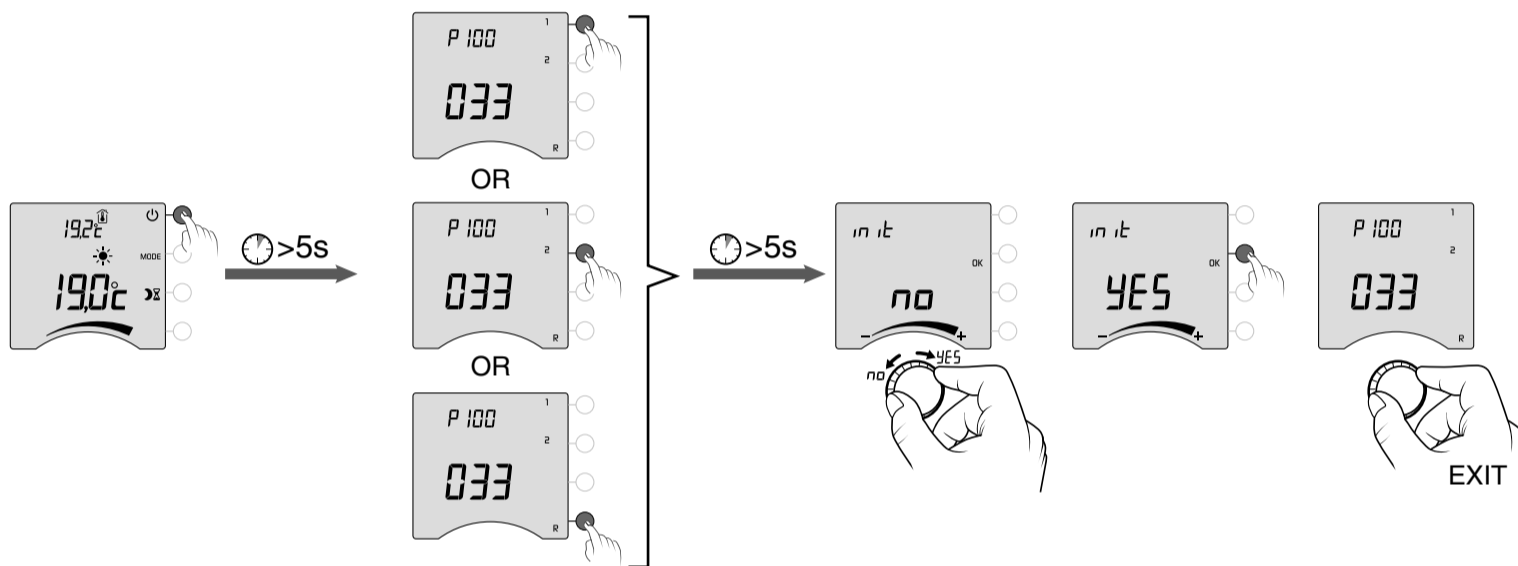


6

MODE

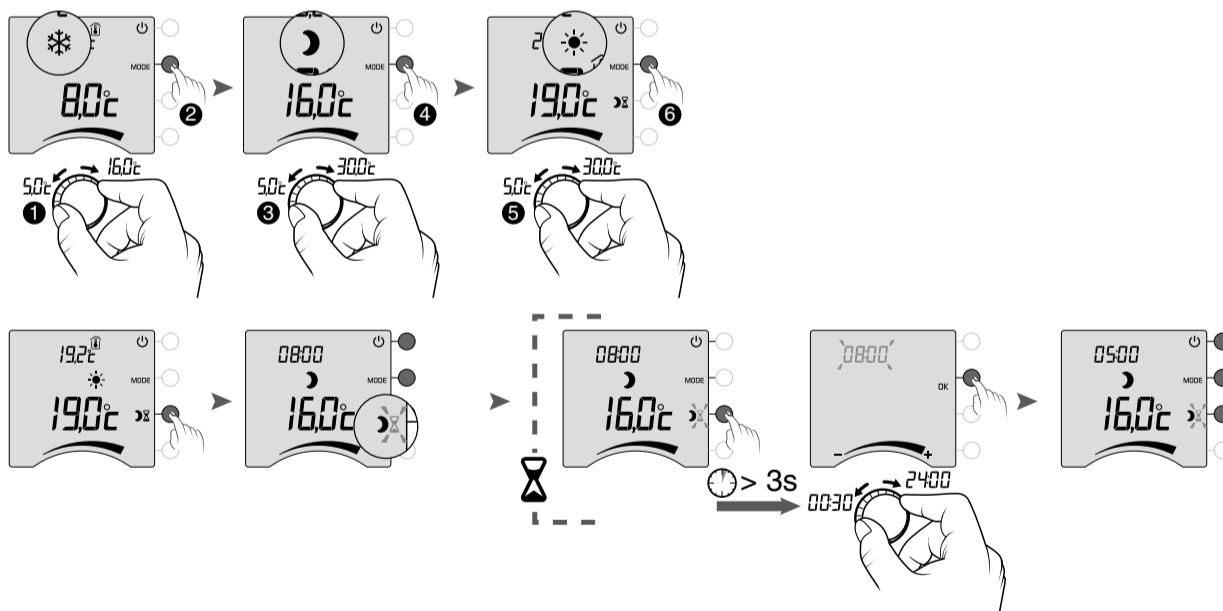

7

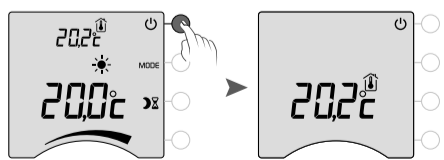

8

