



LLTE-A2030111040E4

LLX

FIBERS

SICK
Sensor Intelligence.



Illustration may differ

Ordering information

Type	Part no.
LLTE-A2030111040E4	2124207

Included in delivery: LLAC-AB10 (1), LLAC-AB13 (1), LLAC-FC (1)

Other models and accessories → www.sick.com/LLX

Detailed technical data

Features

Device type	Fibers
Functional principle	Proximity system
Smooth sleeve diameter (housing)	3 mm
Fiber-optic cable cuttable	✓
Special features	Coaxial fiber arrangement
Adapter sleeves required	Yes (1 x LLAC-AB10 / 1 x LLAC-AB13)
Items supplied	1 x fiber cutter (LLAC-FC), 2 x fiber adapter bushing (1 x LLAC-AB10 + 1 x LLAC-AB13)

Mechanical data

Housing	Cylindrical smooth sleeve
Design detail	Axial
Connection detail	
Cable diameter	1 x 1.0 mm (sender) / 1 x 1.3 mm (receiver)
Length of cable (L)	4 m
Bending radius	15 mm
Material	
Housing	Stainless steel, Stainless steel V2A (1.4301)
Cable	Plastic PE
Fibers	Plastic, PMMA
Fiber diameter (and quantity of fibers)	1 x 0.5 mm (sender) / 9 x 0.25 mm (receiver)

Ambient data

Ambient operating temperature	-40 °C ... +60 °C
RoHS certificate	✓

Classifications

ECLASS 5.0	27270905
ECLASS 5.1.4	27270905
ECLASS 6.0	27270905
ECLASS 6.2	27270905
ECLASS 7.0	27270905

ECLASS 8.0	27270905
ECLASS 8.1	27270905
ECLASS 9.0	27270905
ECLASS 10.0	27270905
ECLASS 11.0	27270905
ECLASS 12.0	27270905
ETIM 5.0	EC002651
ETIM 6.0	EC002651
ETIM 7.0	EC002651
ETIM 8.0	EC002651
UNSPSC 16.0901	39121528

Sensing ranges with WLL180T

Operating mode 16 μs	26 mm
Operating mode 70 μs	75 mm
Operating mode 250 μs	120 mm
Operating mode 2 ms	216 mm
Operating mode 8 ms	324 mm


Sensing ranges with GLL170

Operating mode 250 μs	30 mm
------------------------------	-------

Sensing ranges with GLL170T

Operating mode 50 μs	51 mm
Operating mode 250 μs	80 mm

Dimensional drawing (Dimensions in mm (inch))

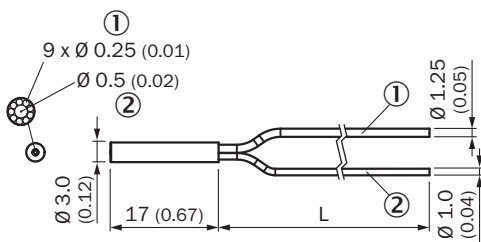




For length of cable (L), see technical data

- ① Receiver
- ② Sender

Recommended accessories

Other models and accessories → www.sick.com/LLX

	Brief description	Type	Part no.
Other adapters			
	Adapter sleeve for Ø 1.0 mm LLX fibers for adaptation to Ø 2.2 mm, in LLX scope of delivery	LLAC-AB10	2119446
	Adapter sleeve for Ø 1.3 mm LLX fibers for adaptation to Ø 2.2 mm, in LLX scope of delivery	LLAC-AB13	2119447
	Fiber cutting tool, in LLX scope of delivery	LLAC-FC	2119448

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com