





Signal tower

Product designation			Ø70mm/2.75"
Product type designation			8TL7FL - Light mudules
General characteristics			
Diameter	I	mm - inch	70 / 2.75
Supply voltage (AC)		V	230240
Colour			Yellow
IEC degree of protection			IP65
Light consumption per module (AC)		mA	15
Light consumption per module (DC)		mA	15
Sound module consumption (AC)		mA	15
Sound module consumption (DC)		mA	15
Mechanical features			
Weight		g	92
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-20
	max	°C	+50


Dimensions







Wiring diagrams

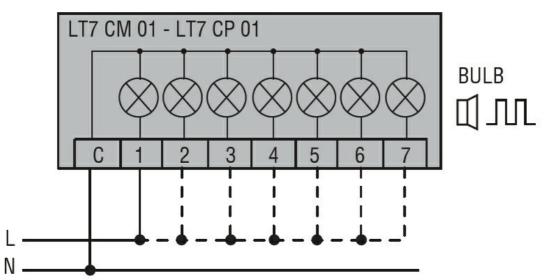

Connect terminals C and 1 as indicated to power the first module. If other modules are fitted, the respective terminals must be connected accordingly.

Certifications and compliance Compliance

CSA C22.2 n° 14

8LT7FLM5



	IEC/EN 60947-1	
	IEC/EN 60947-5-1	
	UL508	
Certificates		
	cULus	
	EAC	
ETIM classificatio	n .	
		EC000232 -
		Ontion module

ETIM 8.0

Optical module for signal tower