



GREY CONTROL STATION LPZP3A8 COMPLETE WITH GREEN FLUSH PUSHBUTTON "I" LPCB1113 1NO, RED FLUSH PUSHBUTTON "O" LPCB1104 1NC AND GREEN FLUSH PUSHBUTTON "II" LPCB1123 1NO



Grey control station LPZP3A8 complete with green flush pushbutton "i" LPCB1113 1NO, red flush pushbutton "o" LPCB1104 1NC and green flush pushbutton "ii" LPCB1123 1NO LPZP3B8902

Grey

Polycarbonate
IP66, IP67,

Product type designation

Product designation

General Characteristics	
Colour	Grey
Material	Polycarbonate
IEC degree of protection	IP66, IP67, IP69K

Ambient conditions

Temperature

Operating temperature

	min	°C	-25	
	max	°C	+70	
Storage temperature				
	min	°C	-40	
	max	°C	+85	


Dimensions

1/2



ENERGY AND AUTOMATION

GREY CONTROL STATION LPZP3A8 COMPLETE WITH GREEN FLUSH PUSHBUTTON "I" LPCB1113 1NO, RED FLUSH PUSHBUTTON "O" LPCB1104 1NC AND GREEN FLUSH PUSHBUTTON "II" LPCB1123 1NO

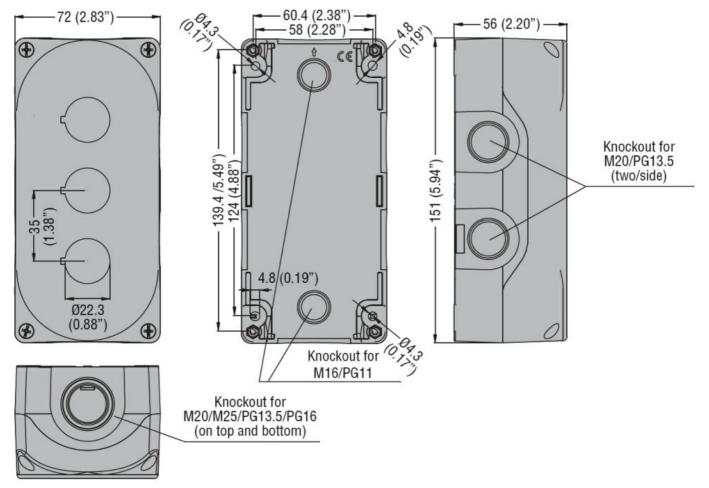

Certifications and compliance

Certificates

cULus

ETIM classification

ETIM 8.0

EC000225 -Control circuit devices combination in enclosure