# 1SET314409R0000 ACTIVE

#### ENTRELEC | M12 Connector

TE Internal #: 1SET314409R0000

M12 Cable Assembly, 5 Position, 1 m, Sensor/Actuator, Code A,

M12 Plug, M12 Socket, Shielded, Double Ended, GF Nylon

View on TE.com >



Cable Assemblies > Copper Cable Assemblies > M8/M12 Cable Assemblies











M8/M12 Application Type: Sensor/Actuator

Number of Positions: 5

Keying Code: A

Connector Type (End A): M12 Plug
Connector Type (End B): M12 Socket

### **Features**

# Product Type Features

| LED                        | Without        |
|----------------------------|----------------|
| Product Type               | Cable Assembly |
| Cable Type                 | PUR            |
| Assembly Type              | Pigtail        |
| Connector Type (End A)     | M12 Plug       |
| Connector Type (End B)     | M12 Socket     |
| Cable Assembly Type        | M12            |
| Configuration Features     |                |
| Number of Positions        | 5              |
| Keying Code                | A              |
| Electrical Characteristics |                |
| Operating Voltage          | 60 VDC         |
| Body Features              |                |
| Cable Exit Angle           | Right Angle    |



| Environmental Protection      | With                            |
|-------------------------------|---------------------------------|
| Conductor Material            | Copper Alloy                    |
| Connector Color               | Blue                            |
| Wire Color                    | Brown, White, Blue, Black, Gray |
| Cable Jacket Color            | Gray                            |
| Insulation Material           | PUR                             |
| Contact Features              |                                 |
| Contact Current Rating        | 4 A                             |
| Mechanical Attachment         |                                 |
| Screw & Hole Thread Size      | M12 x M12                       |
| Connector Orientation (End A) | Straight                        |
| Connector Orientation (End B) | Right Angle                     |
| Housing Features              |                                 |
| Housing Material              | GF Nylon                        |
| Dimensions                    |                                 |
| Wire Size                     | .34 mm <sup>2</sup>             |
| Operation/Application         |                                 |
| M8/M12 Application Type       | Sensor/Actuator                 |
| Shielded                      | Yes                             |
| Other                         |                                 |
| Field Serviceable             | Yes                             |
| Cable Assembly Length         | 1 m                             |

# **Product Compliance**

Cable Assembly Configuration

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU                  | Compliant with Exemptions  |
|---|--|
| EU ELV Directive 2000/53/EC                   | Compliant with Exemptions  |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2022<br>(224)<br>Candidate List Declared Against: JUNE<br>2022 (224) |

Double Ended



SVHC > Threshold:

Pb (1.9% in Component Part)

Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

| Halogen Content | Not Low Halogen - contains Br or Cl > 900 |
|-----------------|---|
|                 | ppm.                                      |

Solder Process Capability

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# Compatible Parts



# Also in the Series | M12 Connector

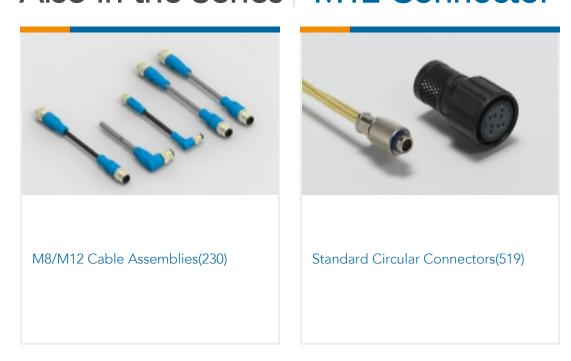

#### **Documents**

Product Drawings
M12-MS-5P-M12-FR-PUR-1.0-SH

English



#### **CAD Files**

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1SET314409R0000\_A.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1SET314409R0000\_A.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1SET314409R0000\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

### Datasheets & Catalog Pages

Infographic - entrelec ews-linecard

English

Catalog - ENTRELEC-M8-M12-RJ45

English

# **Product Specifications**

**Application Specification** 

English