Part number

MAF 24.25





Hood, C-TYPE series, with 4 pegs, M25 frontal cable entry, size "104.27", high construction

| Product description | |
|--|---|
| Product type | Hood |
| Series | C-TYPE |
| Closing type | With 4 pegs |
| Size | Size 104.27 |
| Cable entry | Frontal cable entry with adapter M25 |
| Specification | High construction |
| Technical data | |
| IP degree of protection | IP65 / IP66 / IP69 |
| Further technical details | |
| Weight | 288,00 g |
| Operating temperature range (min, max) | -40°C+125°C |

| Material properties | | |
|------------------------------|--|--|
| Colour | RAL 7040 grey | |
| RoHs conformity | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight | |
| China RoHs - EFUP | 50 | |
| REACH SVHC substances | Yes Lead | |
| SCIP number | 15deaf78-e939-4401-a0b0-e2228ca32a03 | |
| Approvals / Standards | | |
| Certifications | DNV, BV | |
| UL | ECBT2 | |
| cUL | ECBT8 | |
| General ordering information | | |
| EAN13 code | 8015747050258 | |
| eCl@ss 8.1 | 27440202 | |
| ETIM 7.0 | EC000437 | |
| Packaging Information | | |
| Sub-packaging weight | 1,44 kg | |
| Sub-packaging description | Plastic packaging | |
| Sub-packaging quantity | 5 Pcs | |
| Sub-packaging EAN barcode | 8015747050265 | |


Part number

MAF 24.25




Catalogue drawings

CHO [CAO] CHV (CAV) - MHO [MAO] MHV (MAV)



CHV G (CAV G) - MHV G (MAV G) - [MFV G]

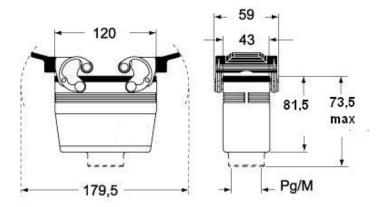

Notes

Dimensions shown in mm are not binding and may be changed without notice.