# 1SET315278R0000 - ACTIVE

### ENTRELEC | M12 Connector

TE Internal #: 1SET315278R0000 M12 Cable Assembly, 2 Position, .5 m, Industrial Fieldbus, PROFIBUS, Code B, M12 Plug, M12 Socket, Shielded, Double Ended, PA66+25GF

#### View on TE.com >

Cable Assemblies > Copper Cable Assemblies > M8/M12 Cable Assemblies



M8/M12 Application Type: Industrial Fieldbus

Industrial Protocols: **PROFIBUS** 

Number of Positions: 2

Keying Code: **B** 

Connector Type (End A): M12 Plug

## Features



## Product Type Features

LED	Without
Product Type	Cable Assembly
Cable Type	PUR
Assembly Type	Overmolded
Connector Type (End A)	M12 Plug
Connector Type (End B)	M12 Socket
Cable Assembly Type	M12
Configuration Features	
Number of Positions	2
Keying Code	В
Electrical Characteristics	
Operating Voltage	250 VDC
Body Features	
Environmental Protection	IP67

**C** For support call+1 800 522 6752

## 1SET315278R0000

M12 Cable Assembly, 2 Position, .5 m, Industrial Fieldbus, PROFIBUS, Code B, M12 Plug, M12 Socket, Shielded, Double Ended, PA66+25GF



Conductor Material	Copper Alloy
Connector Color	Black
Cable Jacket Color	Violet
Contact Features	
Contact Current Rating	4 A
Mechanical Attachment	
Connector Orientation (End A)	Right Angle
Connector Orientation (End B)	Straight
Housing Features	
Housing Material	PA66+25GF
Dimensions	
Overall Outside Cable Diameter	8 mm
Wire Size	22 AWG
Operation/Application	
M8/M12 Application Type	Industrial Fieldbus
Shielded	Yes

Inductor Standarda

П	IC	us	uy	/ J	lar	ICI	ar	us	

Industrial Protocols	PROFIBUS		
Packaging Features			
Packaging Method	Bag		
Packaging Quantity	5		
Other			
Cable Assembly Length	.5 m		
Cable Assembly Configuration	Double Ended		
Product Compliance For compliance documentation, visit the product page on TE.com>			
EU RoHS Directive 2011/65/EU	Compliant with Exemptions		
EU ELV Directive 2000/53/EC	Compliant with Exemptions		
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold		

**C** For support call+1 800 522 6752

### 1SET315278R0000

M12 Cable Assembly, 2 Position, .5 m, Industrial Fieldbus, PROFIBUS, Code B, M12 Plug, M12 Socket, Shielded, Double Ended, PA66+25GF



Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold: Pb (1.9% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable

governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Halogen Content

#### Solder Process Capability

Not reviewed for solder process capability


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**



## Also in the Series | M12 Connector

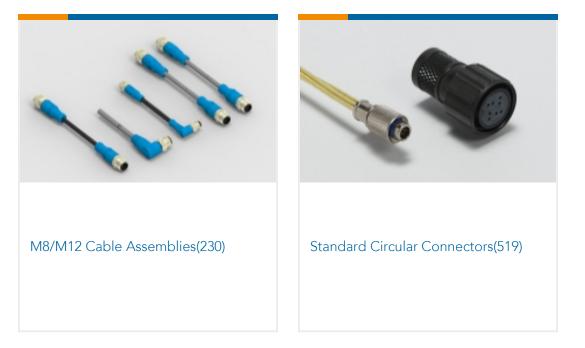

## Documents

## 1SET315278R0000

M12 Cable Assembly, 2 Position, .5 m, Industrial Fieldbus, PROFIBUS, Code B, M12 Plug, M12 Socket, Shielded, Double Ended, PA66+25GF



Product Drawings M12B2-MR-FS-PUR TORSION-0.5M

English

**CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1SET315278R0000\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1SET315278R0000\_A.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1SET315278R0000\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Infographic - entrelec ews-linecard

English

Catalog - ENTRELEC-M8-M12-RJ45

English

**Product Specifications** 

Application Specification

English