



6E801800d



ESC080


- (FR) Contact auxiliaire
- (EN) Auxiliary contact
- (DE) Hilfsschalter
- (IT) Contatto ausiliario
- (ES) Contacto auxiliar
- (PT) Contacto auxiliar
- (NL) Hulpcontact
- (SV) Hjälpkontäkt
- (DA) Hjaelpe kontakt
- (NO) Hjelpekontaktblokk
- (AR) ملحق موصل



ESC080	
	Ie μ 6A 250 V~ AC 12 Ie μ 2A 250 V~ AC 15
T °C	-5 / +40 °C

mini	1 mm ²	1,5 mm ²
maxi	6 mm ²	6 mm ²


- (FR) Signalisation
- (EN) Indication
- (DE) Meldung
- (IT) Segnalazione
- (ES) Senalización
- (PT) Sinalização
- (NL) Signalisatie
- (SV) Hjälpkontäkt till arbets, strom relä och kontaktore
- (DA) Indication
- (NO) Signaliserin
- (AR) إشارة

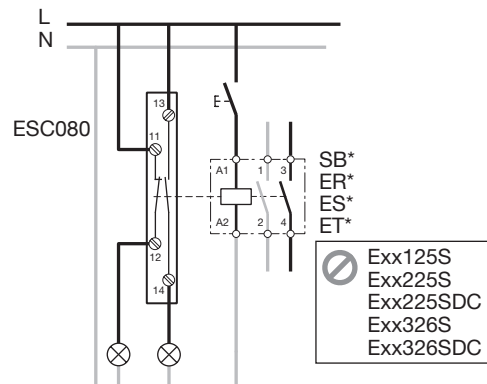

- Exx125S
- Exx225S
- Exx225SDC
- Exx326S
- Exx326SDC

ESC080

SB*

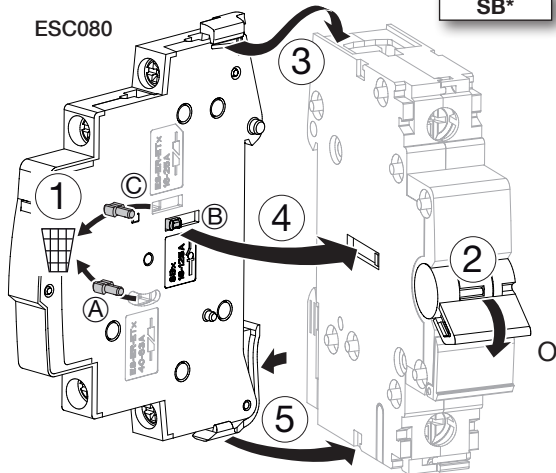


ESC080

ER*, ES*, ET*


16-25 A

- ⊘ Exx125S
- ⊘ Exx225S
- ⊘ Exx225SDC
- ⊘ Exx326S
- ⊘ Exx326SDC

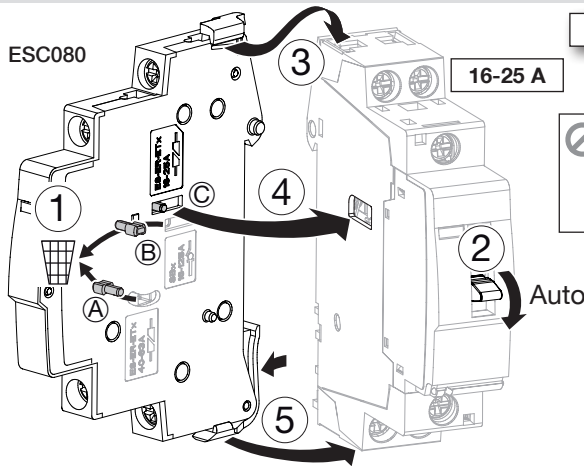

ESC080

40-63 A

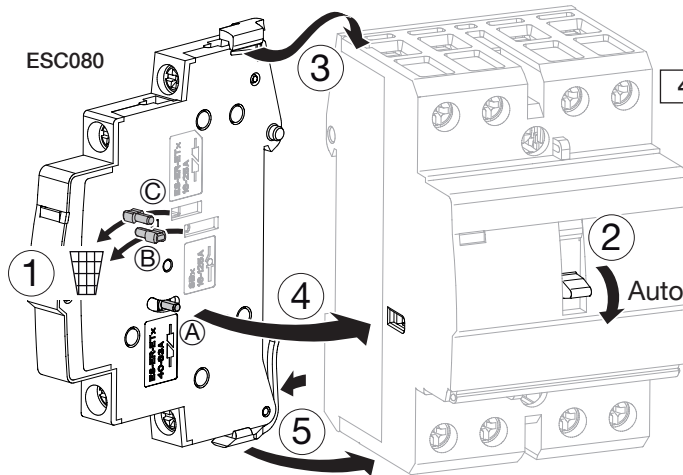

- ① { ER* - ES* - ET* 16-25 : A+B }
 { ER* - ES* - ET* 40-63 : B+C }
 SB* : A+C } 