



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P36G34M-XXYZ	SEE SHEET 2

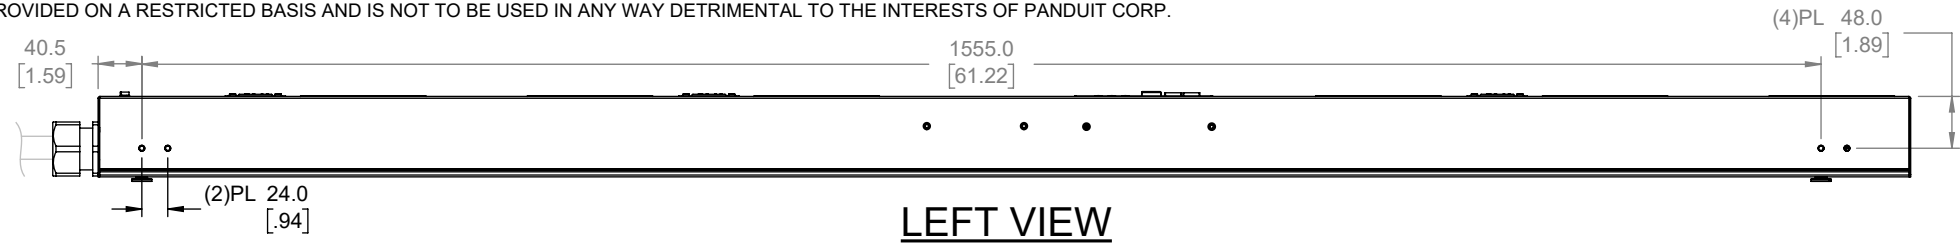

LEFT VIEW

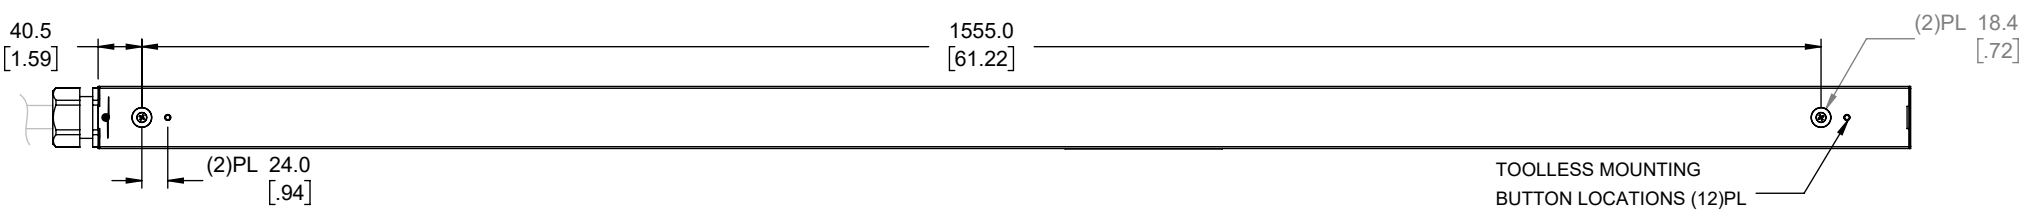

REAR VIEW

TOOLLESS MOUNTING  
BUTTON LOCATIONS (12)PL

SPECIFICATION:


- 1. STANDARD
  - UNIT TYPE: MONITORED & SWITCHED PER OUTLET
  - ORIENTATION: VERTICAL, 0U FULL
  - OUTLET QTY & TYPE: (24)C13, (12)C19
  - INPUT VOLTAGE: 415VAC (NA) / 346-415VAC (EU)
  - INPUT CURRENT: 20A (16A DERATED) (NA)/ 16A (EU)
  - BREAKER QTY & TYPE: (3) 20A, SINGLE-POLE
  - INPUT PHASE: THREE-PHASE (WYE)
  - RATED POWER: DUAL-RATED: 11.5kVA (NA) / 11.0kVA (EU)
  - INPUT PLUG: SEE TABLE SHEET 2
  - INPUT POWER CORD: SEE TABLE SHEET 2
  - REGULATORY STANDARD: RoHS COMPLIANT
- 2. ADDITIONAL:
  - OUTLET CONTROL RELAY: NORMALLY OPEN 80AMP INRUSH
- 3. ACCESSORIES:
  - (1) QUICK-START GUIDE

NOTES:


- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN [INCHES]
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PRODUCT
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION


FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P36G32M-XXYZ

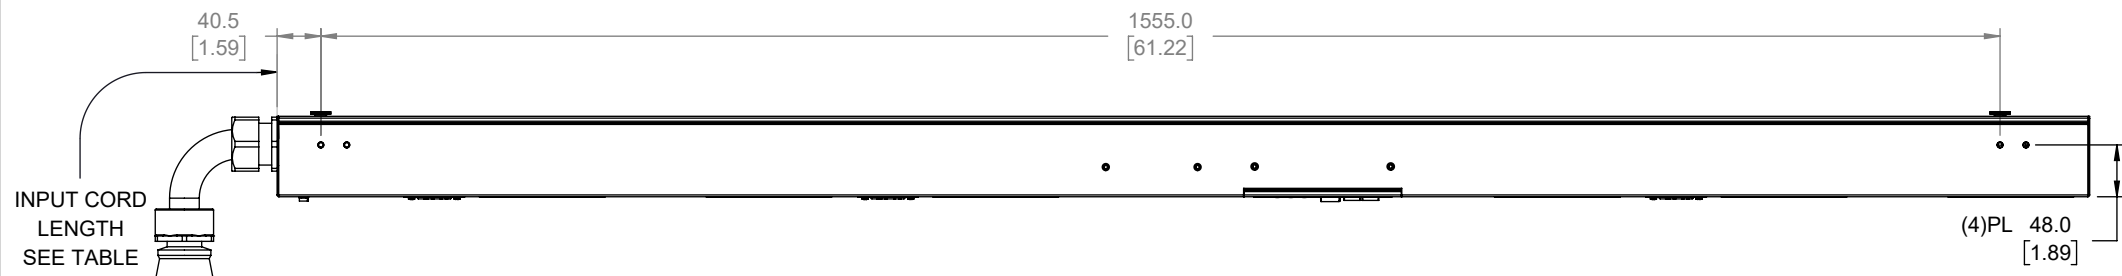

RIGHT VIEW

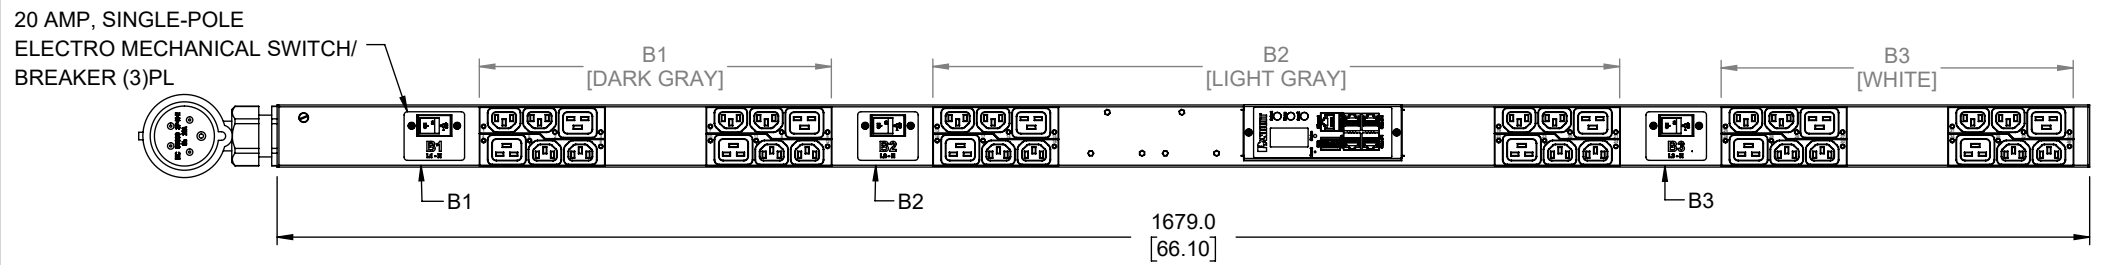


FRONT VIEW



BOTTOM VIEW

XX: FINISHED GOOD COLOR BL = BLACK YL =YELLOW RD =RED BU =BLUE WH =WHITE GN =GREEN	Y: INPUT FEED TYPE 1 =TOP-END FED 2 =BOTTOM-END FED	Z: INPUT CORD LENGTH A =1 METER B =2 METER C =3 METER
---	---	--

PLUG / RECEPTACLE BLOCK



**PLUG**  
IEC 60309, 4P 5W, 6H  
IP44 (SPASHPROOF)  
20A/ 16A, 415VAC MAX RATED INPUT  
(16A DERATED)



**RECEPTACLE**  
IEC 60320 C13  
10A, 250V MAX RATED OUTPUT



**RECEPTACLE**  
IEC 60320 C19  
16A, 250V MAX RATED OUTPUT

REV.	DATE	BY	CHK	APR	DESCRIPTION	ECN
01A	12/03/2021	WAC	PJST	MJD	INITIAL DC RELEASE	P36G32M
REVISIONS						

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.

TITLE: INTELLIGENT SERIES PDU  
**P36G32M-XXYZ**  
CUSTOMER DRAWING



BY: WAC	DATE: 11/21/2021	CHK: -	SCALE: NTS	MATERIAL: N/A	DRAWING NUMBER: P36G32M_DC	SHEET 1 OF 2	SIZE: B
---------	------------------	--------	------------	---------------	----------------------------	--------------	---------

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36G32M	MSPO PDU, 20AMP, (24)C13, (12)C19, IEC 60309 3P+N+E 6H-3M, TOP FED, BLACK	BLACK (9005)	3M (+254MM / -127MM) [10'(+10"/-5")]	12.6kg

B

B

A

A

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.

SIGN	
DATE	
PRINT	

TITLE  
**INTELLIGENT SERIES PDU**  
**P36G32M-XXYZ**  
 CUSTOMER DRAWING

ITEM REVISION NAME  
 DATASET FILE NAME

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: m m [IN]

Tolerance (mm)	
0<L≤50	±0.5
50<L≤250	±1.0
250<L≤500	±1.5
500<L≤1000	±2.5
1000<L≤2000	±4.0

THRID ANGLE  
 PROJECTION

MATERIAL:  
**N/A**

DRAWING NUMBER:  
**P36G32M\_DC**

BY	DATE	CHK	SCALE	SHEET 2 OF 2	SIZE
WAC	11/21/2021	-	NTS		B

REV.	DATE	BY	CHK	APR	DESCRIPTION	ECN
01A	12/03/2021	WAC	PJST	MJD	INITIAL DC RELEASE	P36G32M
REVISIONS						

