




| Product designation Product type designation | | Selector switch actuator key - 3 position LPCS33 |
|--|--------|---|
| General characteristics | | |
| Colour | | Black |
| Type of positions | | Selector switch |
| Material | | Polyamide |
| IEC degree of protection | | IP66, IP67 and IP69K |
| Mechanical features | | |
| Mechanical life | cycles | 1000000 |
| Mounting adapter | | LPXAU120 |
| Weight | g | 60 |
| UL technical data | | |
| UL degree of protection | | Type1, 2, 3R, 4, 4X, 12, 12K |
| Ambient conditions | | |
| Temperature | | |
| Operating temperature | | |

| operating temperature | | | |
|-----------------------|-----|----|-----|
| | min | °C | -25 |
| | max | °C | +70 |
| Storage temperature | | | |
| | min | °C | -40 |
| | max | °C | +85 |
| | | | |

Dimensions

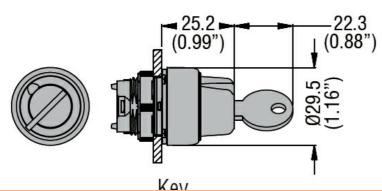

Certifications and compliance

| Compliance | |
|--------------|---------------------|
| | CSA C22.2 n° 14 |
| | IEC/EN/BS 60947-1 |
| | IEC/EN/BS 60947-5-1 |
| | UL508 |
| Certificates | |
| | CCC |
| | cULus |



LPCS333R520E SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES CHROMED PLASTIC, 3 POSITION, 1 - 0 - 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 2

ETIM classification

ETIM 8.0

EC000222 -Front element for selector switch