THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

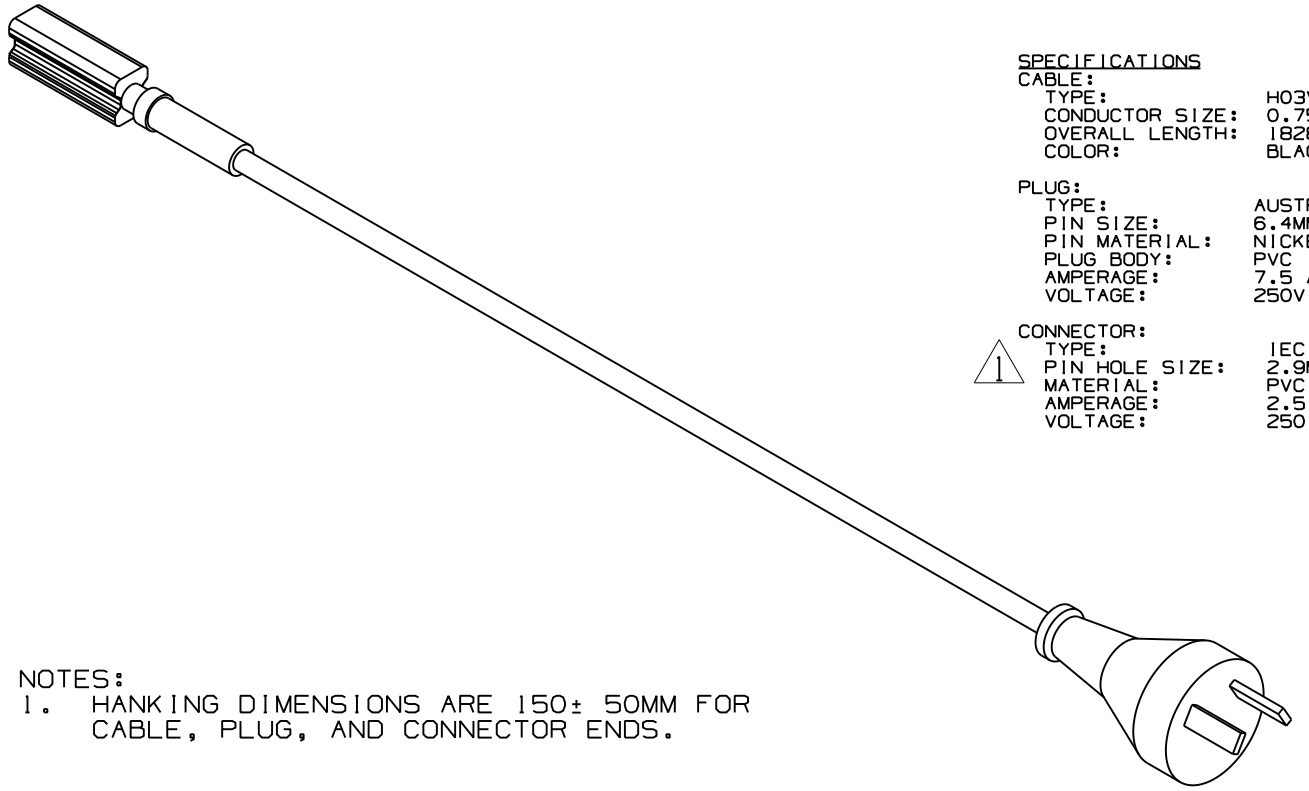

SPECIFICATIONS

CABLE:
- TYPE: H03VVH2-F
- CONDUCTOR SIZE: 0.75MM²
- OVERALL LENGTH: 1828MM ±30MM
- COLOR: BLACK

PLUG:
- TYPE: AUSTRALIAN 2 COND. PLUG STRAIGHT
- PIN SIZE: 6.4MM X 1.6MM
- PIN MATERIAL: NICKEL PLATED BRASS
- PLUG BODY: PVC
- AMPERAGE: 7.5 AMP MAX
- VOLTAGE: 250V

CONNECTOR:
- TYPE: IEC 60320-C7
- 1 PIN HOLE SIZE: 2.9MM
- MATERIAL: PVC
- AMPERAGE: 2.5 AMP MAX
- VOLTAGE: 250 VOLT

NOTES:
1. HANKING DIMENSIONS ARE 150± 50MM FOR CABLE, PLUG, AND CONNECTOR ENDS.

REV	DATE	BY	CHK	DESCRIPTION	ECN	-	R	CUST	SUP
1	10/27/09	RVU		CHANGED PART NUMBER TO "Y". THE ROHS COMPLIANT PART. IEC 60320-C7 WAS IEC 320-C7.	5893		R		
0	2-20-06	RVU		DRAWING RELEASE.	4376		R		
A	2-20-06	RVU		ENGINEERING RELEASE.	0000				

CAD FILENAME/LAYERS: 100739AS-DC-C10394/01B

PANDUIT CORP. TINLEY PARK, ILLINOIS

CUSTOMER DRAWING
AUSTRALIAN POWER SUPPLY CORD RoHS COMPLIANT
PART NO. CORD-A2CY 1

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ±
(.XX) ± ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY: RVU
MAT'L: SEE ABOVE
SCALE: NONE
DATE: 2-20-06
CHK'D:
DRAWING NO.: C10394
DWG SIZE: A