


Part number

CR BDSH6G

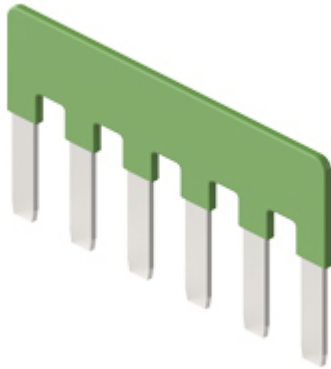

Bridge, 6 poles, for CDSH-SQUICH® inserts,
green colour

Product description

Product type	Bridge
N. of poles	6 poles
Specification	For CDSH-SQUICH® inserts Green colour

Technical data

Current	10 A
Voltage	50 V
Rated impulse withstand voltage	0,8 kV
Pollution degree	3

Further technical details

Characteristics according to EN 61984	10 A 50 V 0,8 kV 3
Weight	1,50 g
Operating temperature range (min, max)	-40 °C ... +125 °C

General ordering information

EAN13 code	8015747272858
eCl@ss 8.1	27141140
ETIM 7.0	EC000489

Packaging Information


Sub-packaging weight	0,02 kg
Sub-packaging description	Plastic bag
Sub-packaging quantity	10 Pcs
Sub-packaging EAN barcode	8015747274517

Part number

CR BDSH6G



Catalogue drawings

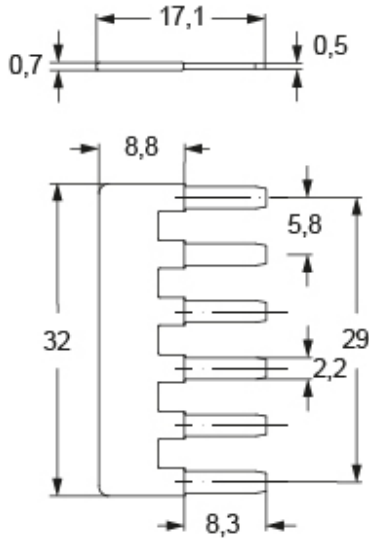

Notes

CR BDSH parallel bridges shall be used only with unprepared conductors up to 1,5 mm² / 16 AWG.

The rated current applies to the conductor used to feed the CR BDSH parallel bridge, it applies to the above indicated maximum wire size and is distributed to all pins in parallel in a manner inversely proportional to the impedance of the served branch circuit. When all branches are with identical impedance, the current is equally divided by the number of served branches in parallel.

Dimensions shown in mm are not binding and may be changed without notice.