
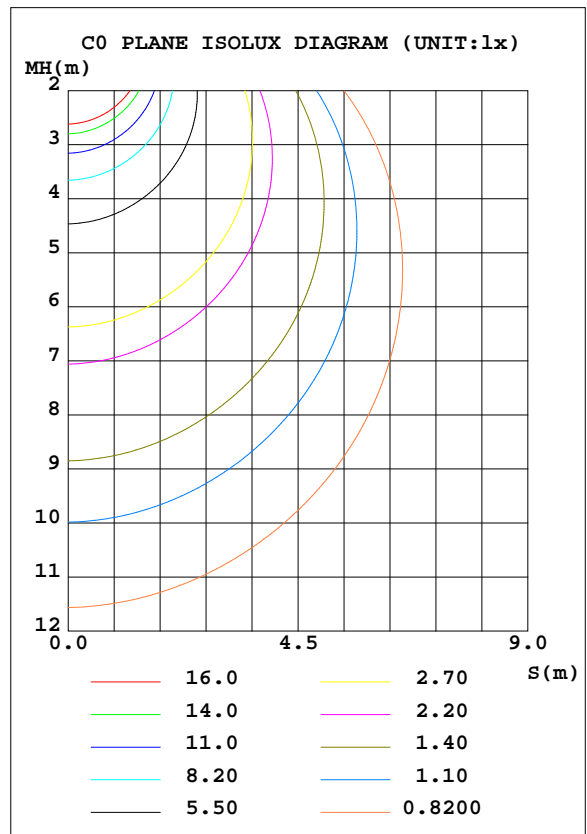


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.97V I:0.0641A P:7.9912W PF:0.5419 Freq:50.00Hz Lamp Flux:761.905x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: A60_s_9aSA-A806ST-Q1	DIM.:	SERIAL No.: A2017023A001
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 95.34 lm/W			
MODEL		I <sub>max</sub> (cd)	110.2	S/MH(C0/180)	1.45
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.41
RATED VOLTAGE(V)		TOTAL FLUX(lm)	761.91	η UP, DN(C0-180)	14.8, 36.2
NOMINAL FLUX(lm)	761.905	CIE CLASS	SEMI-D.	η UP, DN(C180-360)	14.0, 35.0
LAMPS INSIDE	1	η up(%)	28.8	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)		η down(%)	71.2	CIBSE SHR MAX	1.55

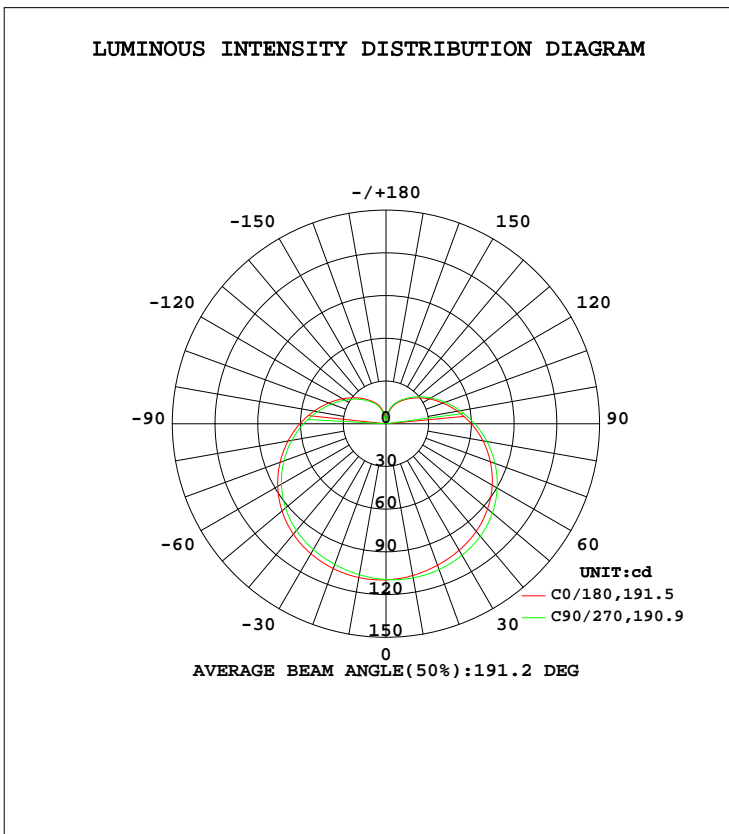

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.7DEG  
 Operators:LSC  
 Test Date:2020-09-22

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.429  
 Humidity:48%  
 Test Distance:1.533m [K=1.0000]  
 Remarks:

Checker:

Assessor: LiHua