


## BOUCHON ATEX LAITON NICKELE

<b>MATIERE :</b>	Laiton Nickelé
<b>INDICE DE PROTECTION :</b>	IP66/68 (EN 60529)
<b>TENUE EN TEMPERATURE :</b>	-70°C / +400°C (sans joint)
<b>CERTIFICAT :</b>	ATEX INERIS 12 ATEX 0089X / IEC Ex: IEC Ex INE 10.0014X / EAC: RU C-IT.A 45.B.00081
<b>MODE DE PROTECTION Ex :</b>	Exd IIC / Ex e II (gas) / Ex tb IIIC (dusts) / Ex d I / Ex e I (mines)

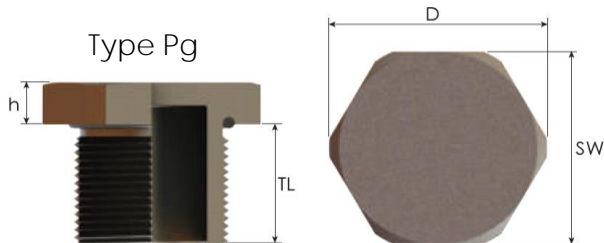

Filetage ISO	Code BLM	Dimensions		
		TL	h	SW
Pg 7	<b>204 07 4</b>	15	5	17,6
Pg 9	<b>204 09 4</b>	15	5	22
Pg 11	<b>204 11 4</b>	15	5	26,4
Pg 13	<b>204 13 4</b>	15	5	28,6
Pg 16	<b>204 17 4</b>	15	5	28,6
Pg 21	<b>204 21 4</b>	15	5	35
Pg 29	<b>204 29 4</b>	15	5	44
Pg 36	<b>204 36 4</b>	15	8	55
Pg 42	<b>204 42 4</b>	20	8	65
Pg 48	<b>204 48 4</b>	20	8	74

Cotes en mm