1SET310860R0000 <

ENTRELEC | M12 Connector

TE Internal #: 1SET310860R0000 Standard Circular Connectors, Wire-to-Panel, 12 Position, Sealable, Wire & Cable, Signal, Panel Mount, Reverse Gender, Nickel, M12 Connector

View on TE.com >

Connectors > Circular Connectors > Standard Circular Connectors



Connector System: Wire-to-Panel Number of Positions: 12 Sealable: Yes

=TE

Connector & Contact Terminates To: Wire & Cable

Contact Current Rating (Max): 1.5 A

Features



Product Type Features

Product Type	Connector Assembly
Accessory Color	Black
Assembly Type	Electrical Connector
Connector System	Wire-to-Panel
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Circular Connector Type	Plug
Shell Type	Metal
Configuration Features	
Keying & Polarized Position Locations	A
Factory Installed Backshell	No
Keying	A
Number of Positions	12
Number of Power Positions	0

1SET310860R0000

Standard Circular Connectors, Wire-to-Panel, 12 Position, Sealable, Wire & Cable, Signal, Panel Mount, Reverse Gender, Nickel, M12 Connector



Number of Signal Positions	12
Contacts Preloaded	Yes
Electrical Characteristics	
Operating Voltage	30 VAC
Body Features	
Peripheral Seal Material	Silicone
Environmental Protection	IP67
O-Ring Material	Silicone
Environmental Protection Type	Elastomer Sealed
Shell Plating Material	Nickel
Shell Base Material	Copper Alloy
Circular Connector Insulation Material Type	Polyamide 66 GF25
Contact Features	
Contact Current Rating (Max)	1.5 A
Reverse Gender	Yes
Circular Connector Contact Type	Pin

Mechanical Attachment

Connector Mounting Type	Panel Mount
Polarization Code	A
Mating Alignment Type	Keyed
Mating Retention	With
Housing Features	
Circular Connector Shell Size	18
Dimensions	
Wire Size	26 – 24 AWG
Usage Conditions	
IP Water Sealing Level	IP67
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Circuit Application	Signal
Shielded	No
Industry Standards	

1SET310860R0000

Standard Circular Connectors, Wire-to-Panel, 12 Position, Sealable, Wire & Cable, Signal, Panel Mount, Reverse Gender, Nickel, M12 Connector



UL Flammability Rating	UL 94HB
Packaging Features	
Packaging Quantity	1
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | M12 Connector

C For support call+1 800 522 6752

1SET310860R0000

Standard Circular Connectors, Wire-to-Panel, 12 Position, Sealable, Wire & Cable, Signal, Panel Mount, Reverse Gender, Nickel, M12 Connector



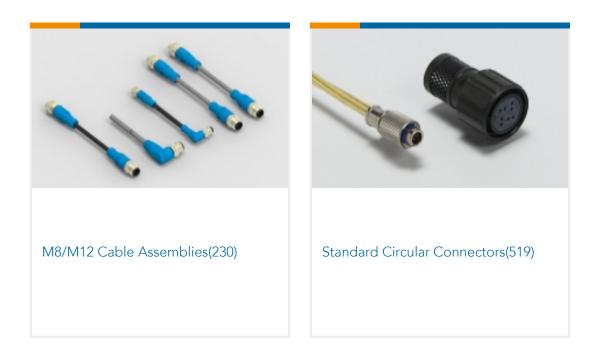

Documents

Product Drawings M12-MB-12CON-PG9-LAU

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SET310860R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SET310860R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SET310860R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Infographic - entrelec ews-linecard

English

Catalog - ENTRELEC-M8-M12-RJ45

English

Product Specifications Application Specification

English