



Product designation

Signal tower
Ø50mm/1.97"

Product type designation

LTN50

General characteristics

| | | |
|--------------------------|-----------|-----------|
| Diameter | mm - inch | 50 / 1.97 |
| Supply voltage (AC) | V | 110...230 |
| IEC degree of protection | | IP65 |
| Power consumption | VA | 1 |

Mechanical features

Terminals screw Spring terminals


| | | | | |
|-------------------|-----------|-----|-----------------|------|
| Conductor section | AWG/Kcmil | min | 16 | |
| | | max | 24 | |
| | IEC | min | mm ² | 0.25 |
| | | max | mm ² | 1.5 |

Weight g 222


Ambient conditions

| | | | | |
|-------------|-----------------------|-----|----|-----|
| Temperature | Operating temperature | min | °C | -30 |
| | | max | °C | +50 |

Dimensions

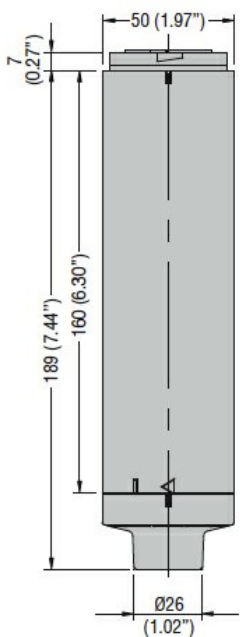

Wiring diagrams

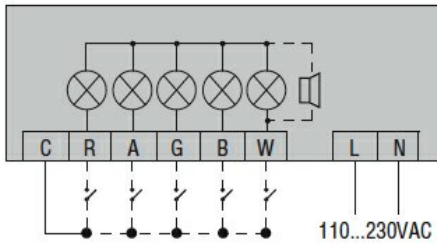

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

cULus

ETIM classification

ETIM 8.0

EC001154 -
Stand for signal
tower without
tube