



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT P/N	WEIGHT
P48E25M-XXYZ	SEE SHEET 2

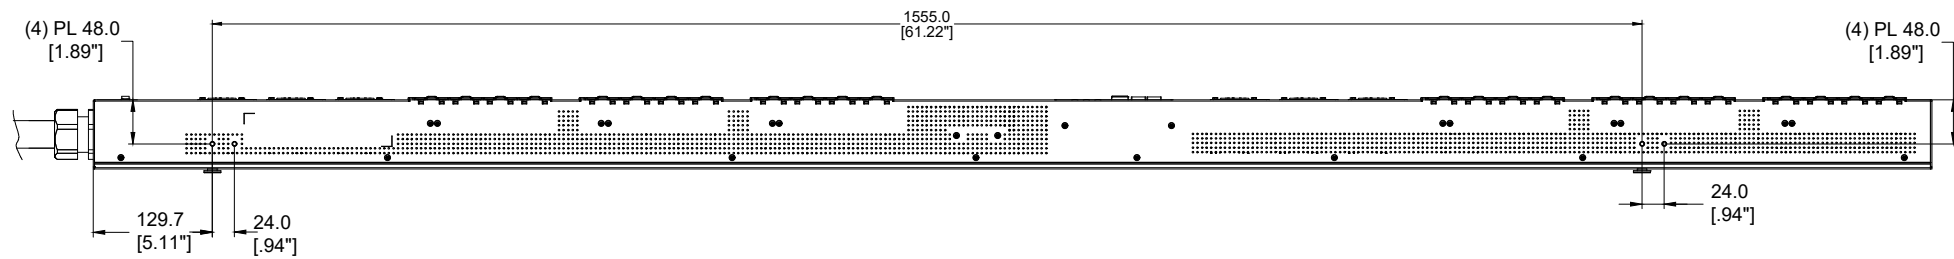


LEFT VIEW

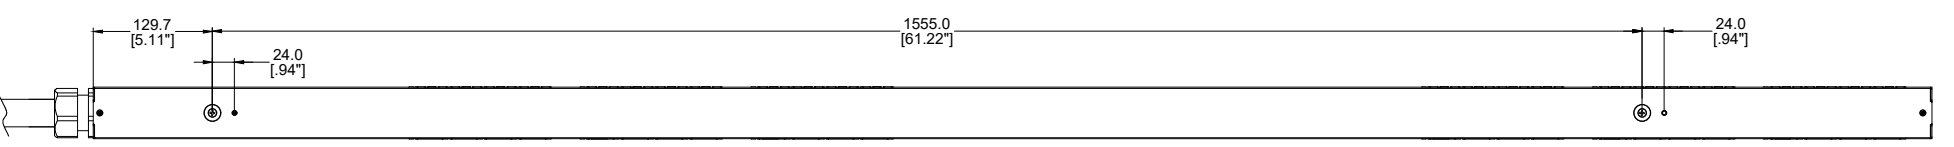

REAR VIEW

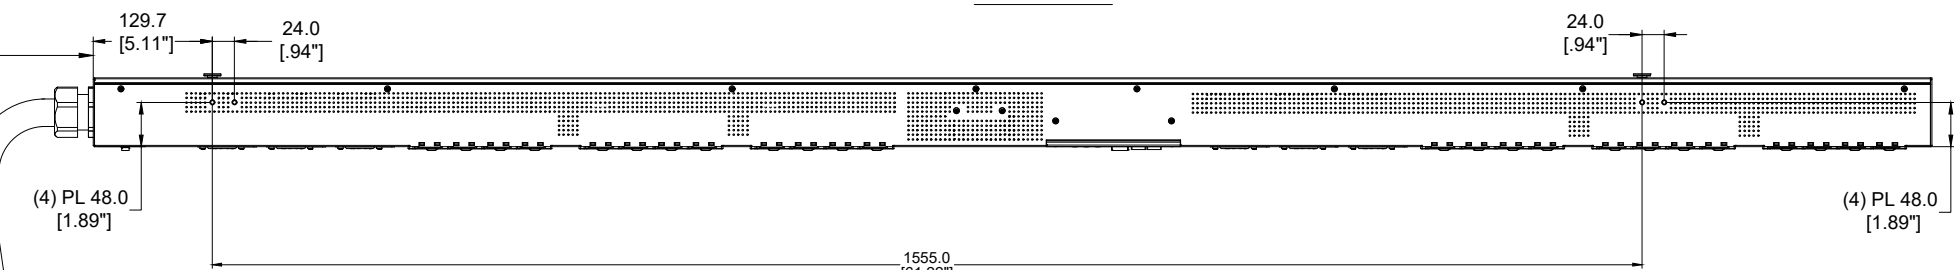

SIDE VIEW

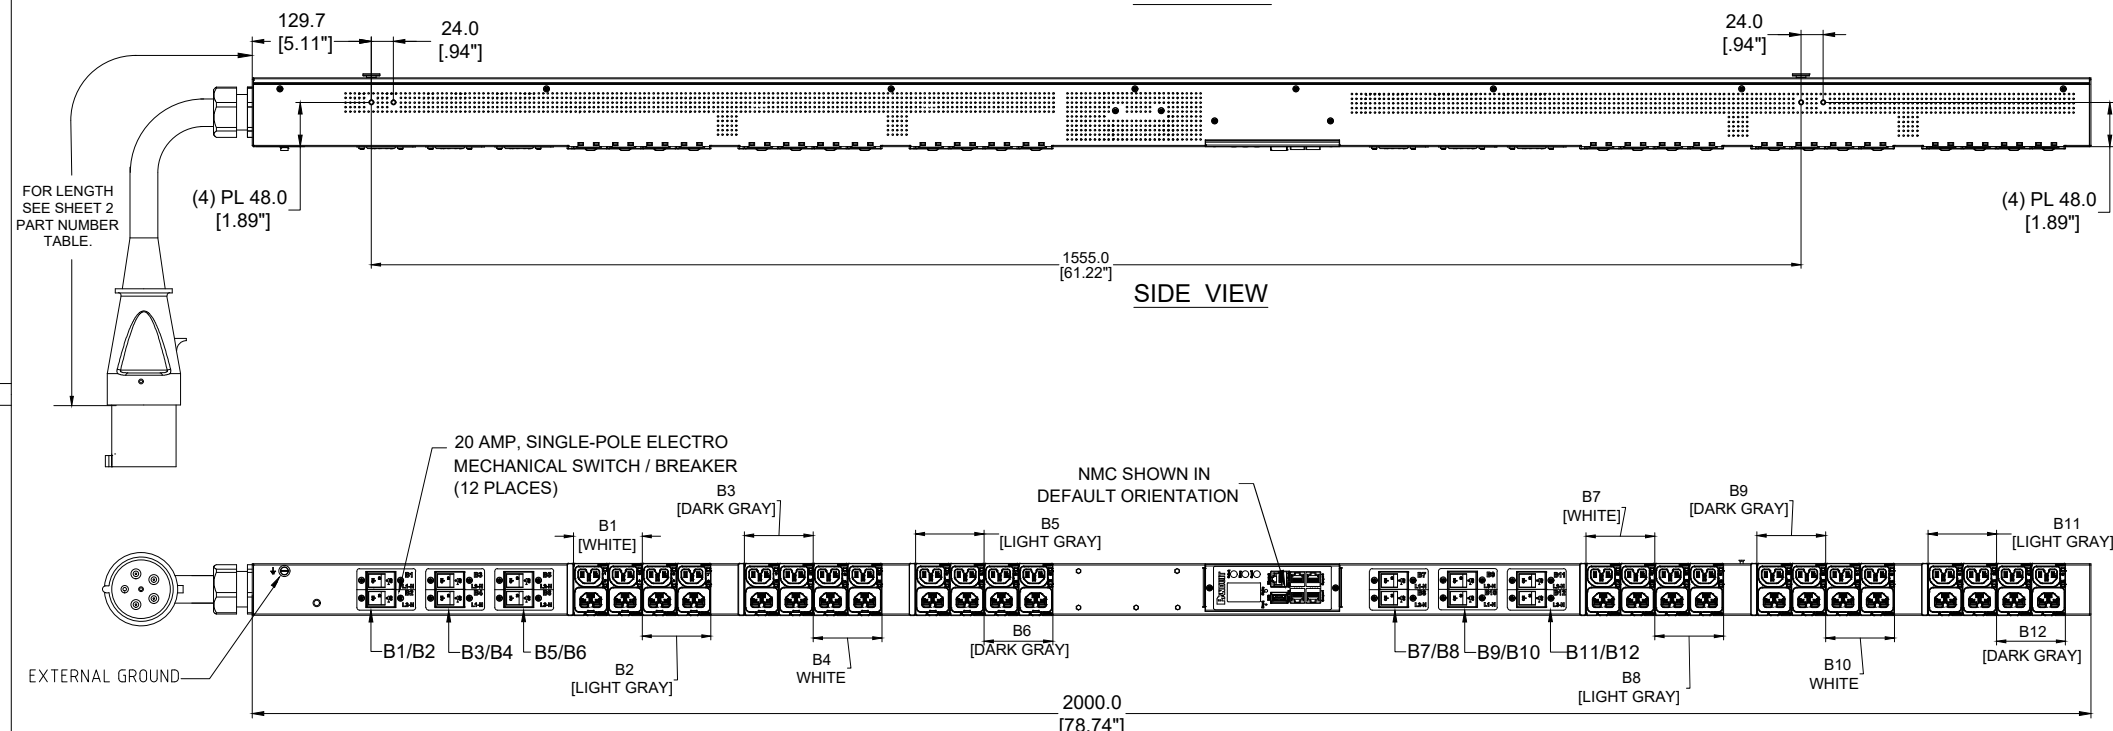

FRONT VIEW

SPECIFICATION:

- 1. STANDARD:**
 - UNIT TYPE: MONITORED SWITCHED
 - ORIENTATION: VERTICAL, 0U FULL
 - OUTLET QTY&TYPE: (24)C13/C15,(24)C13/C15/C19
 - INPUT VOLTAGE: 200-240/346-415VAC
 - INPUT CURRENT: 60A (48A DERATED) (NA) / 63A (EU)
 - BREAKER QTY&TYPE: (12) 20AMP, SINGLE-POLE, 10 KA
 - INPUT PHASE: THREE-PHASE, WYE
 - RATED POWER: DUAL-RATED: 34.6kVA (NA)/43.5kVA(EU)
 - INPUT PLUG: IEC 60309, 3P+N+E, 6H, 60A/63A (IP44)
 - INPUT POWER CORD: SEE SHEET 2 PART NUMBER TABLE
 - REGULATORY STANDARD: RoHS COMPLIANT

2. ADDITIONAL:

NONE

3. ACCESSORIES:


- (1) QUICK-START GUIDE

NOTES:

- 1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
- 2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
- 3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- 4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
- 5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: **P48E25M-XX Y Z**



BOTTOM VIEW

XX: FINISHED GOOD COLOR BL =BLACK RD =RED WH =WHITE	Y: INPUT FEED TYPE 1 =TOP-END FED 2 =BOTTOM-END FED	Z: INPUT CORD LENGTH A =1 METER B =2 METER C =3 METER
---	--	---

PLUG/RECEPTACLE BLOCK



PLUG
IEC 60309, 3P+N+E,6H
IP44(SPLASHPROOF)
DUAL RATED 60A(48A DERATED)/63A
346-415V MAX RATED INPUT



RECEPTACLES
C13/C15 COMBO
10A, 250V MAX RATED OUTPUT




RECEPTACLES
C13/C15/C19 COMBO
16A, 250V MAX RATED OUTPUT

01A	12/20/2022	LRF	CSH	MJD	INITIAL RELEASE	P48E25M-XXYZ
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.	SIGN
	DATE
	PRINT

TITLE	INTELLIGENT SERIES PDU P48E25M-XXYZ CUSTOMER DRAWING
ITEM REVISION NAME:	
DATASHEET FILE NAME:	



UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]	MATERIAL/COLOR:
Tolerance(mm)	N/A
0.4<50 ±0.5	
0.4<250 ±1.0	
250<4<500 ±1.5	
500<4<1000 ±2.5	
1000<4<2000 ±4.0	

DRAWN BY: LRF	DATE: 12/20/2022	CHK: Hanson	SCALE: NONE	DRAWING NUMBER: P48E25M-XXYZ_DC	SCALE: B
				SHT 1 OF 2	

2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P48E25M	VERTICAL,(24)C13/C15,(24)C13/15/C19,MONITORED SWITCHED ,200-240/346-415VAC/60A (48A DERATED)(NA)/63A(EU) /3 PHASE, TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254mm/-127mm) 10' [+10"/-5"]	7.5kg

B

B

A

A

01A	12/20/2022	LRF	CSH	MJD	INITIAL RELEASE	P48E25M-XXYZ
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.		SIGN _____ DATE _____ PRINT _____	
TITLE INTELLIGENT SERIES PDU P48E25M-XXYZ CONTROL DRAWING			
ITEM REVISION NAME:		PANDUIT	
DATASHEET FILE NAME:		MATERIAL/COLOR: N/A	
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		DRAWING NUMBER: P48E25M-XXYZ_DC	
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		THIRD ANGLE PROJECTION	
DRAWN BY	DATE	CHK	SCALE
LRF	12/20/2022	Hanson	NONE
SHT 2 OF 2			SCALE B

2



1