



**Product Description:**

La gamme de downlights extra-plat Slim-Fit™ a été conçue pour offrir une uniformité et un rendement lumineux supérieurs en utilisant la dernière technologie d'éclairage latéral. Avec seulement 25 mm de profondeur, support compris, elle offre la solution idéale lorsqu'un flux lumineux élevé est nécessaire malgré un espace sous plafond réduit.


**Product Image:**

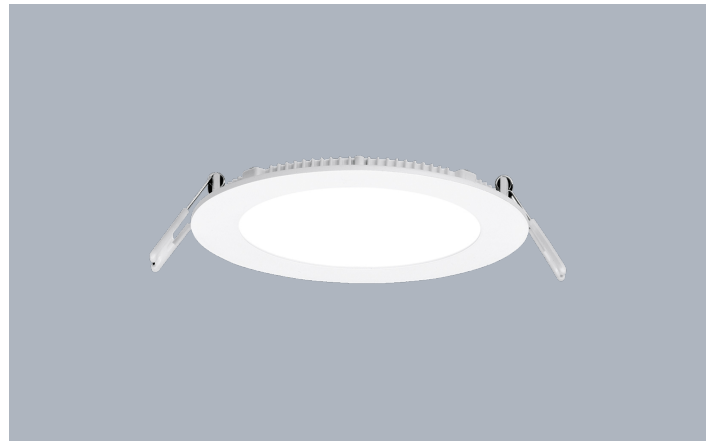

**Line Drawing**



**Polar Curve**




**Product Specs:**

<b>Technology</b>	LED	<b>Input Voltage</b>	220-240V AC
<b>Lamp Base</b>	Aucun	<b>Positional Adjustment</b>	Fixe
<b>Number of LEDs</b>	45	<b>Luminaire Distribution</b>	Accentuation
<b>Lifetime L70 (hrs)</b>	25.000	<b>Input Frequency</b>	50/60HZ
<b>Dimmable</b>	Non	<b>IP Rating</b>	IP44
<b>IK Rating</b>	IK07	<b>Operating Env. Temp. (Min) °C</b>	-20°C
<b>Operating Env. Temp. (Max) °C</b>	40°C	<b>Power Factor</b>	0.9
<b>Overall Diameter (mm)</b>	145	<b>Height (mm)</b>	25
<b>Recess Depth (mm)</b>	50	<b>Cutout Diameter (mm)</b>	133
<b>Weight (Kg)</b>	0.221		

## SKU Table and Ordering:

SKU Code	Wattage	Beam Angle	Lumens	Lumens/Watt	CRI	Colour	Finish Colour
EN-PL09B/30	9	110	750	50	80	3000	Blanc mat
EN-PL09B/30EM	9	110	450	50	80	3000	Blanc
EN-PL09B/30X	9	110	750	50	80	3000	Blanc mat
EN-PL09B/40	9	110	755	56	80	4000	Blanc mat
EN-PL09B/40EM	9	110	500		80	4000	Blanc
EN-PL09B/40X	9	110	755		80	4000	Blanc
EN-PL09B/65	9	110	765	62	80	6500	Blanc mat
EN-PL09B/65EM	9	110	550		80	6500	Blanc
EN-PL09BDA/30	9	110	450	50	80	3000	Blanc mat
EN-PL09BDA/40	9	110	500	56	80	4000	Blanc mat
EN-PL09BDA/65	9	110	550	62	80	6500	Blanc mat
EN-PL09BV/30	9	110	450	50	80	3000	Blanc mat
EN-PL09BV/40	9	110	500	56	80	4000	Blanc mat
EN-PL09BV/65	9	110	550	62	80	6500	Blanc mat

## Compliance & Approvals:



## Warranty:

This product has a guarantee period of . Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.

**UK Head Office**  
Apex Park  
6 Little Burrow  
Welwyn Garden City AL7 4SW  
United Kingdom  
Tel : +44 (0) 1727 83 66 11