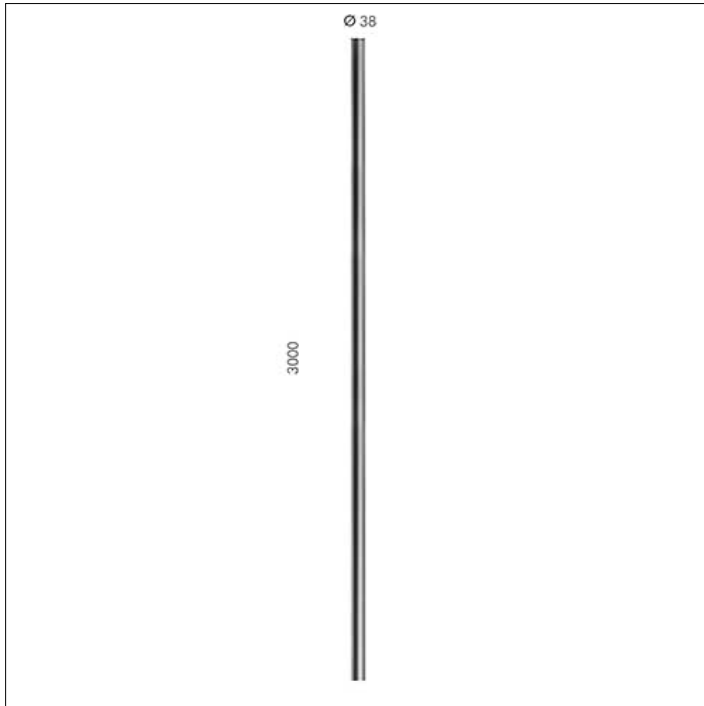


ACCESSOIRE**S.2805
POTEAU CYLINDRIQUE H 3,0m Ø38mm**

Cylindrical shaped poles consisting of: straight circular section shaft, Ø 38mm, 4mm in thickness, total length 3,00m, single section built by using longitudinally welded tubes by induction welding (ERW) UNI EN 10219-2-ISO 4200

Suitable for ground recessed installation to a cement base 0,50m (Accessory S.2806) : Suggested reinforced concrete footstall dimension 1,0m x 1,0m h 0,7m. Footstall dimension can be calculated according to your country norms and ground properties.

The grade of steel used is S235JR (Fe360B) with material characteristics as per normative UNI EN 10025;

The surface protection treatment is done through hot dip galvanization.

Painting Process: PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content. POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions. Resistance test protection for Marine applications for 1500h.

**POUR UNE MISE EN PLACE CORRECTE DU POTEAU S.2805,
LA BRIDE S.2806 DOIT ÊTRE ENTERRÉE**

Accessoire disponible dans les couleurs suivantes: Vert foncé (cod.07), Bronze bruni (cod.20), Gris anthracite (cod.24)