

1SET411016R0000 ✓ ACTIVE

ENTRELEC


TE Internal #: 1SET411016R0000

Wiring Duct, PVC, Height 100 mm [3.937 in], Length 2000 mm [78.74 in], Width 60 mm [2.362 in], -5 – 60 °C [23 – 140 °F]

[View on TE.com >](#)



Wire Protection & Management > Wiring Ducts & Accessories > Wiring Ducts & Covers

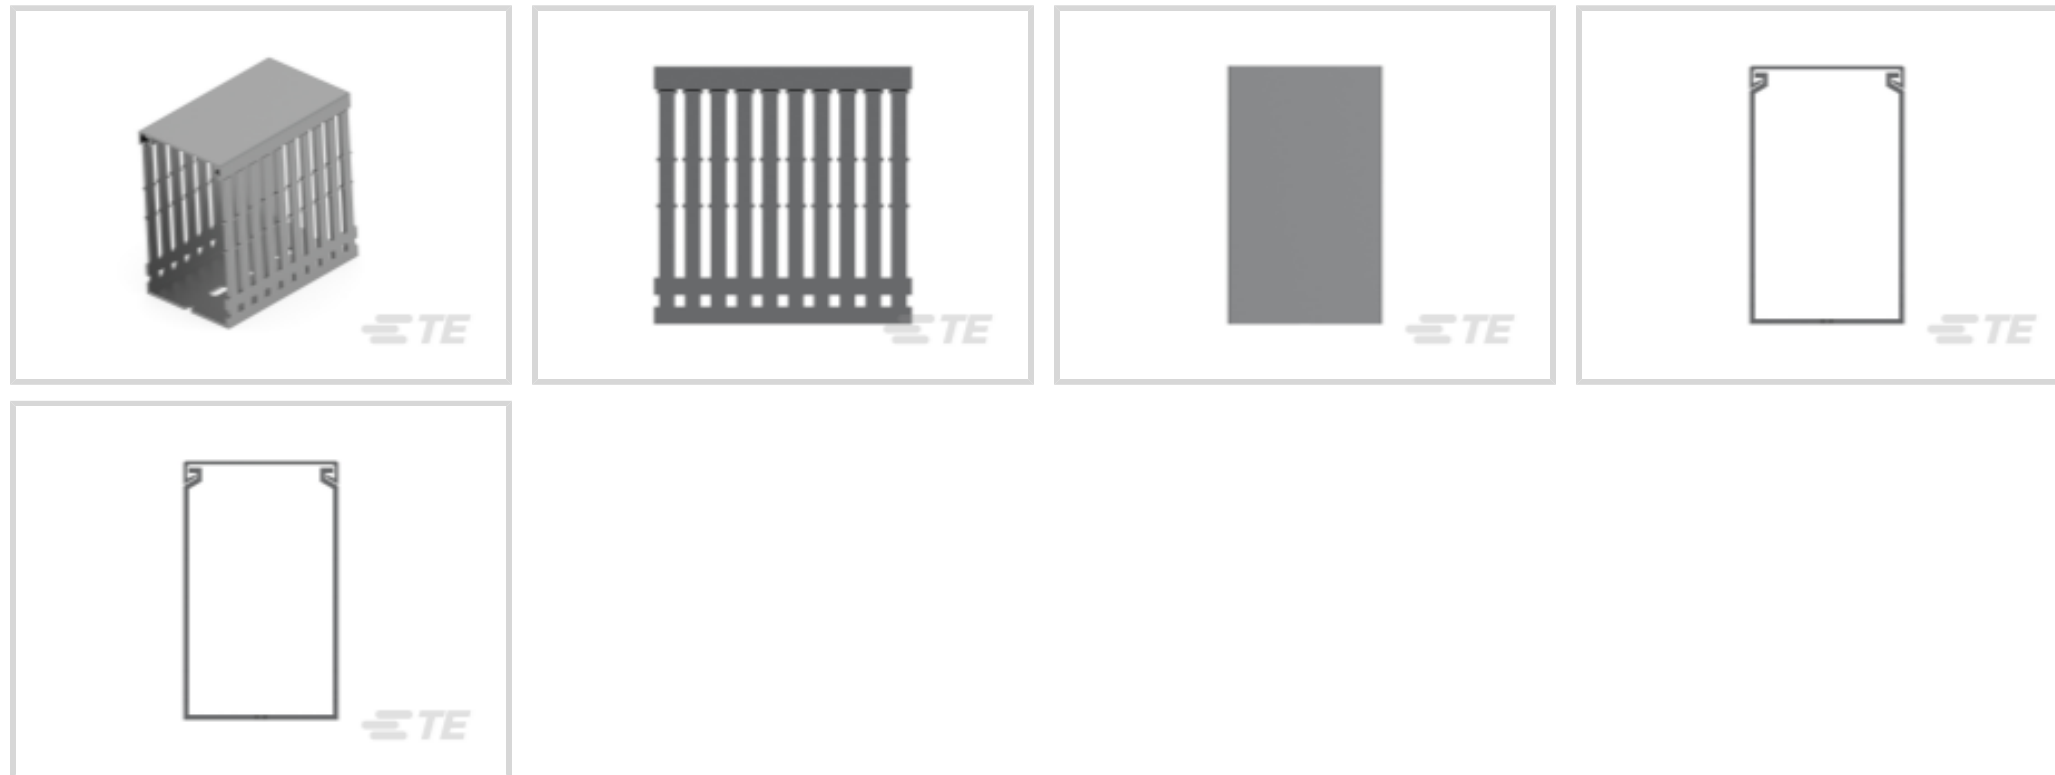

Wiring Duct Product Type: **Wiring Duct**

Wiring Duct & Accessory Material: **PVC**

Product Height: **100 mm [3.937 in]**

Product Length: **2000 mm [78.74 in]**

Product Width: **60 mm [2.362 in]**

Features

Product Type Features

Wiring Duct Product Type	Wiring Duct
--------------------------	-------------

Body Features

Primary Product Color	Gray
-----------------------	------

Housing Features

Wiring Duct & Accessory Material	PVC
----------------------------------	-----

Dimensions

Product Height	100 mm[3.937 in]
Product Length	2000 mm[78.74 in]
Product Width	60 mm[2.362 in]

Usage Conditions

Operating Temperature Range	-5 – 60 °C[23 – 140 °F]
-----------------------------	-------------------------

Packaging Features

Packaging Quantity	18
--------------------	----

Product Compliance




[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Out of Scope
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 <p>TE Part # 1SET411203R0000 WD-1-CP-GR060</p>	 <p>TE Part # 1SET411301R0000 WD-1-RT-4040</p>	 <p>TE Part # 1SET411302R0000 WD-1-RT-4060</p>	 <p>TE Part # 1SET411303R0000 WD-1-RT-6080</p>
 <p>TE Part # 1SET411304R0000 WD-1-RT-4080</p>	 <p>TE Part # 1SET411305R0000 WD-1-RT-6040</p>	 <p>TE Part # 1SET411306R0000 WD-1-RT-6060</p>	 <p>TE Part # 1SET411307R0000 WD-1-RT-6010</p>



Documents

Product Drawings

[WD-1-DP-GR6010](#)

French

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_1SET411016R0000_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1SET411016R0000_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1SET411016R0000_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Infographic - entrelec ews-linecard](#)

English

[Datasheet - ENTRELEC-wiring-duct-DS](#)

English

[Datasheet - Entrelec Electrical-Solutions](#)

[Essential Entrelec Terminal Blocks](#)

French

1SET411016R0000

Wiring Duct, PVC, Height 100 mm [3.937 in], Length 2000 mm [78.74 in], Width 60 mm [2.362 in], -5 – 60 °C [23 – 140 °F]



Essential Entelec Terminal Blocks

English

Agency Approvals

UL

English