


# NatureConnect

by @signify


## Daylight W60L60 panel

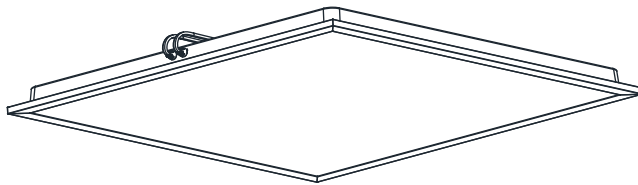

Driver in separate box



	Power	Current	Voltage	Dimensions* LxWxH	EU Energy class of the light source	
Daylight W60L60 panel	32 W	max. 2x 0.37 A	max. 60 V	595x595x36.5 mm 23.4x23.4x1.44 in	C	5 kg (including driver) 11 lb (including driver)




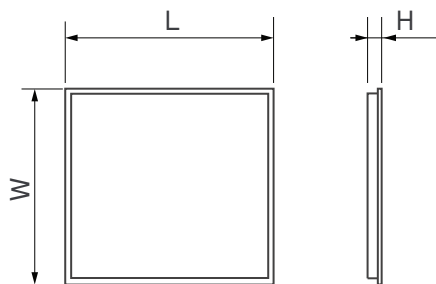


### VPC Visible Profile Ceiling



Ensure that the VPC is compatible with the weight and dimensions of the luminaire.


Use adapter frame for ceilings with deviating dimensions.

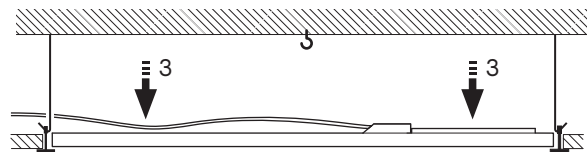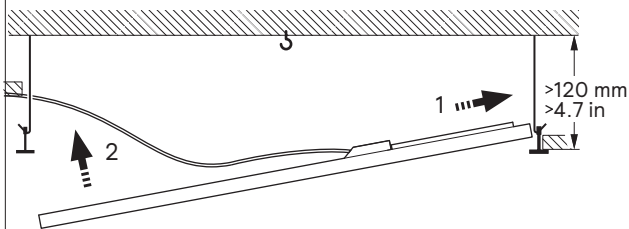

A



Always use gloves when installing luminaire.

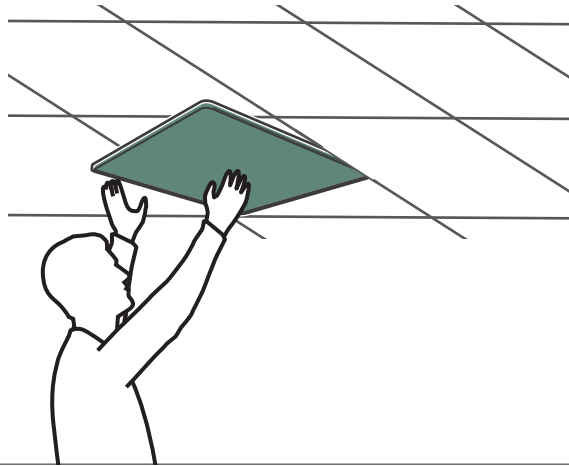

- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- The light source and/or the external flexible cable contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- During installation or maintaining the luminaire please use gloves to avoid spots on the cover.
- To remove dust and spots use the following:
  - Dust: use micro fiber cloths only
  - Fingerprints, etc.: use a cleaner for synthetic materials with antistatic properties.
- External control gear shall provide at least double or reinforced insulation between LV supply and output.
- The product is IPX0 & as such is not protected against water ingress & as such we strongly recommend that the environment in which the luminaire is to be installed is suitably checked.
- If the above advice is not taken and the luminaires are subject to water ingress, Signify cannot guarantee safe failure & product warranty will become void.