

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P36G16M-XYZ	SEE SHEET 2

**SPECIFICATION:**

- |                      |                                   |
|----------------------|-----------------------------------|
| 1. STANDARD:         |                                   |
| UNIT TYPE:           | MONITORED & SWITCHED PER OUTLET   |
| ORIENTATION:         | VERTICAL, 0U FULL, WIDE           |
| OUTLET QTY & TYPE:   | (24) C13, (12) C19                |
| INPUT VOLTAGE:       | 200-240/346-415VAC                |
| INPUT CURRENT:       | 32A                               |
| BREAKER QTY & TYPE:  | (6) 16AMP, SINGLE-POLE            |
| INPUT PHASE:         | THREE-PHASE WYE                   |
| RATED POWER:         | 22.0kVA                           |
| INPUT PLUG:          | IEC 60309 3P+N+E 6H 32A           |
| INPUT POWER CORD:    | SEE SHEET 2 FOR PART NUMBER TABLE |
| REGULATORY STANDARD: | RoHS COMPLIANT                    |

2. ADDITIONAL:  
NONE
3. ACCESSORIES:  
(1) QUICK-START GUIDE



**NOTES:**

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [ INCHES ] .
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
- VISIT OUR ON-LINE CATALOG AT [WWW.PANDUIT.COM](http://WWW.PANDUIT.COM) FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION


**IDENTIFICATION**

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE


SHEET 2 CONFIGURABLE PART NUMBERS: **P36G16M-XX Y Z**

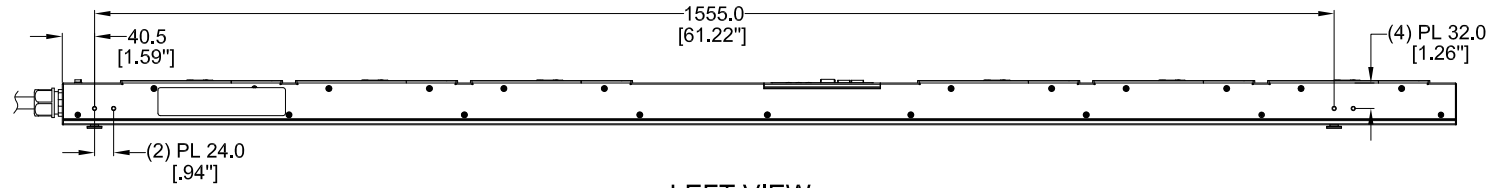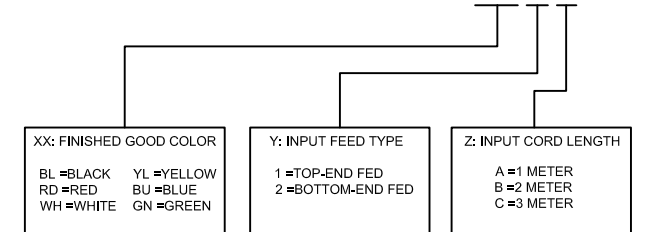


LEFT VIEW

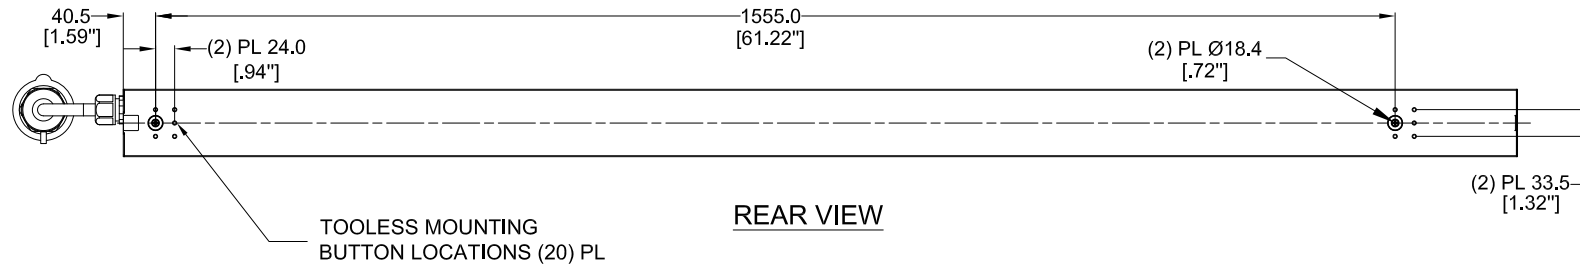


REAR VIEW

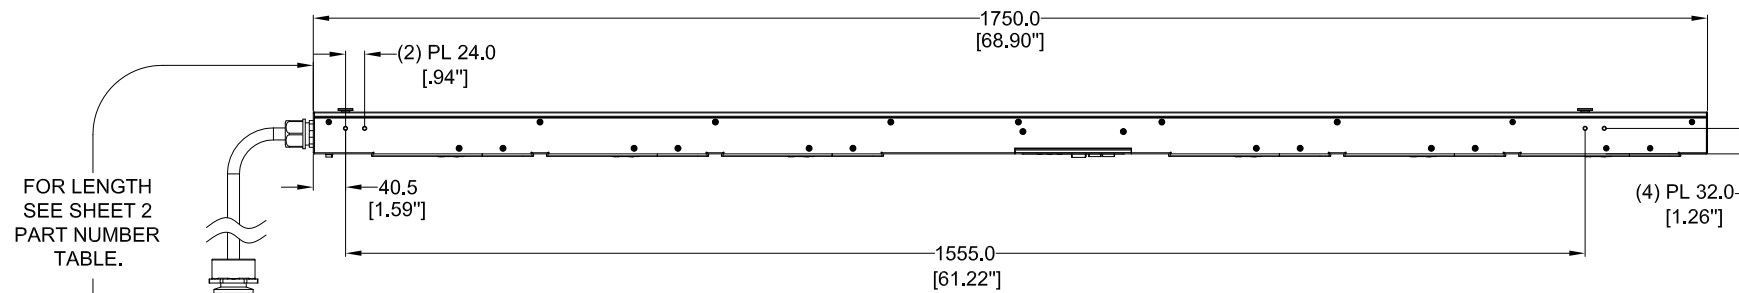

RIGHT VIEW

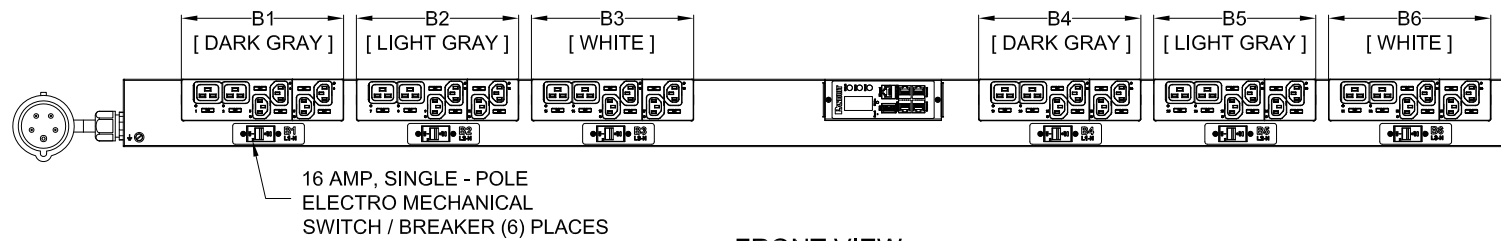

FRONT VIEW



BOTTOM VIEW

**PLUG/RECEPTACLE BLOCK**



**PLUG**  
IEC 60309, 4P 5W, 6H  
IP44 (SPASHPROOF)  
32A, 346-415V MAX RATED INPUT



**RECEPTACLES**  
IEC 60320/C19  
16A, 250V MAX RATED OUTPUT



**RECEPTACLES**  
IEC 60320/C13  
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	JF.YU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P36G16M
01A	09/11/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P36G16M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE: INTELLIGENT SERIES PDU P36G16M-XYZ CUSTOMER DRAWING		
ITEM REVISION NAME:		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		N/A
THIRD ANGLE PROJECTION		DRAWING NUMBER: P36G16M_DC
DRAWN BY: GEORGE	DATE: 09/11/2017	CHK: SEAN
SCALE: NONE	SHT 1 OF 2	
		SCALE: B

