


## DS-1273ZJ-160

Wall Mounting Bracket for Dome Camera

### Features:

- Aluminum alloy material with surface spray treatment
- Design with cable entry hole
- Better water proof design
- Convenient installation coordinating with cap

### Dimension:

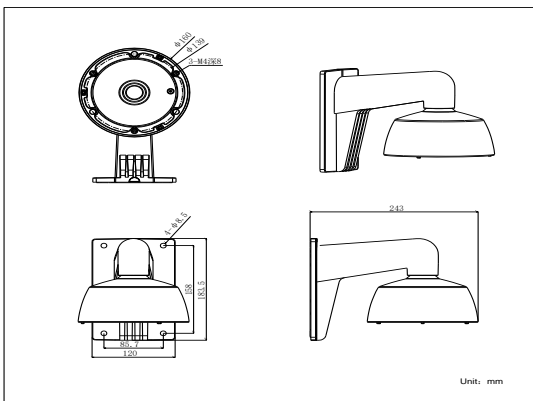

### Order Model:

DS-1273ZJ-160



### Parameter:

Model	DS-1273ZJ-160
Parameters	Wall Mounting Bracket for Dome Camera
Appearance	Hikvision White
Range of Application	Suitable for dome camera wall mounting
Material	Aluminum Alloy
Dimension	Φ 160 × 183.5 × 243mm
Weight	845g

### Notice:


- The bracket is for dome camera
- Pay attention to color matching
- The bracket should be installed on flat wall
- The wall must be capable of supporting over 3 times as much as the total weight of the camera and the mount.
- The maximum load capacity of the bracket is 4.5KG

### Model Suitable:

DS-2CD72XXF-E(I)Z(H)(S), DS-2CD72X3PF-E(I)Z(H)(S), DS-2CD72X3NF-E(I)Z(H)(S), DS-2CD7293PFW-D-E(I)Z(H)(S), DS-2CD7293NFW-D-E(I)Z(H)(S), DS-2CD72X4FWD-E(I)Z(H)(S), DS-2CD4312F(WD)-(I)Z(H)(S), DS-2CD4324F-(I)Z(H)(S), DS-2CD4332FWD-(I)Z(H)(S)


### Installation Step:

- ① Choose the appropriate wall to install the bracket and wiring




A: Cable entry hole

- ② Complete wiring and bracket installation and screw up the cap




- ③ Fix the connection between bracket and cap with fastening screw




B: Fastening screw


- ④ Take off the lower dome and inner module and base




- ⑤ Complete wiring and fix module to cap




- ⑥ Fix the dome module and adjust the view angle



- ⑦ Install lower dome to cap and screw up



- ⑧ Installation complete



**Note:** The actual bracket may vary from the picture above.