


Part number

PE 3265 SV



Mobile plug, PLUSO series, 3 poles + N + PE, 6 h (red), 32 A, 380 ÷ 415 V, straight

Product description		Material properties	
Product type	Plug Mobile	Colour	RAL 7035 grey, RAL 3000 red
Series	PE...SV, PLUSO	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
Connection type	Screw terminal connection	China RoHs - EFUP	50
N. of poles	3 poles + N + 	REACH SVHC substances	Yes Lead
Clock position	6	SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade
Specification	Straight	Approvals / Standards	
Technical data		Reference standard	EN 60309-1 and -2
Current	32 A	General ordering information	
Voltage	380 ÷ 415 V	EAN13 code	8015747067591
IP degree of protection	IP44	Packaging Information	
Further technical details		Packaging length	310,00 mm
Weight	235,00 g	Packaging height	260,00 mm
Operating temperature range (min, max)	-25°C ... +40°C	Packaging width	325,00 mm
		Packaging weight	4,80 kg
		Packaging volume	26,20 dm ³
		Packaging description	Carton box
		Packaging quantity	20 Pcs
		Packaging EAN code	8015747067607


Part number

PE 3265 SV



Catalogue drawings

(16 / 32A) PE ... SV

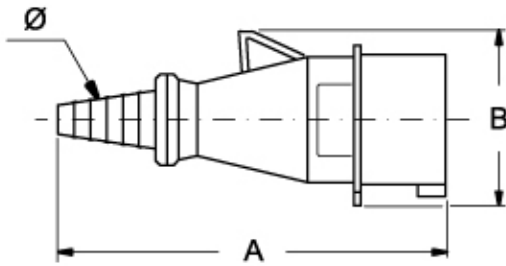

PE ... SV	A	B	Ø min	Ø max	
16A 2P+⊕	143,5	59	7	17	
	3P+⊕	148,5	66	7	17
	3P+N+⊕	167,5	75	9	22
32A 2P+⊕	187	80	9	22	
	3P+⊕	187	80	9	22
	3P+N+⊕	192,5	87	9	22

Notes

Dimensions shown in mm are not binding and may be changed without notice.