

# SUNSET



Corps aluminium/Verre de protection. Alimentation intégrée. Précâblage 1,5 m.

		12 LED	38W
--	--	--------	-----

	230V	IP65	IK08	850°	30 000 h
--	------	------	------	------	----------

Lumens	Teinte	Couleur	Code
--------	--------	---------	------

### ◁25°


2800		3000 K	blanc	<b>50281</b>
3200		4000 K	blanc	<b>50279</b>
2800		3000 K	noir	<b>50282</b>
3200		4000 K	noir	<b>50280</b>

### ◁50°

2600		3000 K	blanc	<b>50247</b>
3000		4000 K	blanc	<b>50242</b>
2600		3000 K	noir	<b>50248</b>
3000		4000 K	noir	<b>50243</b>

### ◁50° x 140° elliptique

	2800		3000 K	blanc	<b>50302</b>
	3200		4000 K	blanc	<b>50303</b>
	2800		3000 K	noir	<b>50304</b>
	3200		4000 K	noir	<b>50305</b>



SUNSET	3000 K	38 W	25°
	<b>h (m)</b>	<b>E<sub>max</sub> (lx)</b>	<b>d (m)</b>
	1	11041	0,44
	3	1227	1,3
	5	442	2,2
	7	225	3,1
	9	136	4,0

SUNSET	4000 K	38 W	25°
	<b>h (m)</b>	<b>E<sub>max</sub> (lx)</b>	<b>d (m)</b>
	1	12614	0,44
	3	1402	1,3
	5	505	2,2
	7	257	3,1
	9	156	4,0

SUNSET	3000 K	38 W	50°
	<b>h (m)</b>	<b>E<sub>max</sub> (lx)</b>	<b>d (m)</b>
	1	2857	0,93
	3	317	2,8
	5	114	4,7
	6	79	5,6
	7	58	6,5

SUNSET	4000 K	38 W	50°
	<b>h (m)</b>	<b>E<sub>max</sub> (lx)</b>	<b>d (m)</b>
	1	3299	0,93
	3	367	2,8
	5	132	4,7
	6	92	5,6
	7	67	6,5

# DAY LED




Corps aluminium/Verre de protection. Peinture Epoxy. Ailettes de refroidissement. Boîte de connexion.

		48 LED	20W
--	--	--------	-----

	230V	IP30 IP33	IK02	850°	50 000 h
--	------	--------------	------	------	----------

Lumens	Teinte	Couleur	Code
--------	--------	---------	------

2100		3000 K	blanc	<b>50099</b>
2100		3000 K	noir	<b>50103</b>
2400		4000 K	blanc	<b>50094</b>
2400		4000 K	beige	<b>50095</b>
2400		4000 K	noir	<b>50096</b>

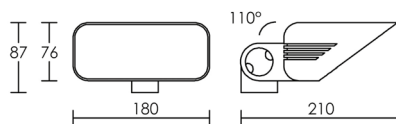

DAY LED 3000K	20W	120°	
	<b>h (m)</b>	<b>E (lx)</b>	<b>d (m)</b>
	1	819	3,30
	2	205	6,6
	3	91	9,9
	4	51	13,2
	7	17	23,1

DAY LED 4000K	20W	120°	
	<b>h (m)</b>	<b>E (lx)</b>	<b>d (m)</b>
	1	936	3,30
	2	234	6,6
	3	104	9,9
	4	59	13,2
	7	19	23,1



APPLIQUE