



Product Description:

Le kit de ruban LED FlexE240™ est idéal pour les applications intérieures et extérieures. Chaque longueur est enfermée dans une enveloppe de silicone flexible IP65 pour une protection maximale contre les intempéries. Connexion possible jusqu'à 30 mètres afin de répondre au maximum d'applications comme pour les jardins ou corniches. Disponible en kit de deux dimensions et en plusieurs couleurs 3000K, 4000K, bleu et RGB.

Product Image:

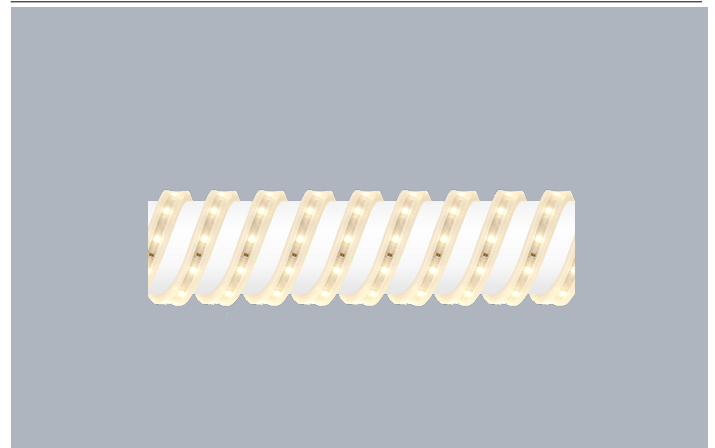

Line Drawing

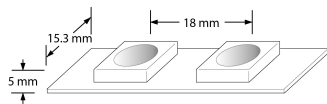

Product Specs:

Technology	LED	Input Voltage	220-240V AC
Lamp Base	Aucun	Positional Adjustment	Fixe
Number of LEDs	60	Lifetime L70 (hrs)	25.000
Input Frequency	50/60HZ	Dimmable	Non
IP Rating	IP65	Operating Env. Temp. (Min) °C	-20°C
Operating Env. Temp. (Max) °C	40°C	Power Factor	0.9
Height (mm)	5	Length (mm)	2000
Width (mm)	15.3	Weight (Kg)	0.184

SKU Table and Ordering:

SKU Code	Wattage	Beam Angle	Lumens	Lumens/Watt	CRI	Colour	Finish Colour
EN-STKM2/30	24	120	1400	59	80	3000	Blanc
EN-STKM2/40	24	120	1400	59	80	4000	Blanc
EN-STKM2/BLU	24	120			80		Blanc
EN-STKM2/RGB	24	120			80		Blanc

Compliance & Approvals:



Warranty:

This product has a guarantee period of . Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.

UK Head Office
Apex Park
6 Little Burrow
Welwyn Garden City AL7 4SW
United Kingdom
Tel : +44 (0) 1707 228 700