


2


1

PANDUIT P/N	WEIGHT
P48B45M	8.9kg

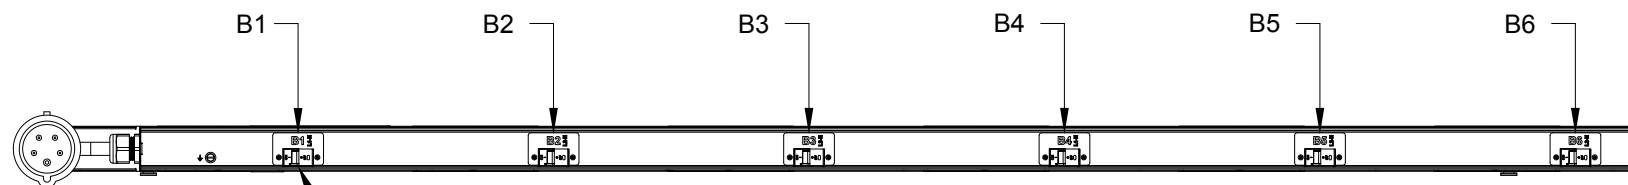


REAR VIEW


16 AMP, SINGLE - POLE ELECTRO MECHANICAL SWITCH / BREAKER (6) PLACES

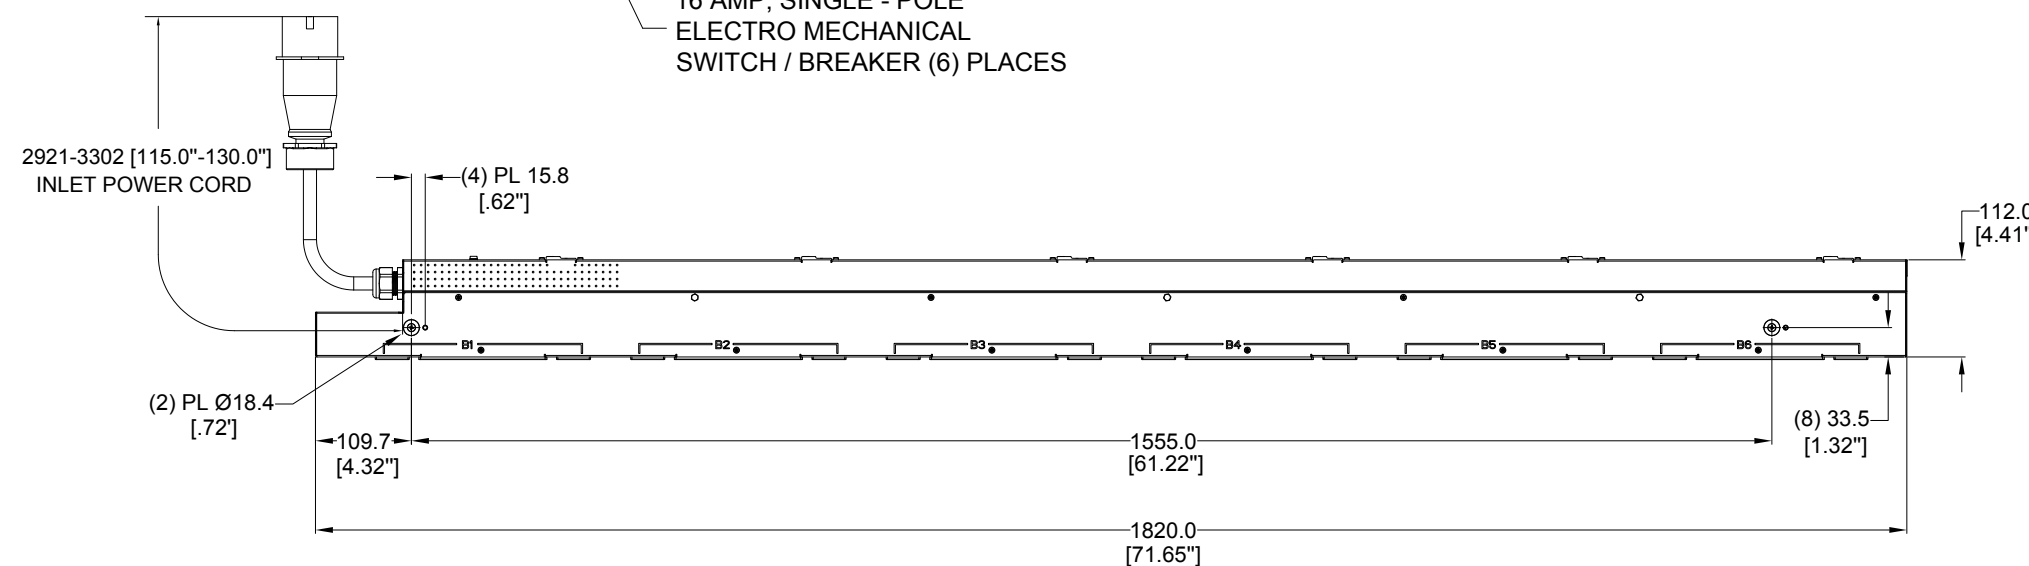

TOP VIEW

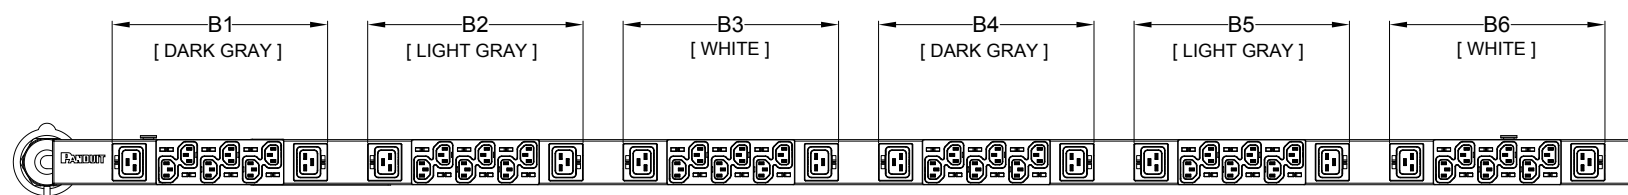


FRONT VIEW

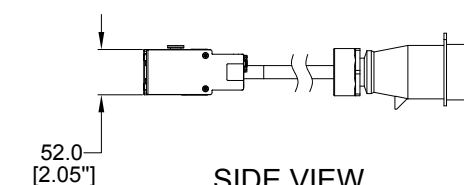


SIDE VIEW

NOTES:


- IDENTIFICATION:
  - UNIT TYPE: BASIC
  - ORIENTATION: VERTICAL, 0U FULL, 2-SIDED
  - OUTLET QTY&TYPE: (36) C13 AND (12) C19
  - BREAKER QTY&TYPE: (6) 16A, SINGLE-POLE
  - INPUT VOLTAGE: 200-240/346-415VAC, WYE
  - INPUT CURRENT: 32A
  - INPUT PHASE: THREE-PHASE WYE
  - RATED POWER: 22.0kVA
  - INPUT PLUG: IEC 60309 3P+N+E 6H 32A
  - INPUT CORD LENGTH: 3m [10']
- ACCESSORIES:
  - POCKET GUIDE
- RoHS COMPLIANT
- VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- MAXIMUM ALLOWABLE INPUT POWER = 8.6kW
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES



PLUG  
32 AMP, 230/400V x 3~ WYE  
4P/5W  
IEC 60309, SPLASHPROOF, IP44  
2P (S); 4T (W), 6H;



TWELVE (12)  
RECEPTACLES  
16 AMP, 250V  
STRAIGHT BLADE  
IEC 60320/C19

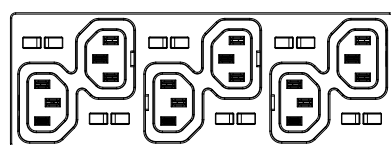

THIRTY-SIX (36)  
RECEPTACLES  
10 AMP, 250V  
STRAIGHT BLADE  
IEC 60320/C13

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01B	08/21/2017	KUN	MIM	EDM	REVISED TOLERANCES	P48B45M
01A	06/28/2017	KUN	MIM	EDM	INITIAL RELEASE	P48B45M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE: BASIC SERIES PDU P48B45M CUSTOMER DRAWING		
ITEM REVISION NAME:		<b>PANDUIT</b>
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A
Tolerance(mm) 04<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER: P48B45M_DC
THIRD ANGLE PROJECTION	DRAWN BY: KUN DATE: 05/24/2017 CHK: SEAN SCALE: NONE	SHT 1 OF 1 SCALE: B

2

1