


Part number

# PHW 12564 PV



Mobile socket outlet, PLUSO HEAVY DUTY series, 3 poles + PE, 6 h (red), 125 A, 380 ÷ 415 V

#### Product description

|                       |                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------|
| <b>Product type</b>   | Socket<br>Mobile                                                                            |
| <b>Series</b>         | PHW...PV, PLUSO HEAVY DUTY                                                                  |
| <b>N. of poles</b>    | 3 poles +  |
| <b>Clock position</b> | 6                                                                                           |

#### Technical data

|                                |             |
|--------------------------------|-------------|
| <b>Current</b>                 | 125 A       |
| <b>Voltage</b>                 | 380 ÷ 415 V |
| <b>IP degree of protection</b> | IP66 / IP67 |

#### Further technical details

|                                               |                  |
|-----------------------------------------------|------------------|
| <b>Weight</b>                                 | 0,00 g           |
| <b>Operating temperature range (min, max)</b> | -40°C ... +100°C |

#### Material properties

|                              |                                                                                |
|------------------------------|--------------------------------------------------------------------------------|
| <b>Colour</b>                | RAL 7012 grey, RAL 3000 red                                                    |
| <b>RoHs conformity</b>       | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| <b>China RoHs - EFUP</b>     | 50                                                                             |
| <b>REACH SVHC substances</b> | Yes<br>Lead                                                                    |
| <b>SCIP number</b>           | Ca7de37f-add8-4b77-9861-279c94903ade                                           |

#### Approvals / Standards

|                           |                   |
|---------------------------|-------------------|
| <b>Reference standard</b> | EN 60309-1 and -2 |
|---------------------------|-------------------|

#### General ordering information

|                   |               |
|-------------------|---------------|
| <b>EAN13 code</b> | 8015747144513 |
|-------------------|---------------|

#### Packaging Information

|                                  |                       |
|----------------------------------|-----------------------|
| <b>Packaging length</b>          | 330,00 mm             |
| <b>Packaging height</b>          | 170,00 mm             |
| <b>Packaging width</b>           | 230,00 mm             |
| <b>Packaging volume</b>          | 12,90 dm <sup>3</sup> |
| <b>Packaging description</b>     | Carton box            |
| <b>Packaging quantity</b>        | 2 Pcs                 |
| <b>Packaging EAN code</b>        | 8015747274944         |
| <b>Sub-packaging description</b> | Carton box            |
| <b>Sub-packaging quantity</b>    | 1 Pcs                 |
| <b>Sub-packaging EAN barcode</b> | 8015747144650         |


Part number

# PHW 12564 PV



## Catalogue drawings

(63 / 125A) PHW ... PV

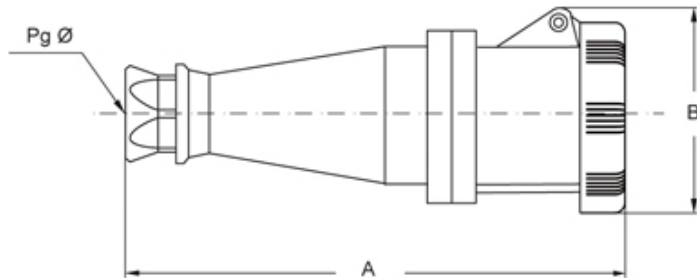

| PHW...PV  | A   | B     | Pg ø  |
|-----------|-----|-------|-------|
| 63A 2P+⊕  | 277 | 108,5 | 36    |
| 3P+⊕      | 277 | 108,5 | 36    |
| 3P+N+⊕    | 277 | 108,5 | 36    |
| 125A 2P+⊕ | 324 | 120,5 | 2"gas |
| 3P+⊕      | 324 | 120,5 | 2"gas |
| 3P+N+⊕    | 324 | 120,5 | 2"gas |

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Temperature range: from -40 °C to +100 °C
- Compliant with EN 60309-1 and -2
- Enclosure, insert and locking ring in insulating, thermoplastic, self-extinguishing material
- PHW...PV types (IP66/IP67), RAL 9005 black enclosure, locking ring with gasket colour coded according to the operating voltage, entry with cable gland
- Terminals with retained screws
- Stainless steel insert fixing screws
- Nickel-plated contacts as standard