

| | | | | |
|---|----------|----|------|---|
| Product designation | | | | Enclosed rotary cam switch |
| Product type designation | | | | GX16 |
| General characteristics | | | | |
| Switching diagram | | | | 110 - Multi-step 0-1-2-3-4-5 1 pole |
| N° of elements | | | | 3 |
| Mounting form | | | | P - Plastic enclosure with black handle |
| Contact characteristics | | | | |
| Rated insulation voltage U_i | IEC/EN | V | 690 | |
| | UL/CSA | V | 600 | |
| Rated impulse withstand voltage U_{imp} | | kV | 6 | |
| Conventional free air thermal current I_{th} | IEC/EN | A | 16 | |
| | UL/CSA | A | 12 | |
| Rated operational voltage | | V | 440 | |
| Rated operational impulse voltage | | kV | 4 | |
| Maximum fuse size for short-circuit protection I_n (gG) | 10kA | A | 16 | |
| | 15kA | A | 16 | |
| | 25kA | A | 16 | |
| Rated short time current I_{cw} | 1s | A | 250 | |
| Conductivity | | | | 10/5 mA/V |
| Operational current I_e IEC/EN | | | | |
| AC1/AC21A | | A | 16 | |
| AC15 | 110V | A | 10 | |
| | 220/230V | A | 8 | |
| | 380/400V | A | 4 | |
| | 660/690V | A | 1.5 | |
| Rated operational power in AC | | | | |
| Three-phase AC-3 | 220/230V | kW | 3.5 | |
| | 380/440V | kW | 4.5 | |
| | 500/690V | kW | 5.5 | |
| Single-phase AC-3 | 110V | kW | 0.55 | |
| | 220/230V | kW | 1.5 | |
| | 380/440V | kW | 2.2 | |
| Three-phase AC23A | 220/230V | kW | 3.7 | |
| | 380/440V | kW | 6.5 | |
| | 500/690V | kW | 7.5 | |
| Single-phase AC23A | 110V | kW | 0.75 | |
| | 220/230V | kW | 1.8 | |
| | 380/440V | kW | 3 | |

Rated operational current in DC
DC21A

| | | |
|------|---|------|
| 48V | A | 16 |
| 60V | A | 16 |
| 110V | A | 4 |
| 220V | A | 0.6 |
| 440V | A | 0.25 |

DC23A (poles in series)

| | | |
|------|---|--------|
| 24V | A | 16 (1) |
| 48V | A | 16 (2) |
| 60V | A | 16 (3) |
| 110V | A | 10 (3) |
| 220V | A | 7 (4) |

DC13

| | | |
|------|---|------|
| 24V | A | 16 |
| 48V | A | 14 |
| 60V | A | 10 |
| 110V | A | 1 |
| 220V | A | 0.4 |
| 440V | A | 0.15 |

| | | |
|-------------------|---|-----|
| Power dissipation | W | 0.6 |
|-------------------|---|-----|

Mechanical features

| | | |
|-----------------|--|----|
| Terminals screw | | 3M |
|-----------------|--|----|

| | | |
|-------------------------------------|----|-----|
| Tightening torque for terminals max | Nm | 0.5 |
|-------------------------------------|----|-----|

Conductor size

AWG - Rigid cable

| | | |
|-----|-----|----|
| min | AWG | 20 |
| Max | AWG | 12 |

AWG - Flexible cable

| | | |
|-----|-----|----|
| min | AWG | 20 |
| Max | AWG | 12 |

Conductor size (IEC) - Flexible cable

| | | |
|-----|-----------------|-----|
| min | mm ² | 0.5 |
| Max | mm ² | 2.5 |

Conductor size (IEC) - Rigid cable

| | | |
|-----|-----------------|-----|
| min | mm ² | 0.5 |
| Max | mm ² | 2.5 |

| | | |
|-----------------|--------|-------------------|
| Mechanical life | cycles | 1X10 ⁶ |
|-----------------|--------|-------------------|

UL technical data

Motor power for direct-on-line control

for three-phase motor

| | | |
|------|----|-----|
| 120V | HP | 1.5 |
| 240V | HP | 3 |
| 480V | HP | 5 |
| 600V | HP | 5 |

for single-phase motor

| | | |
|------|----|------|
| 120V | HP | 0.75 |
| 240V | HP | 1 |

Ambient conditions

Temperature

Operating temperature

| | | |
|-----|----|-----|
| min | °C | -25 |
| max | °C | +55 |


Storage temperature

min °C -40
max °C +70

Resistance & Protection


| | |
|---------------------|------|
| Frontal IP degree | IP65 |
| Terminals IP degree | IP20 |

Dimensions

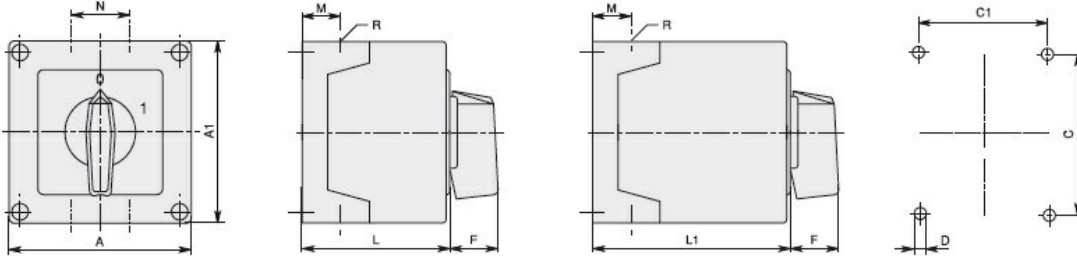

| | | | | | | | | | | | | | | | |
|------|---------|-----|-----|-----|-----|------|----|-----|----|----|------|------|-------|--------|------|
| GX16 | 90x90 | 1-2 | 3-5 | 90 | 90 | 79 | 79 | 4.5 | 25 | 19 | 30 | 71.3 | 98.3 | 4xPG16 | IP65 |
| GX20 | | 1-2 | 3-5 | | | | | | | | | | | | |
| GX16 | 110x110 | 1-3 | 4-7 | 110 | 110 | 98.4 | 83 | 4.5 | 32 | 21 | 39.5 | 85.5 | 119.5 | 4xPG21 | IP65 |
| GX20 | | 1-3 | 4-7 | | | | | | | | | | | | |
| GX32 | | 1-2 | 3-4 | | | | | | | | | | | | |
| GX40 | | 1-2 | 3-4 | | | | | | | | | | | | |

Wiring diagrams



| | | | | | |
|---|---|---|---|---|---|
| 0 | | | | | |
| 1 | X | | | | |
| 2 | | | X | | |
| 3 | | | | | X |
| 4 | | X | | | |
| 5 | | | | X | |

110

Certifications and compliance

Compliance

- IEC/EN/BS 60947-1
- IEC/EN/BS 60947-3
- IEC/EN/BS 60947-5-1
- IEC/EN/BS 61058-1

Certificates

EAC

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete