

Whitelux Plus Lamps

Description: HIT 1000W/U/LU/740

Performance Data



Rated Light Output (Lumens @ 100 hours)	90000
Lamp Lumens per Watt (100hrs)	90
Rated Life (Hrs @ 10Hr./Start)	8000
Correlated Colour Temperature (K)	4000
Chromaticity (CIE - X Y)	385,390
Colour Rendering Index (CRI) or (Ra)	68
Typical Warm Up Time (Minutes)	3-5
Typical Hot Restart Time (Minutes)	10-15
Burning Position	Universal
S/P (Multiplier)	1.7

Physical Data


Base Designation	E40
Bulb Designation	T76
Bulb Diameter (mm)	76
Max. Overall Length (mm)	340
Light Centre Length (mm)	220
Effective Arc Length (mm)	80
Max. Base Temperature (°C)	250
Max. Bulb Temperature (°C)	525
Luminaire Type	Enclosed
Socket Pulse Rating (KV)	5
Mercury Content (mg)	45.0

Lamp Electrical Data

Nominal Lamp Wattage (W)	1000
Lamp Operating Voltage (V)	105
Lamp Operating Current (A)	9.5
Min. Open Circuit Voltage (RMS)	198
Min. Starting Pulse (Peak V)	3500-5000
Min. Pulse Width (Microseconds)	1 @2700V
Min. Pulse Rate Per ½ cycle	1
Pulse Position (Electrical Degrees)	60-90, 240-270

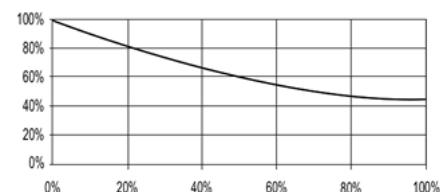

Lumen Maintenance (Light Output vs. Rated Life)

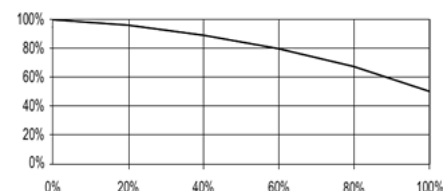

Lamp Mortality (Survivors vs. Rated Life)

Whitelux Plus Lamps

Notes:

Lamp data is based on vertical operation. For horizontal operation lumen output will be reduced by 10% and lamp life reduced by 25%.

This Product Specification contains data about typical performance at nominal power. Actual values may depend on ballast and applications. Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives.