


Part number

PN 1663 SV



Mobile plug, PLUSO LS-TYPE series, 2 poles + PE, 6 h (blue), 16 A, 200 ÷ 250 V, straight

Product description		Material properties	
Product type	Plug Mobile	Colour	RAL 9005 black
Series	PN...SV, PLUSO LS-TYPE	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	2 poles + 	China RoHs - EFUP	50
Clock position	6	REACH SVHC substances	Yes Lead
Specification	Straight	SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade
Technical data		Approvals / Standards	
Current	16 A	Reference standard	EN 60309-1 and -2
Voltage	200 ÷ 250 V	General ordering information	
IP degree of protection	IP44	EAN13 code	8015747079853
Further technical details		Packaging Information	
Weight	101,70 g	Packaging length	400,00 mm
Operating temperature range (min, max)	-25°C ... +40°C	Packaging height	300,00 mm
		Packaging width	400,00 mm
		Packaging weight	10,59 kg
		Packaging volume	48,00 dm ³
		Packaging description	Carton box
		Packaging quantity	100 Pcs
		Packaging EAN code	8015747080521


Part number

PN 1663 SV



Catalogue drawings

(16A) PN ... SV

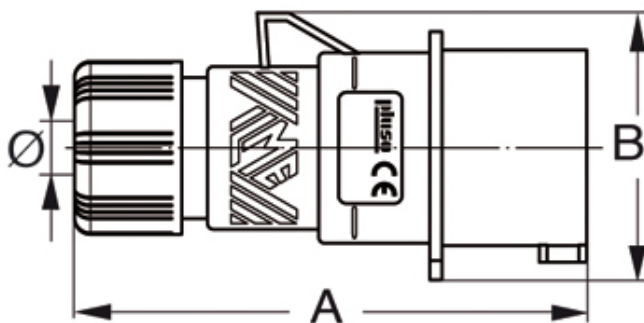

PN...SV	A	B	Ø min	Ø max
16A 2P+⊕	129	59,5	7	16
3P+⊕	129	67	7	16
3P+N+⊕	129	75	8	24

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- PN...SV types 16A (IP44), entry with cable gland colour RAL 9005 black, enclosure colour RAL 9005 black
- PN...PV types 16A (IP44), enclosure and spring lid colour RAL 9005 black, entry with cable gland
- Compliant with EN 60309-1 and -2
- PN...SV types, enclosure and insert in insulating, thermoplastic, self-extinguishing material
- PN...PV types, enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- Terminals with retained screws
- IP44 degree of protection (EN 60529)