


CR1616

Model	CR1616
System	Manganese dioxide–Li/Organic Electrolyte
Nominal Voltage (V)	3
Nominal Capacity (mAh)*	55
Nominal Discharge Current (mA)	0.1
Weight (g)**	1.1
Dimensions (mm)**	
Diameter	16.0
Height	1.6
UL Recognition	MH12568

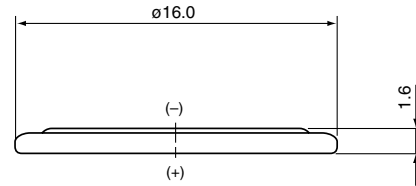


Available Terminals and Wire Connectors


Check http://www.maxell.co.jp/e/products/industrial/battery/pdf/cr1616tw_e.pdf for diagrams of batteries with terminals.

Characteristics


● Discharge Characteristics

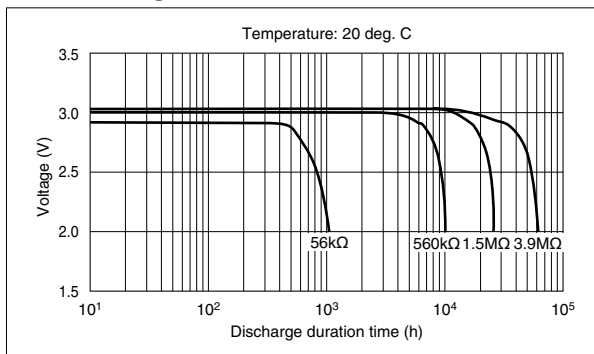


● Temperature Characteristics

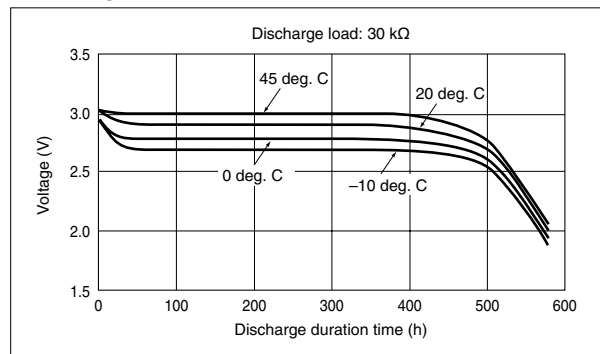

● Pulse Discharge Characteristics

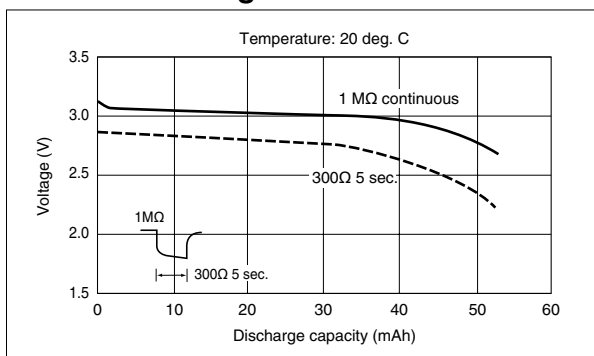

● Relationship between Discharge Current and Discharge Capacity

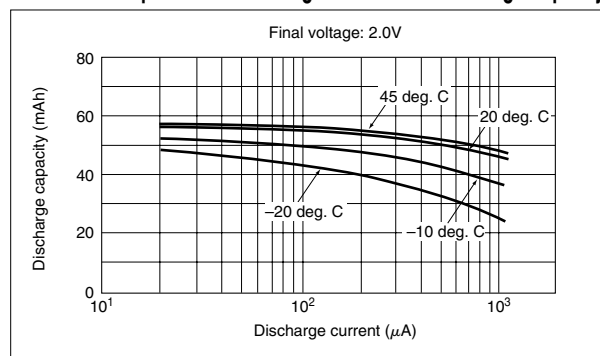

* Nominal capacity indicates duration until the voltage drops down to 2.0V when discharged at a nominal discharge current at 20 deg. C.
 ** Dimensions and weight are for the battery itself, but may vary depending on the shape of terminals or other factors.