
QUICK CONNECT SURGE SUPPRESSOR FOR BG... SERIES MINI-CONTACTORS, ≤48VAC (RESISTOR-CAPACITOR)




Contact characteristics

| Tightening torque for terminals | | | | |
|-------------------------------------|-----|------|---|--|
| | min | lbin | 9 | |
| | max | lbin | 9 | |
| Tightening torque for coil terminal | | | _ | |
| | min | lbin | 9 | |
| | max | Ibin | 9 | |

Dimensions

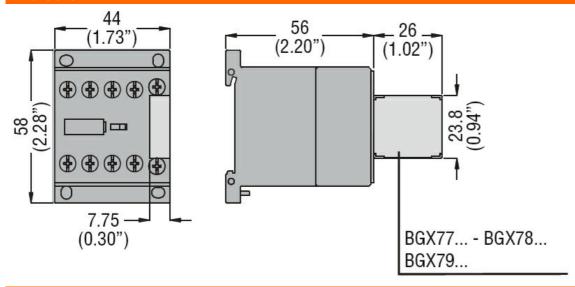

Wiring diagrams

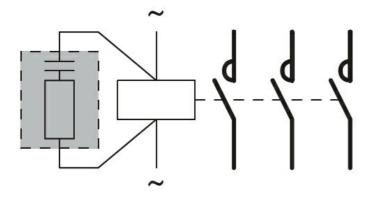

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

IEC/EN 60947-1

UL 60947-1

Certificates

cULus

EAC

ETIM classification



11BGX79048

QUICK CONNECT SURGE SUPPRESSOR FOR BG... SERIES MINI-CONTACTORS, \leq 48VAC (RESISTOR-CAPACITOR)

ETIM 8.0

EC002565 -Filter circuit coil for low-voltage