

Part number

# M7P 24.25



Surface mounting housing, V-TYPE series, with 2 levers, M25 cable entry, size "104.27"

#### Product description

|                     |                          |
|---------------------|--------------------------|
| <b>Product type</b> | Surface mounting housing |
| <b>Series</b>       | V-TYPE                   |
| <b>Closing type</b> | With 2 levers            |
| <b>Size</b>         | Size 104.27              |
| <b>Cable entry</b>  | With cable entry<br>M25  |

#### Technical data

**IP degree of protection** IP66 / IP67 / IP69

#### Further technical details

|   |                |
|---|----------------|
| <b>Weight</b>                                 | 390,00 g       |
| <b>Operating temperature range (min, max)</b> | -40°C...+125°C |

#### Material properties

|                              |                                       |
|------------------------------|---------------------------------------|
| <b>Other materials</b>       | Lever: Stainless steel<br>Gasket: NBR |
| <b>Colour</b>                | RAL 7040 grey                         |
| <b>RoHs conformity</b>       | Compliant                             |
| <b>China RoHs - EFUP</b>     | E                                     |
| <b>REACH SVHC substances</b> | No                                    |

#### Approvals / Standards

|                       |         |
|-----------------------|---------|
| <b>Certifications</b> | DNV, BV |
| <b>UL</b>             | ECBT2   |
| <b>cUL</b>            | ECBT8   |

#### General ordering information

|                   |               |
|-------------------|---------------|
| <b>EAN13 code</b> | 8015747093576 |
| <b>eCl@ss 8.1</b> | 27440202      |
| <b>ETIM 7.0</b>   | EC000437      |

#### Packaging Information

|                                  |                      |
|----------------------------------|----------------------|
| <b>Packaging length</b>          | 300,00 mm            |
| <b>Packaging height</b>          | 160,00 mm            |
| <b>Packaging width</b>           | 180,00 mm            |
| <b>Packaging weight</b>          | 4,16 kg              |
| <b>Packaging volume</b>          | 8,64 dm <sup>3</sup> |
| <b>Packaging description</b>     | Carton box           |
| <b>Packaging quantity</b>        | 10 Pcs               |
| <b>Packaging EAN code</b>        | 8015747250108        |
| <b>Sub-packaging weight</b>      | 2,08 kg              |
| <b>Sub-packaging description</b> | Plastic packaging    |
| <b>Sub-packaging quantity</b>    | 5 Pcs                |
| <b>Sub-packaging EAN barcode</b> | 8015747178327        |


Part number

# M7P 24.25



## Catalogue drawings

C7P - C7AP M7P - M7AP

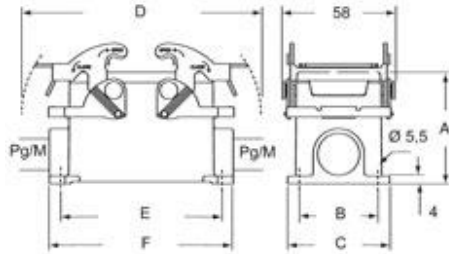

|              | A  | B  | C  | D     | E   | F    |
|--------------|----|----|----|-------|-----|------|
| C7P/M7P 10   | 57 | 40 | 52 | 122   | 82  | 93,5 |
| C7P/M7P 16   | 63 | 45 | 57 | 142,5 | 105 | 117  |
| C7P/M7P 24   | 63 | 45 | 57 | 169   | 132 | 144  |
| C7AP/M7AP 10 | 73 | 45 | 57 | 122   | 82  | 93,5 |
| C7AP/M7AP 16 | 77 | 45 | 57 | 142,5 | 105 | 117  |
| C7AP/M7AP 24 | 80 | 45 | 57 | 169   | 132 | 144  |

## Notes

### C7P/M7P:

Due to the vertical closing movement, the new lever offers an IP66/IP67 protection (according to EN 60529) when fitted with a complete and coupled connector and used with ILME standard hoods in die cast aluminum with pegs (without adaptor).

Dimensions shown in mm are not binding and may be changed without notice.