

Part number

CX 01 YPEM



Male modular insert, Mixo series, crimp connection, 1 PE pole, 2 modules, PE module for earth termination

Product description

Product type	Modular insert
Series	Mixo
Connection type	Crimp connection
Gender	Male
N. of poles	1 PE pole
Size	2 modules
Specification	PE module for earth termination

Technical data

Current	200 A
Rated voltage according to UL/CSA	600 V
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure

Further technical details

Insulation resistance	$\geq 10 \text{ G}\Omega$
Contact resistance	$\leq 0,2 \text{ m}\Omega$
Weight	35,00 g
Operating temperature range (min, max)	-40 °C ... +125 °C
UL 94 flammability rating	V-0

Material properties

Main material	Polycarbonate
Colour	RAL 7032 grey
RoHs conformity	Compliant
China RoHs - EFUP	E
REACH SVHC substances	No

Approvals / Standards

Certifications	CSA, CQC, DNV, BV, EAC
UL	ECBT2
cUL	ECBT8

General ordering information

EAN13 code	8015747168083
eCl@ss 8.1	27440205
ETIM 7.0	EC000438

Packaging Information




Packaging length	112,00 mm
Packaging height	95,00 mm
Packaging width	117,00 mm
Packaging weight	0,23 kg
Packaging volume	1,24 dm ³
Packaging description	Carton box
Packaging quantity	5 Pcs
Packaging EAN code	8015747168427
Sub-packaging weight	0,05 kg
Sub-packaging description	Plastic bag
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747168434

Part number

CX 01 YPEM



Catalogue drawings

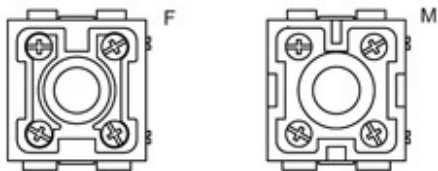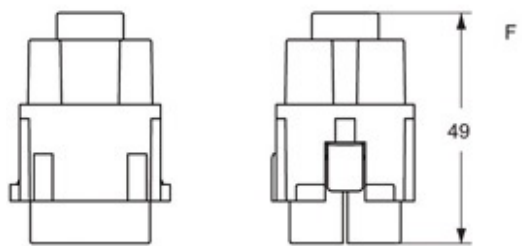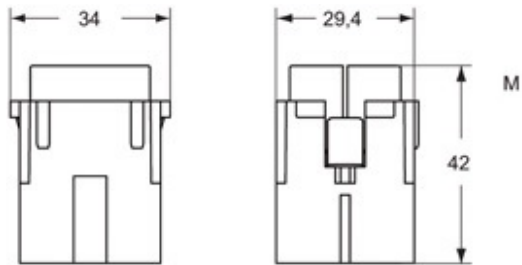

Notes

Standard modular inserts:

-in combination with standard contacts and standard frames (CX ... TF/TM); must be mounted either in traditional enclosures or in COB panel supports (both up to 500 matings).

Dimensions shown in mm are not binding and may be changed without notice.
