



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT P/N	WEIGHT
P24F08M-XXYZ	SEE SHEET 2

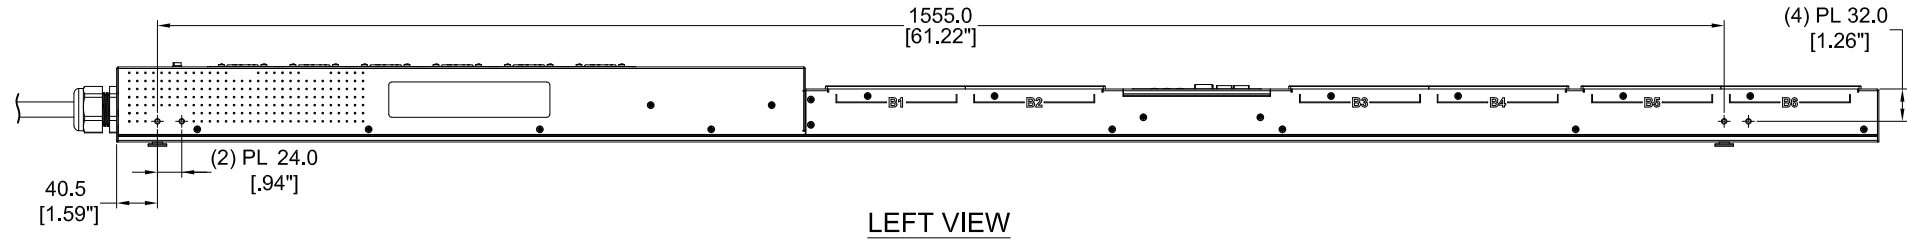


LEFT VIEW

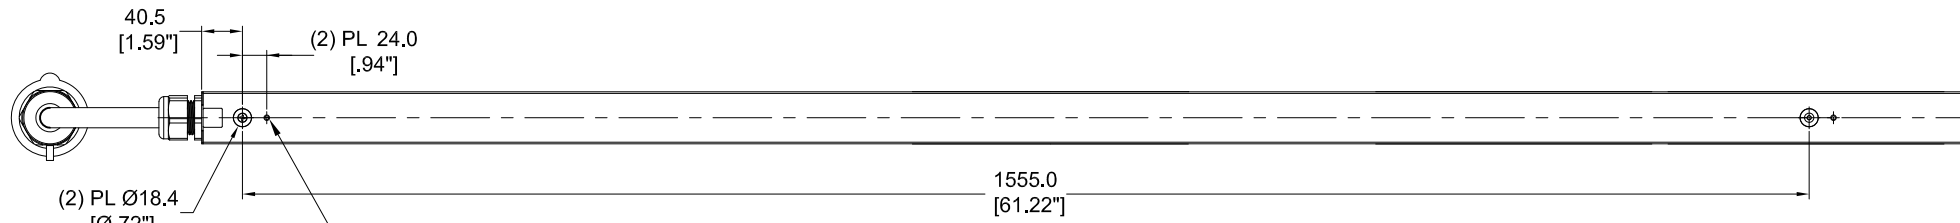

REAR VIEW

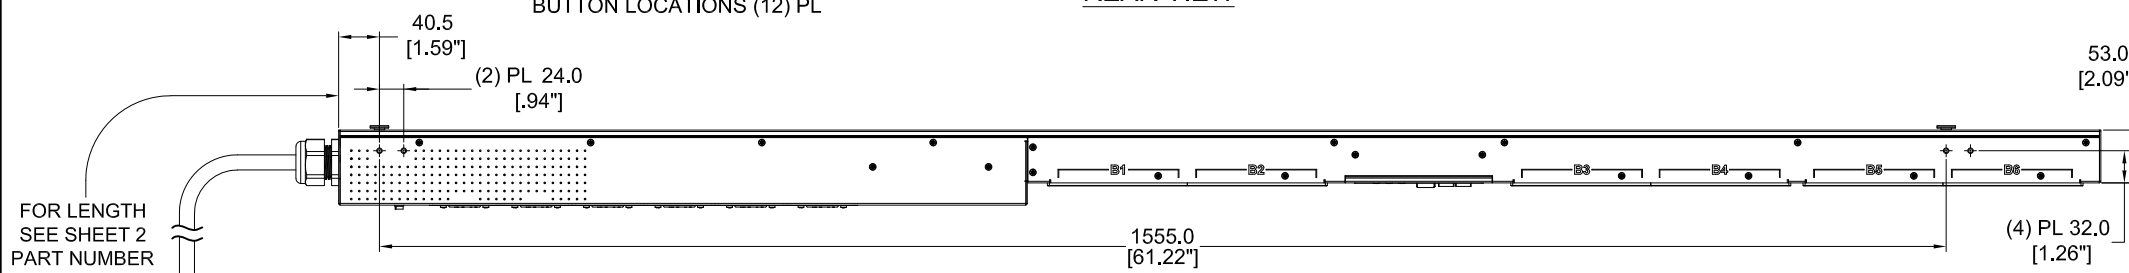

RIGHT VIEW

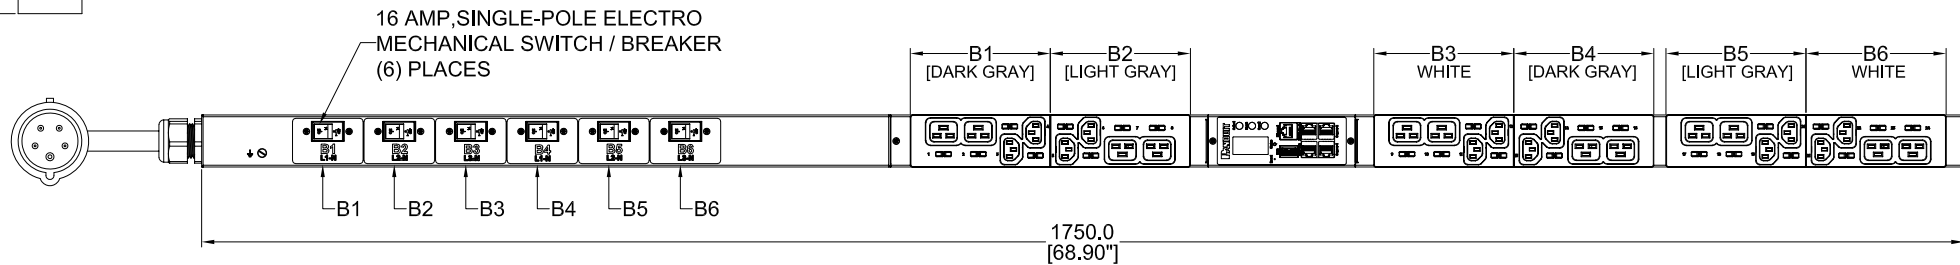

FRONT VIEW

SPECIFICATION:

1. STANDARD:
- | | |
|----------------------|-----------------------------------|
| UNIT TYPE: | MONITORED OUTLET |
| ORIENTATION: | VERTICAL, 0U FULL |
| OUTLET QTY & TYPE: | (12) C13, (12) C19 |
| INPUT VOLTAGE: | 200-240/346-415VAC |
| INPUT CURRENT: | 32A |
| BREAKER QTY & TYPE: | (6) 16AMP, SINGLE-POLE |
| INPUT PHASE: | THREE-PHASE, WYE |
| RATED POWER: | 22.0KVA |
| INPUT PLUG: | IEC 60309 3P+N+E 6H 32A |
| INPUT POWER CORD: | SEE SHEET 2 FOR PART NUMBER TABLE |
| REGULATORY STANDARD: | RoHS COMPLIANT |


2. ADDITIONAL:
NONE
3. ACCESSORIES:
(1) QUICK-START GUIDE

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES] .
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: **P24F08M-XX Y Z**

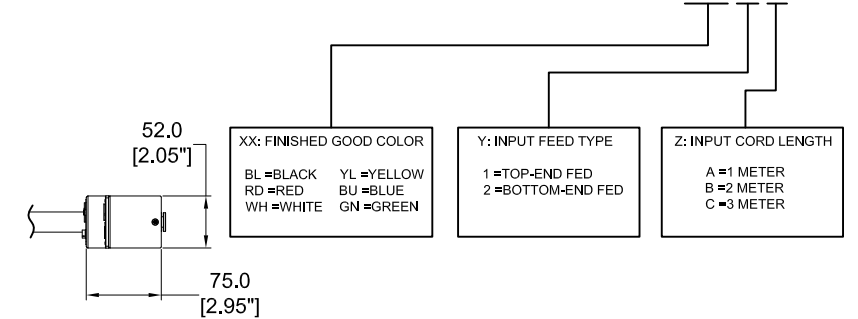

BOTTOM VIEW

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY	SIGN
	DATE
	PRINT

PLUG/RECEPTACLE BLOCK

PLUG
IEC 60309, 4P 5W, 6H
IP44 (SPASHPROOF)
32A, 346 - 415V MAX RATED INPUT

RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT

RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	JF.YU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P24F08M
01B	12/15/2017	WSJ	MIM	EDM	UPDATED DESCRIPTION AND ADDED VIEW	P24F08M
01A	10/09/2017	WSJ	MIM	EDM	INITIAL RELEASE	P24F08M

TITLE: INTELLIGENT SERIES PDU
P24F08M-XXYZ
CUSTOMER DRAWING

ITEM REVISION NAME

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)	
0<L<50	±0.5
50<L<250	±1.0
250<L<500	±1.5
500<L<1000	±2.5
1000<L<2000	±4.0

THIRD ANGLE PROJECTION

MATERIAL/COLOR: N/A

DRAWING NUMBER: P24F08M_DC

DRAWN BY: WSJ DATE: 10/09/2017 CHK: SEAN SCALE: NONE

SHT 1 OF 2

SCALE: B

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P24F08M	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P24F08M-BL1A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	9.5kg
P24F08M-BL1B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.2kg
P24F08M-RD1A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	9.5kg
P24F08M-RD1B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.2kg
P24F08M-RD1C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P24F08M-WH1A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	9.5kg
P24F08M-WH1B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.2kg
P24F08M-WH1C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P24F08M-YL1A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	9.5kg
P24F08M-YL1B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.2kg
P24F08M-YL1C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P24F08M-BU1A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	9.5kg
P24F08M-BU1B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.2kg
P24F08M-BU1C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P24F08M-GN1A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	9.5kg
P24F08M-GN1B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.2kg
P24F08M-GN1C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P24F08M-BL2A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	9.5kg
P24F08M-BL2B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.2kg
P24F08M-BL2C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P24F08M-RD2A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	9.5kg
P24F08M-RD2B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.2kg
P24F08M-RD2C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P24F08M-WH2A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	9.5kg
P24F08M-WH2B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.2kg
P24F08M-WH2C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P24F08M-YL2A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	9.5kg
P24F08M-YL2B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.2kg
P24F08M-YL2C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P24F08M-BU2A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	9.5kg
P24F08M-BU2B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.2kg
P24F08M-BU2C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P24F08M-GN2A	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	9.5kg
P24F08M-GN2B	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.2kg
P24F08M-GN2C	VERTICAL,(12) C13,(12) C19,MONITORED OUTLET,200-240/346-415V/32A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg

B

B

A

A

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN _____
DATE _____
PRINT _____

TITLE
INTELLIGENT SERIES PDU
P24F08M-XXYZ
CUSTOMER DRAWING

ITEM REVISION NAME
DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)
0<L<50 ±0.5
50<L<250 ±1.0
250<L<500 ±1.5
500<L<1000 ±2.5
1000<L<2000 ±4.0

THIRD ANGLE PROJECTION

MATERIAL/COLOR:
N/A

DRAWING NUMBER:
P24F08M_DC

DRAWN BY: WSJ DATE: 10/09/2017 CHK: SEAN SCALE: NONE

SHT 2 OF 2 SCALE: B

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	JF.YU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P24F08M
01B	12/15/2017	WSJ	MIM	EDM	UPDATED DESCRIPTION AND ADDED VIEW	P24F08M
01A	10/09/2017	WSJ	MIM	EDM	INITIAL RELEASE	P24F08M