
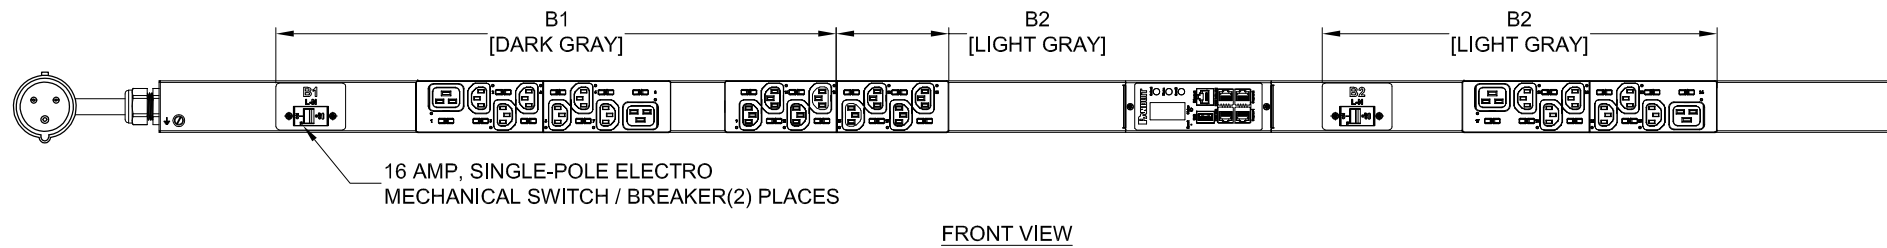
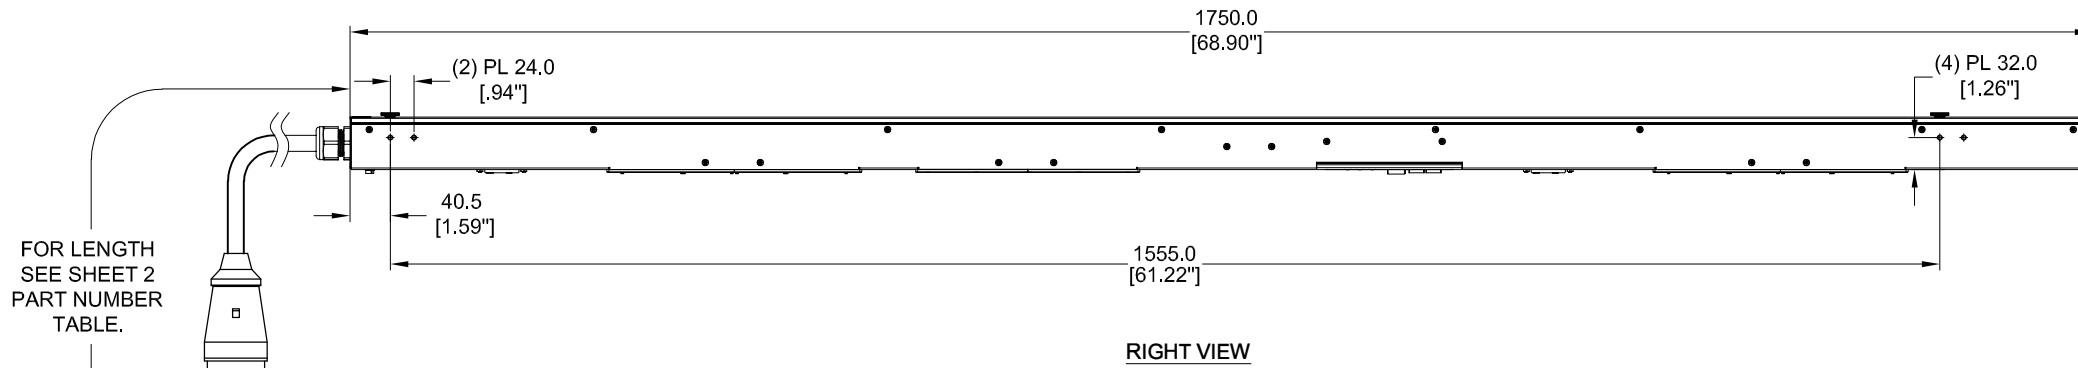
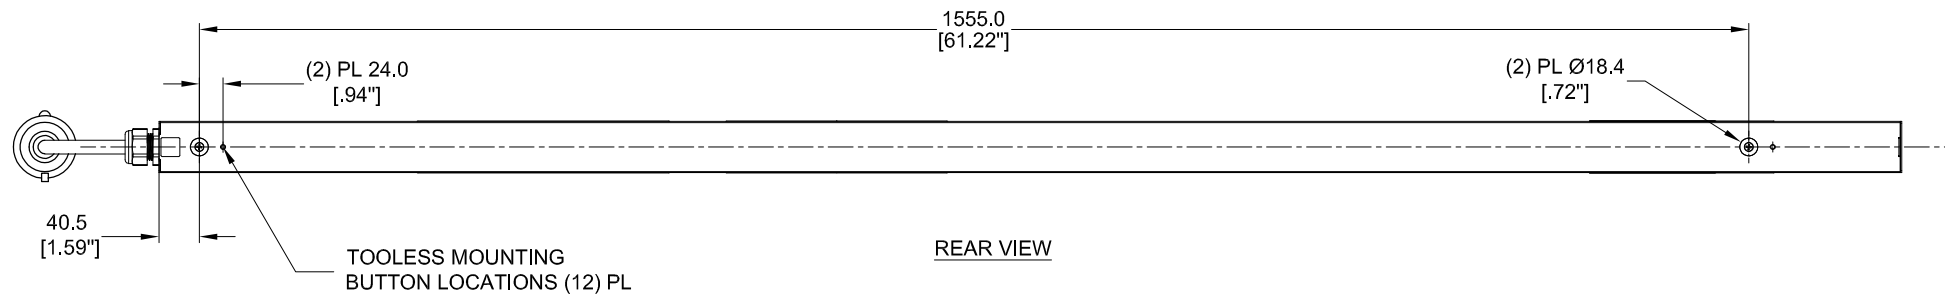


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| | |
|-------------|-------------|
| PANDUIT P/N | WEIGHT |
| P24E01M-XYZ | SEE SHEET 2 |

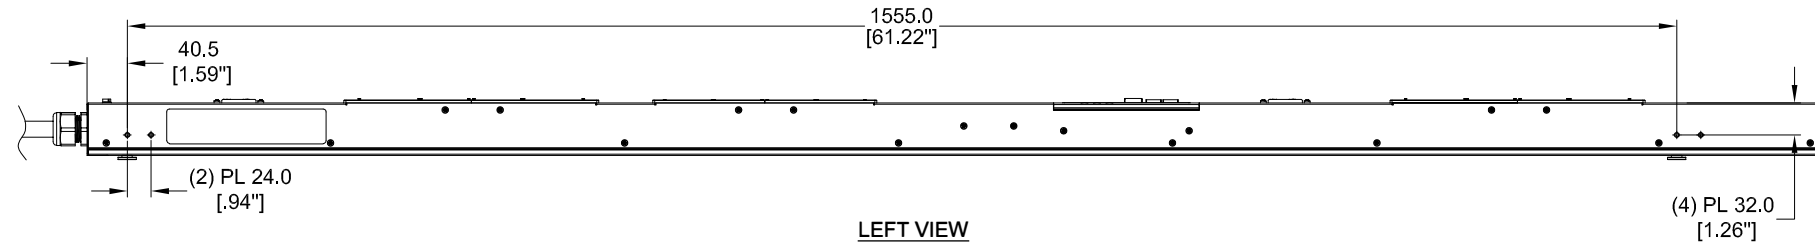

SPECIFICATION:


1. STANDARD:
- | | |
|----------------------|-----------------------------------|
| UNIT TYPE: | MONITORED SWITCHED |
| ORIENTATION: | VERTICAL, 0U, FULL |
| OUTLET QTY&TYPE: | (20) C13, (4) C19 |
| INPUT VOLTAGE: | 200-240VAC |
| INPUT CURRENT: | 32A |
| BREAKER QTY&TYPE: | (2) 16AMP, SINGLE-POLE |
| INPUT PHASE: | SINGLE-PHASE |
| RATED POWER: | 7.4kVA |
| INPUT PLUG: | IEC 60309 2P+E 6H 32A |
| INPUT POWER CORD: | SEE SHEET 2 FOR PART NUMBER TABLE |
| REGULATORY STANDARD: | RoHS COMPLIANT |
2. ADDITIONAL:
NONE
3. ACCESSORIES:
(1) QUICK-START GUIDE

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES].
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES.
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL.
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: **P24E01M-XX Y Z**

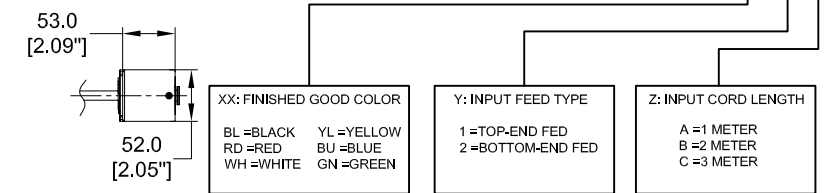

BOTTOM VIEW

PLUG/RECEPTACLE BLOCK



PLUG
IEC 60309, 2P 3W, 6H
IP44 (SPLASHPROOF)
32A, 200-250V MAX RATED INPUT



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|-----|------------|--------|-----|------|---|---------|
| 02A | 06/07/2018 | H.XU | MIM | JAWI | ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT | P24E01M |
| 01A | 07/13/2017 | GEORGE | MIM | EDM | INITIAL RELEASE | P24E01M |

| | | |
|---|--------------------|-------------------------------|
| WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY. | | SIGN |
| | | DATE |
| | | PRINT |
| TITLE INTELLIGENT SERIES PDU P24E01M-XYZ CUSTOMER DRAWING | | |
| ITEM REVISION NAME: | | |
| DATASHEET FILE NAME: | | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] | | MATERIAL/COLOR: |
| Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0 | | N/A |
| THIRD ANGLE PROJECTION | | DRAWING NUMBER: P24E01M_DC |
| DRAWN BY GEORGE | DATE 06/27/2017 | CHK SEAN |
| SCALE NONE | SHT 1 OF 2 | |
| | | SCALE B |

FOR LENGTH SEE SHEET 2 PART NUMBER TABLE.

2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| FINISHED GOOD PART NUMBER | FINISHED GOOD DESCRIPTION | COLOR | INPUT CORD LENGTH | WEIGHT |
|---------------------------|---|-------------------|-------------------------------------|--------|
| P24E01M | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, BLACK | BLACK (RAL 9005) | 3M(+254MM/-127MM) 10'[+10"/-5"] | 6.5kg |
| P24E01M-BL1A | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, BLACK | BLACK (RAL 9005) | 1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"] | 5.9kg |
| P24E01M-BL1B | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, BLACK | BLACK (RAL 9005) | 2M(+178MM/-89MM) 6.5'[+7"/-3.5"] | 6.2kg |
| P24E01M-RD1A | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, RED | RED (RAL 3020) | 1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"] | 5.9kg |
| P24E01M-RD1B | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, RED | RED (RAL 3020) | 2M(+178MM/-89MM) 6.5'[+7"/-3.5"] | 6.2kg |
| P24E01M-RD1C | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, RED | RED (RAL 3020) | 3M(+254MM/-127MM) 10'[+10"/-5"] | 6.5kg |
| P24E01M-WH1A | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, WHITE | WHITE (RAL 9003) | 1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"] | 5.9kg |
| P24E01M-WH1B | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, WHITE | WHITE (RAL 9003) | 2M(+178MM/-89MM) 6.5'[+7"/-3.5"] | 6.2kg |
| P24E01M-WH1C | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, WHITE | WHITE (RAL 9003) | 3M(+254MM/-127MM) 10'[+10"/-5"] | 6.5kg |
| P24E01M-YL1A | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, YELLOW | YELLOW (RAL 1023) | 1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"] | 5.9kg |
| P24E01M-YL1B | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, YELLOW | YELLOW (RAL 1023) | 2M(+178MM/-89MM) 6.5'[+7"/-3.5"] | 6.2kg |
| P24E01M-YL1C | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, YELLOW | YELLOW (RAL 1023) | 3M(+254MM/-127MM) 10'[+10"/-5"] | 6.5kg |
| P24E01M-BU1A | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, BLUE | BLUE (RAL 5005) | 1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"] | 5.9kg |
| P24E01M-BU1B | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, BLUE | BLUE (RAL 5005) | 2M(+178MM/-89MM) 6.5'[+7"/-3.5"] | 6.2kg |
| P24E01M-BU1C | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, BLUE | BLUE (RAL 5005) | 3M(+254MM/-127MM) 10'[+10"/-5"] | 6.5kg |
| P24E01M-GN1A | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, GREEN | GREEN (RAL 6001) | 1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"] | 5.9kg |
| P24E01M-GN1B | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, GREEN | GREEN (RAL 6001) | 2M(+178MM/-89MM) 6.5'[+7"/-3.5"] | 6.2kg |
| P24E01M-GN1C | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, GREEN | GREEN (RAL 6001) | 3M(+254MM/-127MM) 10'[+10"/-5"] | 6.5kg |
| P24E01M-BL2A | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK | BLACK (RAL 9005) | 1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"] | 5.9kg |
| P24E01M-BL2B | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, BLACK | BLACK (RAL 9005) | 2M(+178MM/-89MM) 6.5'[+7"/-3.5"] | 6.2kg |
| P24E01M-BL2C | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK | BLACK (RAL 9005) | 3M(+254MM/-127MM) 10'[+10"/-5"] | 6.5kg |
| P24E01M-RD2A | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, RED | RED (RAL 3020) | 1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"] | 5.9kg |
| P24E01M-RD2B | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, RED | RED (RAL 3020) | 2M(+178MM/-89MM) 6.5'[+7"/-3.5"] | 6.2kg |
| P24E01M-RD2C | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, RED | RED (RAL 3020) | 3M(+254MM/-127MM) 10'[+10"/-5"] | 6.5kg |
| P24E01M-WH2A | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, WHITE | WHITE (RAL 9003) | 1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"] | 5.9kg |
| P24E01M-WH2B | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, WHITE | WHITE (RAL 9003) | 2M(+178MM/-89MM) 6.5'[+7"/-3.5"] | 6.2kg |
| P24E01M-WH2C | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, WHITE | WHITE (RAL 9003) | 3M(+254MM/-127MM) 10'[+10"/-5"] | 6.5kg |
| P24E01M-YL2A | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW | YELLOW (RAL 1023) | 1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"] | 5.9kg |
| P24E01M-YL2B | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW | YELLOW (RAL 1023) | 2M(+178MM/-89MM) 6.5'[+7"/-3.5"] | 6.2kg |
| P24E01M-YL2C | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW | YELLOW (RAL 1023) | 3M(+254MM/-127MM) 10'[+10"/-5"] | 6.5kg |
| P24E01M-BU2A | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE | BLUE (RAL 5005) | 1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"] | 5.9kg |
| P24E01M-BU2B | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, BLUE | BLUE (RAL 5005) | 2M(+178MM/-89MM) 6.5'[+7"/-3.5"] | 6.2kg |
| P24E01M-BU2C | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE | BLUE (RAL 5005) | 3M(+254MM/-127MM) 10'[+10"/-5"] | 6.5kg |
| P24E01M-GN2A | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, GREEN | GREEN (RAL 6001) | 1M(+178MM/-89MM) 3.3'[+3.5"/-1.75"] | 5.9kg |
| P24E01M-GN2B | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, GREEN | GREEN (RAL 6001) | 2M(+178MM/-89MM) 6.5'[+7"/-3.5"] | 6.2kg |
| P24E01M-GN2C | VERTICAL,(20) C13,(4) C19,MONITORED SWITCHED, 200-240V/32A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, GREEN | GREEN (RAL 6001) | 3M(+254MM/-127MM) 10'[+10"/-5"] | 6.5kg |

B

B

A

A

| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|-----|------------|--------|-----|------|---|---------|
| 02A | 06/07/2018 | H.XU | MIM | JAWI | ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT | P24E01M |
| 01A | 07/13/2017 | GEORGE | MIM | EDM | INITIAL RELEASE | P24E01M |

| | | |
|---|--------------------|-------------------------------|
| WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY. | | SIGN |
| | | DATE |
| | | PRINT |
| TITLE INTELLIGENT SERIES PDU P24E01M-XXYZ CUSTOMER DRAWING | | |
| ITEM REVISION NAME: | | |
| DATASHEET FILE NAME: | | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] | | MATERIAL/COLOR: |
| THIRD ANGLE PROJECTION | | N/A |
| Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0 | | DRAWING NUMBER: P24E01M_DC |
| DRAWN BY GEORGE | DATE 06/27/2017 | SCALE NONE |
| CHK SEAN | SHT 2 OF 2 | |
| | | SCALE B |

2



1