

**Product Description:**



Nouveauté dans la gamme de dalles E1230™ PRO, la dalle LED éclairage latéral offre une répartition de la lumière de 70 % vers le bas et de 30 % vers le haut. Suspendue, elle dispose d'une structure légère et mince en aluminium et d'une finition blanche et opaque lorsqu'elle est éteinte. Idéale pour le bureau et autres applications commerciales. Boîtier de montage du driver disponible séparément.

**Product Image:**



**Line Drawing**

**Polar Curve**

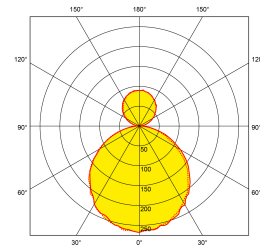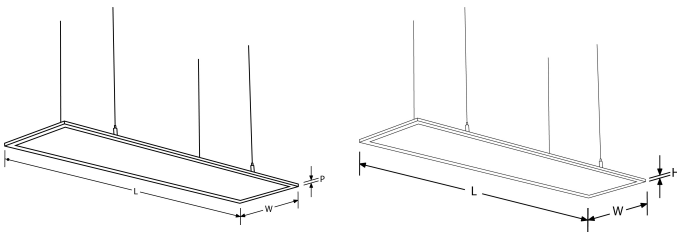

**Product Specs:**

Technology	LED	Input Voltage	220-240V AC
Positional Adjustment	Haut/bas	Number of LEDs	180
Luminaire Distribution	Direct/Indirect	Lifetime L70 (hrs)	40.000
Input Frequency	50/60HZ	Dimmable	Non
IP Rating	IP40	Fire Protection	No
Operating Env. Temp. (Min) °C	-10°C	Operating Env. Temp. (Max) °C	40°C
Optic Material	PMMA	Power Factor	0.9
Height (mm)	10	Length (mm)	1195
Width (mm)	295		

**SKU Table and Ordering:**

SKU Code	Wattage	Beam Angle	Lumens	Lumens/Watt	CRI	Colour	Finish Colour
EN-SU1230/40	40	110	3600	90	80	4000	Blanc
EN-SU1230DA/40	40	110	3600	90	80	4000	Blanc
EN-SU1230V/40	40	110	3600	90	80	4000	Blanc

**Compliance & Approvals:**



## **Warranty:**

---

This product has a guarantee period of . Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.

### **UK Head Office**

Apex Park  
6 Little Burrow  
Welwyn Garden City AL7 4SW  
United Kingdom  
Tel : +44 (0) 1727 83 66 11